



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
5410009139-03K16
 Component
Transmission (Auto)
 Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm. (Customer Sample Comment: 41900 8219 km / 949 hrs)

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0876137	WC877952	WC877988
Sample Date		Client Info		23 May 2024	13 Jul 2022	14 Aug 2020
Machine Age	kms	Client Info		7556	7556	228
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>230	19	24	22
Chromium	ppm	ASTM D5185(m)	>2	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>5	<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>65	4	7	6
Lead	ppm	ASTM D5185(m)	>55	13	33	27
Copper	ppm	ASTM D5185(m)	>85	30	66	52
Tin	ppm	ASTM D5185(m)	>5	<1	2	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	3	4	3
Potassium	ppm	ASTM D5185(m)	>20	<1	1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		6	7	6
Boron	ppm	ASTM D5185(m)		200	193	193
Barium	ppm	ASTM D5185(m)		4	12	12
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		4	7	7
Calcium	ppm	ASTM D5185(m)		177	212	212
Phosphorus	ppm	ASTM D5185(m)		472	484	495
Zinc	ppm	ASTM D5185(m)		36	61	58
Sulfur	ppm	ASTM D5185(m)		1542	1582	1568
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	34.3	35.6	36.1

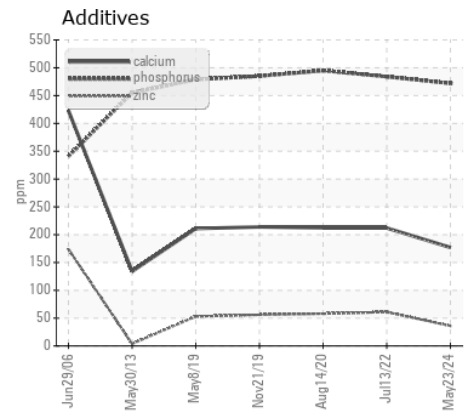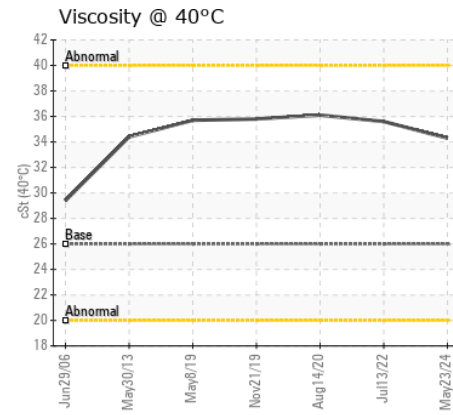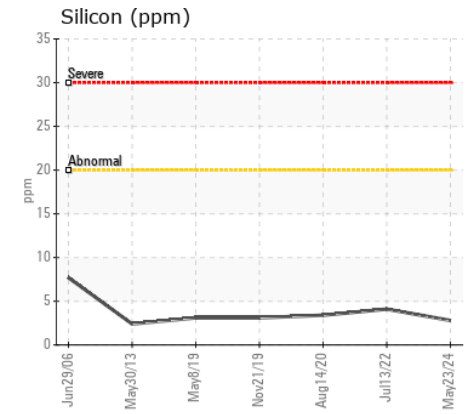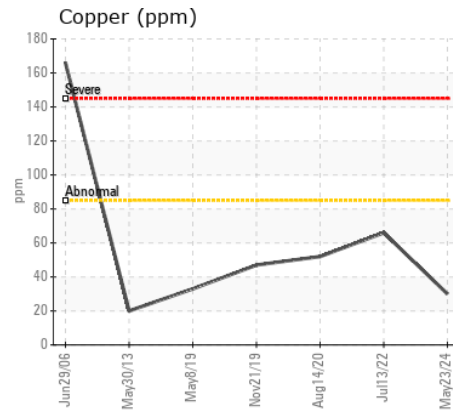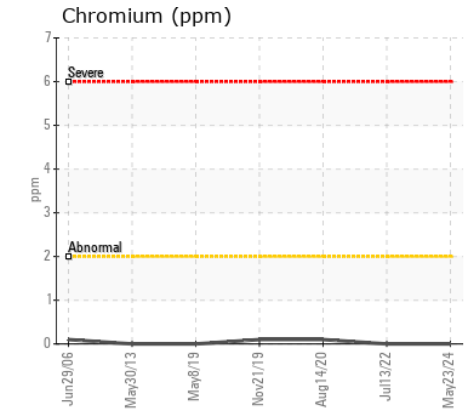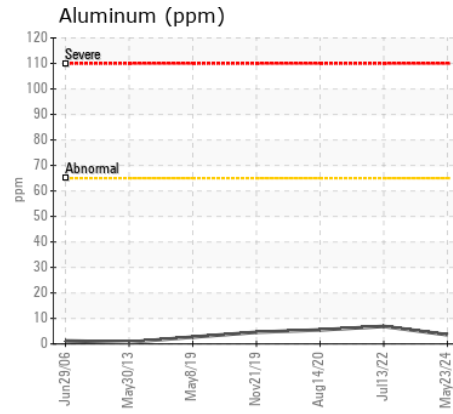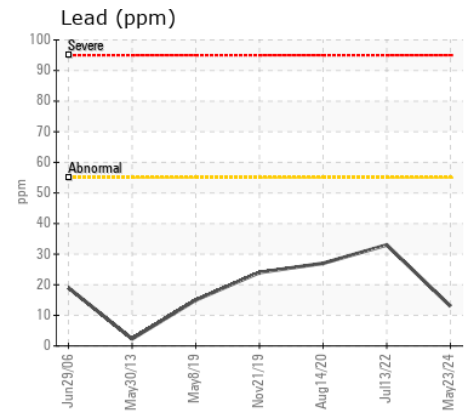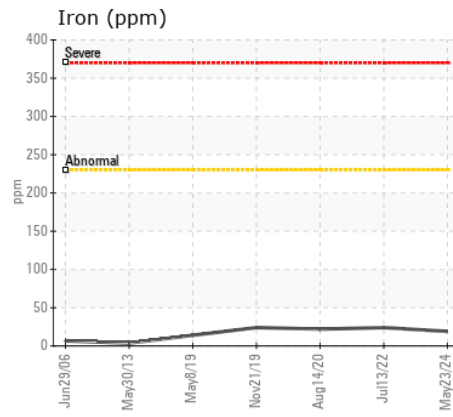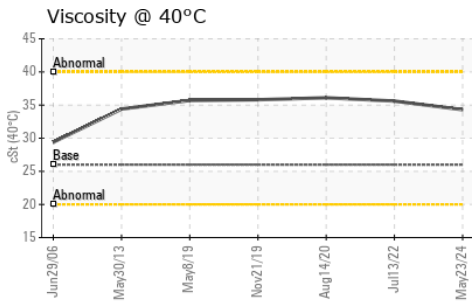

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0876137
Lab Number : 02643244
Unique Number : 5800783
Test Package : MOB 1
Received : 20 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Kevin Marson

DEPARTMENT OF NATIONAL DEFENSE
 MGEN.GEORGE R.PEARKE'S BUILDING
 OTTAWA, ON
 CA K1A 0K2
 Contact: Philippe Charron
 philippe.charron@forces.gc.ca
 T: (514)252-2777
 F: (819)997-9989

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.