



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CFR#41900
Machine Id
0025
Component
Right Final Drive
Fluid
DEXRON III (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm. (Customer Sample Comment: 41900 8219 km / 949 hrs)

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0876138	WC877689	WC877632
Sample Date		Client Info		23 May 2024	22 Nov 2023	13 May 2023
Machine Age	kms	Client Info		7846	0	7846
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
<hr/>						
Iron	ppm	ASTM D5185(m)	>500	121	79	54
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>10	2	2	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	4	6	5
Lead	ppm	ASTM D5185(m)	>25	0	<1	0
Copper	ppm	ASTM D5185(m)	>50	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	LIGHT	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
<hr/>						
Silicon	ppm	ASTM D5185(m)	>75	4	5	5
Potassium	ppm	ASTM D5185(m)	>20	<1	1	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
<hr/>						
Sodium	ppm	ASTM D5185(m)		1	2	2
Boron	ppm	ASTM D5185(m)		152	150	145
Barium	ppm	ASTM D5185(m)		<1	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		1	<1	<1
Magnesium	ppm	ASTM D5185(m)		1	<1	<1
Calcium	ppm	ASTM D5185(m)		74	73	71
Phosphorus	ppm	ASTM D5185(m)		332	337	355
Zinc	ppm	ASTM D5185(m)		13	14	11
Sulfur	ppm	ASTM D5185(m)		692	851	889
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	36.3	36.4	36.5

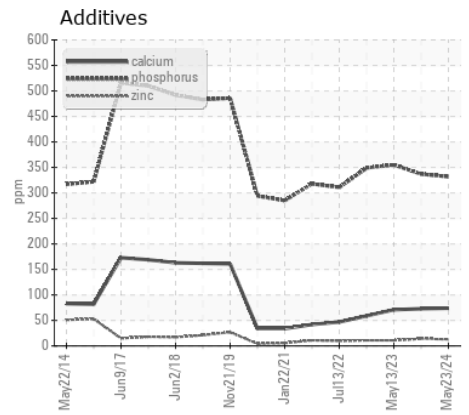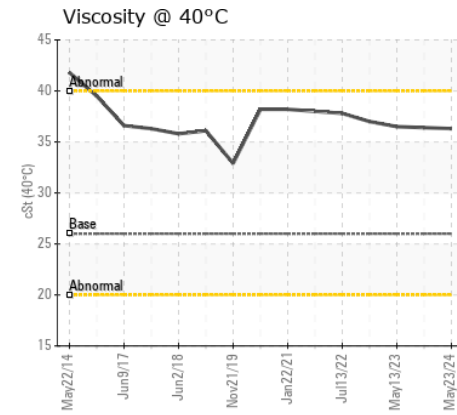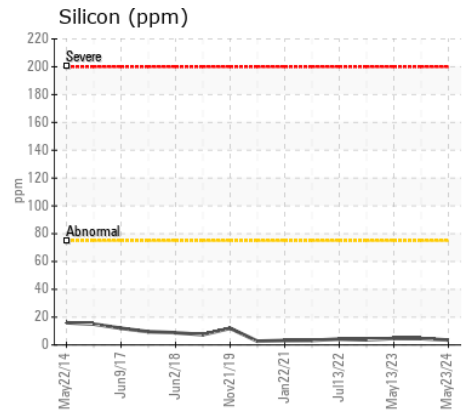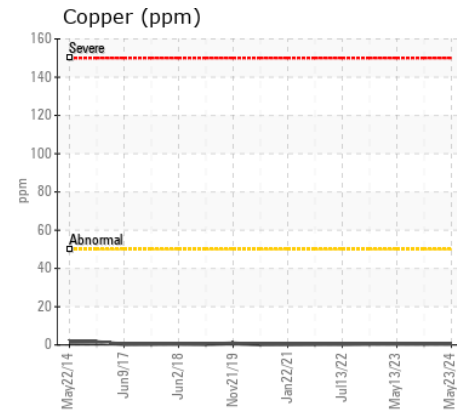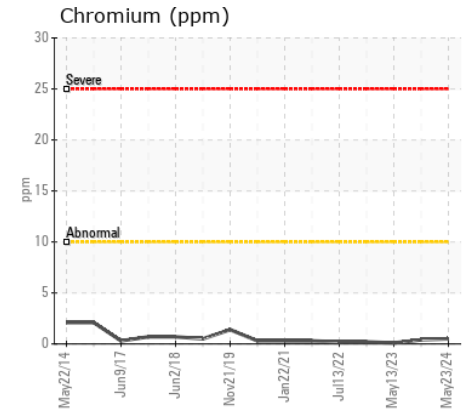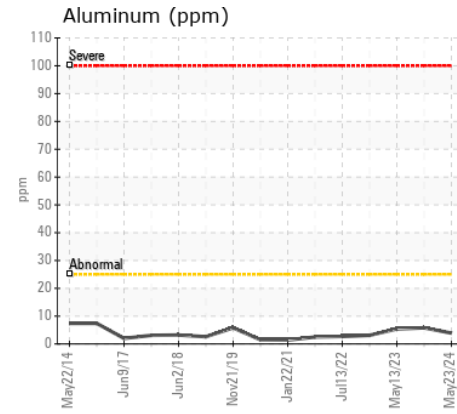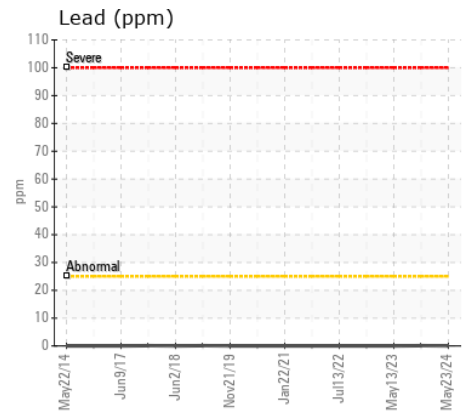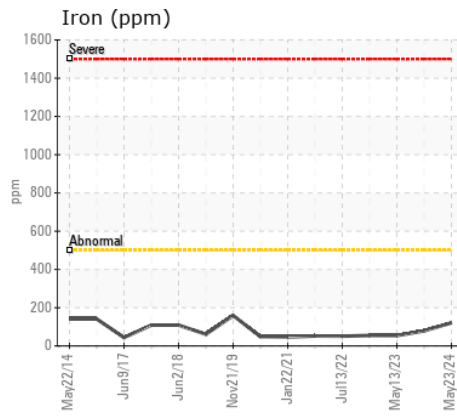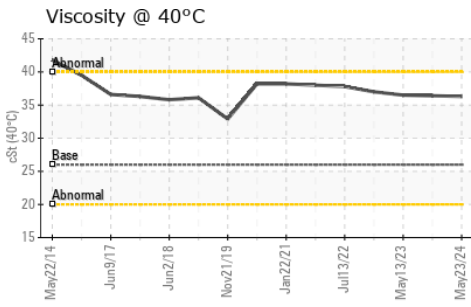

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0876138
Lab Number : 02643253
Unique Number : 5800792
Test Package : MOB 1
Received : 20 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Kevin Marson

DEPARTMENT OF NATIONAL DEFENSE
 MGEN.GEORGE R.PEARKE'S BUILDING
 OTTAWA, ON
 CA K1A 0K2
 Contact: Philippe Charron
 philippe.charron@forces.gc.ca
 T: (514)252-2777
 F: (819)997-9989

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.