



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
GMS-1200 (S/N 1038)
 Component
Gearbox
 Fluid
SHELL TURBO T ISO 68 (9 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.









CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0954290	WC0904620	WC0853655
Sample Date		Client Info		17 Jun 2024	30 Jan 2024	15 Sep 2023
Machine Age	mths	Client Info		32	0	0
Oil Age	mths	Client Info		0	6	4
Filter Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		N/A	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL
PQ		ASTM D8184*		2	0	7
Iron	ppm	ASTM D5185(m)	>200	4	3	8
Chromium	ppm	ASTM D5185(m)	>15	0	0	0
Nickel	ppm	ASTM D5185(m)	>15	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>100	0	0	<1
Copper	ppm	ASTM D5185(m)	>200	0	0	<1
Tin	ppm	ASTM D5185(m)	>25	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>50	<1	2	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		0	0	0
Boron	ppm	ASTM D5185(m)		<1	0	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	2	0
Calcium	ppm	ASTM D5185(m)		<1	3	<1
Phosphorus	ppm	ASTM D5185(m)		4	2	2
Zinc	ppm	ASTM D5185(m)		3	5	4
Sulfur	ppm	ASTM D5185(m)		207	32	556
Acid Number (AN)	mg KOH/g	ASTM D974*	.05	0.03	0.03	0.06
Visc @ 40°C	cSt	ASTM D7279(m)	68	66.2	65.8	66.1

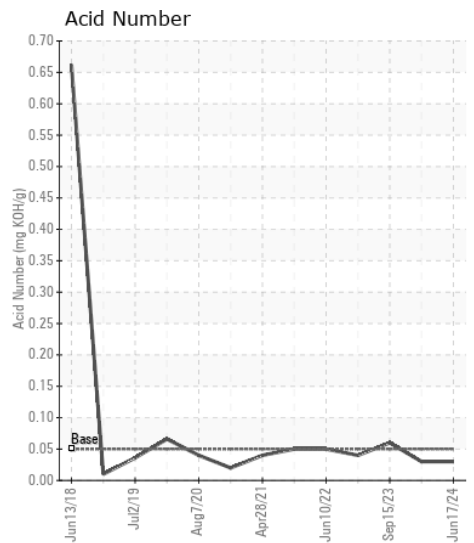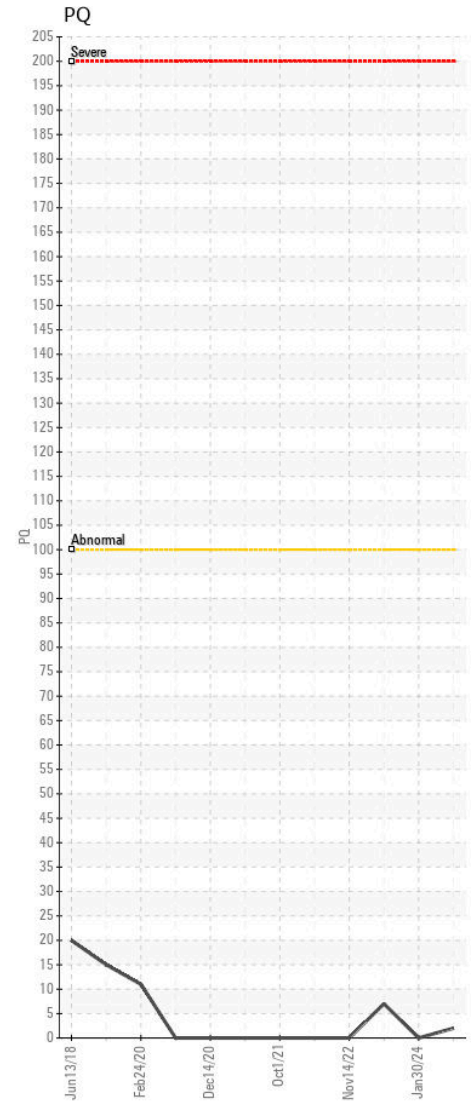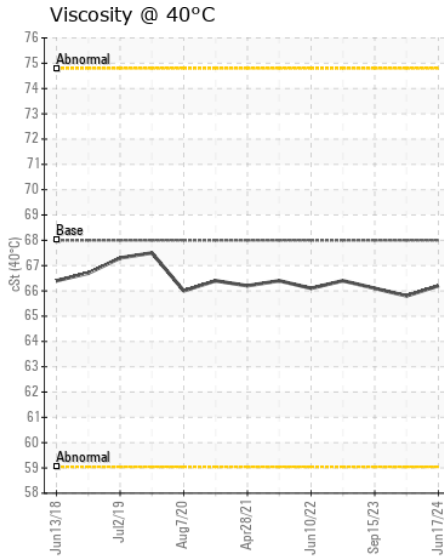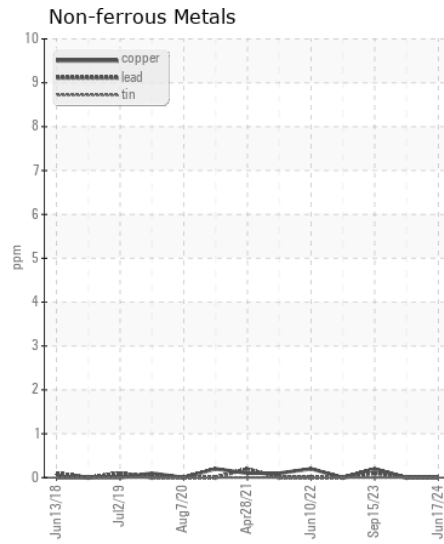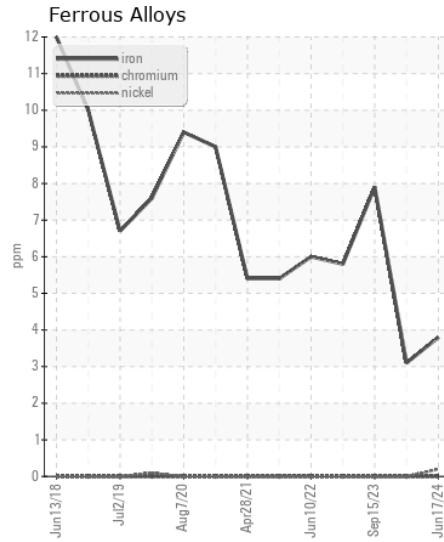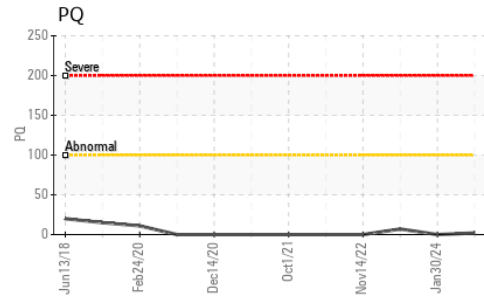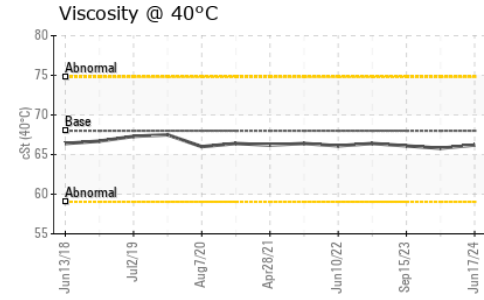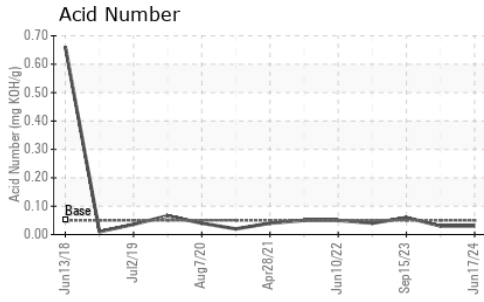

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0954290 **Received** : 20 Jun 2024
Lab Number : 02643276 **Tested** : 20 Jun 2024
Unique Number : 5800815 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Brita Canada Corp.
 102 Parkshore Drive
 Brampton, ON
 CA L6T 5M1
 Contact: Lito Capinpin
 joselito.capinpin@clorox.com
 T: (905)789-2483
 F: (905)793-4008