

Area  
**MICHAUDVILLE**  
Machine Id  
**1205**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0084197</b>	PC0084408	PC0082566
Sample Date		Client Info		<b>20 Jun 2024</b>	28 Feb 2024	24 Oct 2023
Machine Age	hrs	Client Info		<b>15420</b>	14906	14453
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>5</b>	5	6
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	3	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	6	4
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	2	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.5</b>	6.5	6.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.7</b>	19.1	18.8
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	1	1
Boron	ppm	ASTM D5185(m)	250	<b>1</b>	<1	2
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>56</b>	55	57
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	450	<b>927</b>	911	936
Calcium	ppm	ASTM D5185(m)	3000	<b>1048</b>	1160	1101
Phosphorus	ppm	ASTM D5185(m)	1150	<b>974</b>	1004	1000
Zinc	ppm	ASTM D5185(m)	1350	<b>1158</b>	1154	1163
Sulfur	ppm	ASTM D5185(m)	4250	<b>2579</b>	2752	2584
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.4</b>	15.0	14.6
Visc @ 40°C	cSt	ASTM D7279(m)	73	<b>94.7</b>	91.9	92.5
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>13.9</b>	13.8	13.8
Viscosity Index (VI)	Scale	ASTM D2270*	138	<b>149</b>	153	151

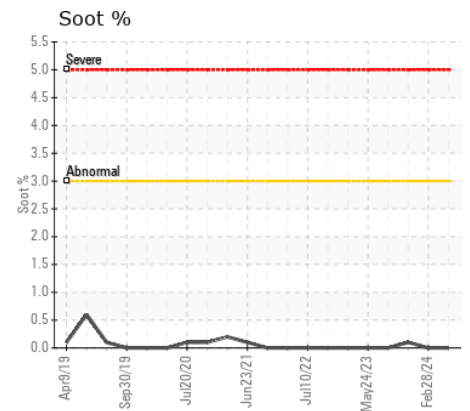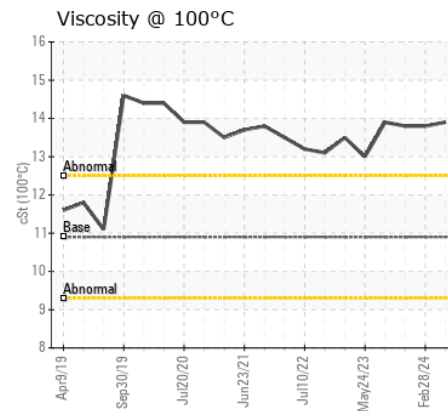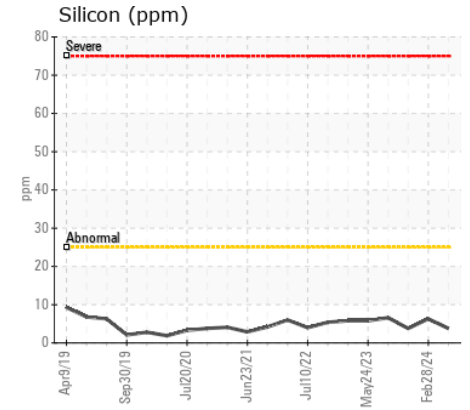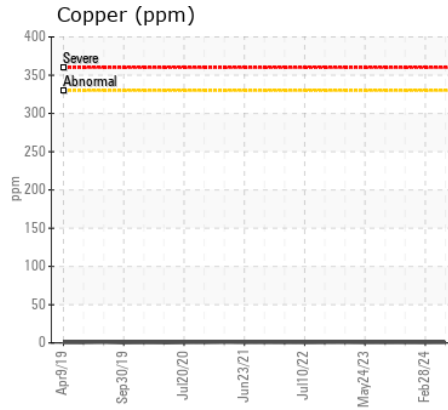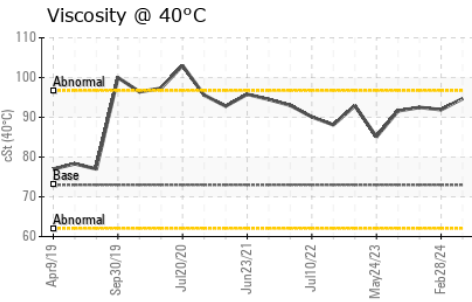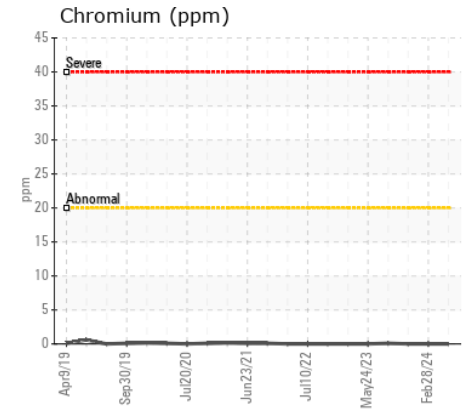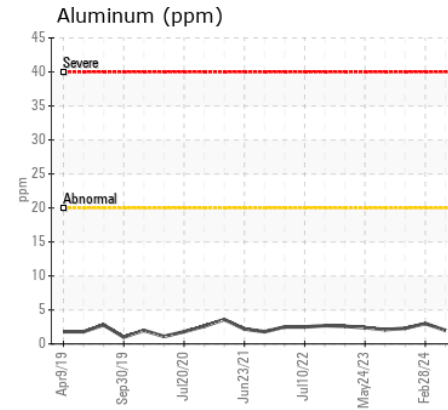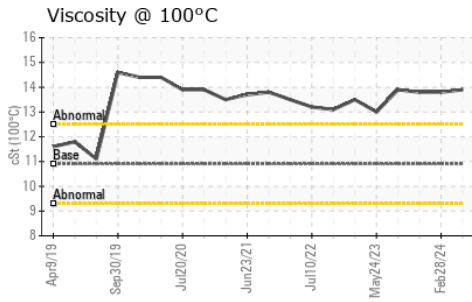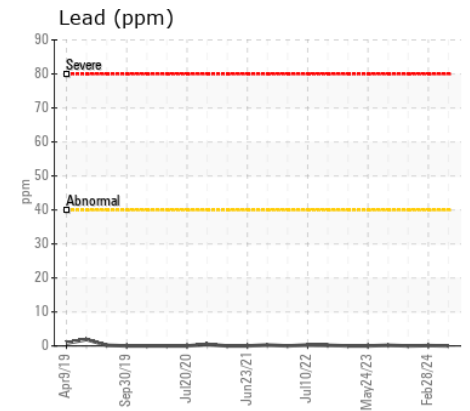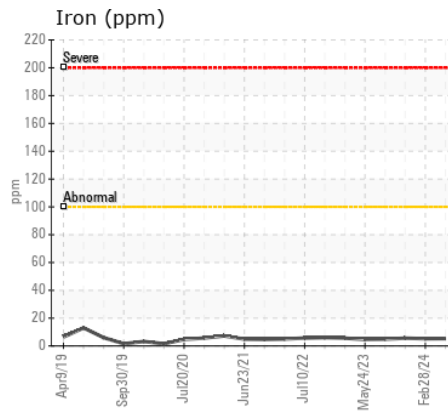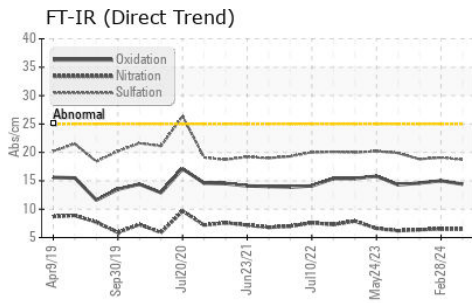

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0084197  
**Lab Number** : 02643367  
**Unique Number** : 5800906  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**LES ENTREPRISES MICHAUVILLE INC.**  
 270 RUE BRUNET  
 MONT ST-HILAIRE, QC  
 CA J3H 0M6  
 Contact: Martin Trudel  
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: