



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[157457]
 Machine Id
5KH866
 Component
Transmission
 Fluid
SAE 30W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CU0021217	---	---
Sample Date		Client Info		18 Jun 2024	---	---
Machine Age	hrs	Client Info		2092	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>200	13	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)		<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		3	---	---
Aluminum	ppm	ASTM D5185(m)	>50	<1	---	---
Lead	ppm	ASTM D5185(m)	>50	10	---	---
Copper	ppm	ASTM D5185(m)	>200	117	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>50	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		10	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		62	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		143	---	---
Calcium	ppm	ASTM D5185(m)		2271	---	---
Phosphorus	ppm	ASTM D5185(m)		767	---	---
Zinc	ppm	ASTM D5185(m)		859	---	---
Sulfur	ppm	ASTM D5185(m)		5897	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	95.0	105	---	---

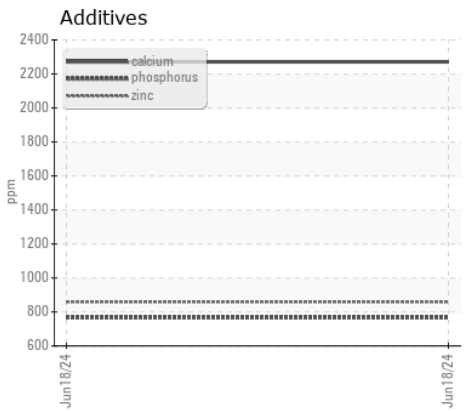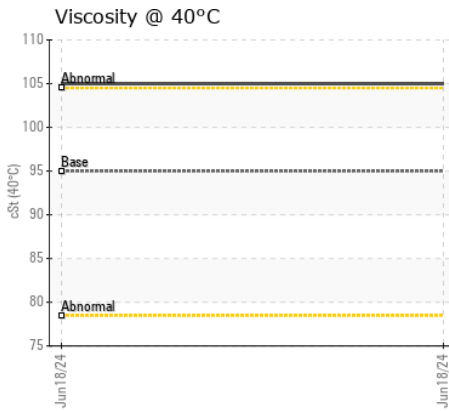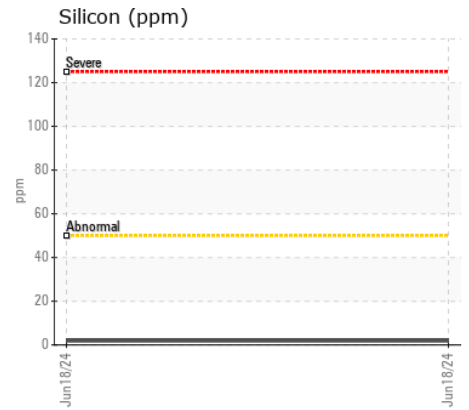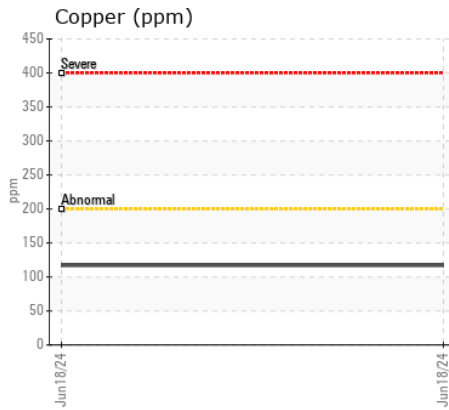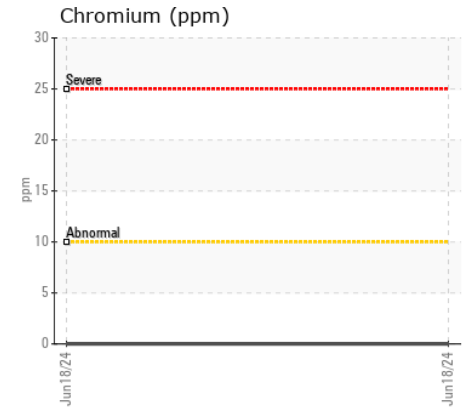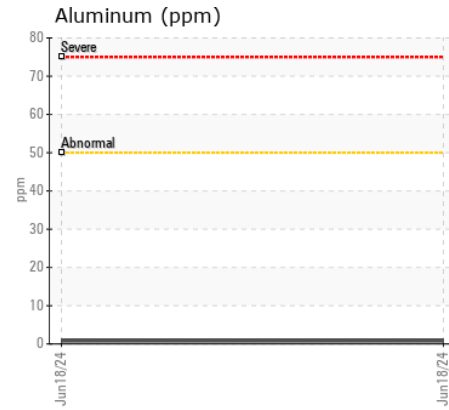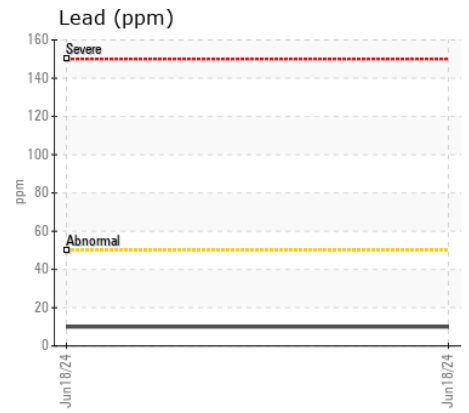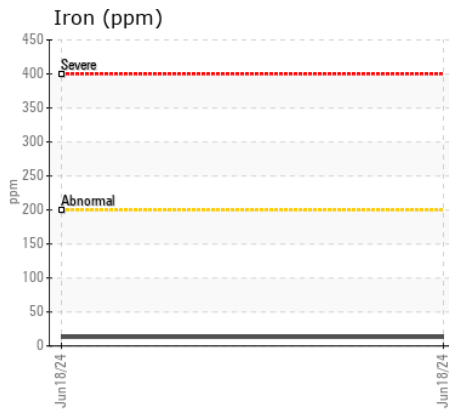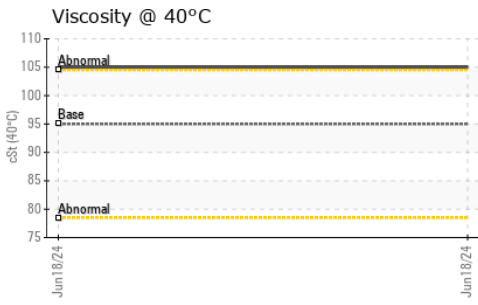

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0021217
Lab Number : 02643435
Unique Number : 5800974
Test Package : MOB 1
Received : 21 Jun 2024
Tested : 21 Jun 2024
Diagnosed : 21 Jun 2024 - Wes Davis

CUMMINS EASTERN CANADA LP
 6950 EDWARDS BLVD
 MISSISSAUGA, ON
 CA L5T 2W2
 Contact: Jeffrey Moore
 jeffrey.moore@cummins.com
 T: (905)795-0050
 F: (905)795-0035

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.