



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR A934C 063551**  
Component  
**Front Left Planetary**  
Fluid  
**PETRO CANADA TRAXON SYNTHETIC 75W90 (5 LTR)**

### RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0286382</b>	LH0284067	LH0260525
Sample Date		Client Info		<b>14 Jun 2024</b>	18 Mar 2024	15 Nov 2023
Machine Age	hrs	Client Info		<b>19528</b>	19058	18492
Oil Age	hrs	Client Info		<b>470</b>	566	703
Filter Age	hrs	Client Info		<b>470</b>	566	703
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	MARGINAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>300	<b>200</b>	244	▲ 300
Chromium	ppm	ASTM D5185(m)	>4	<b>1</b>	1	2
Nickel	ppm	ASTM D5185(m)	>3	<b>1</b>	<1	1
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>7	<b>2</b>	3	3
Lead	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185(m)	>90	<b>11</b>	13	17
Tin	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	<b>10</b>	14	17
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	6	7
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.  
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>5</b>	6	7
Boron	ppm	ASTM D5185(m)	328	<b>134</b>	169	174
Barium	ppm	ASTM D5185(m)	1	<b>1</b>	1	1
Molybdenum	ppm	ASTM D5185(m)		<b>2</b>	3	4
Manganese	ppm	ASTM D5185(m)		<b>2</b>	2	3
Magnesium	ppm	ASTM D5185(m)	1	<b>27</b>	38	45
Calcium	ppm	ASTM D5185(m)	7	<b>42</b>	60	76
Phosphorus	ppm	ASTM D5185(m)	1145	<b>1022</b>	969	992
Zinc	ppm	ASTM D5185(m)	3	<b>63</b>	83	107
Sulfur	ppm	ASTM D5185(m)	17909	<b>17331</b>	16371	16162
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>119</b>	131	128

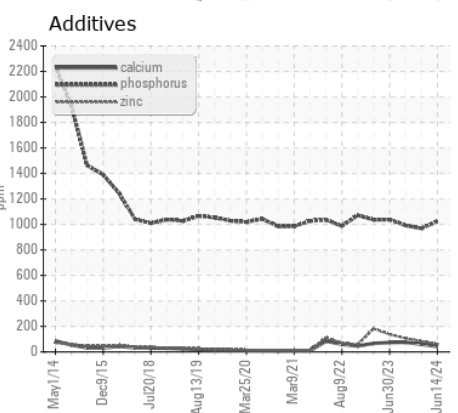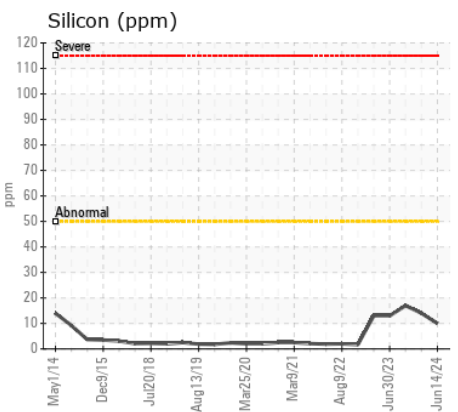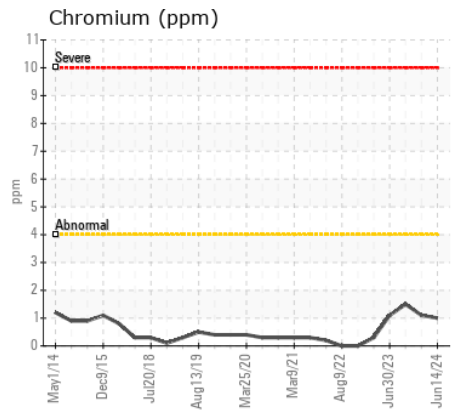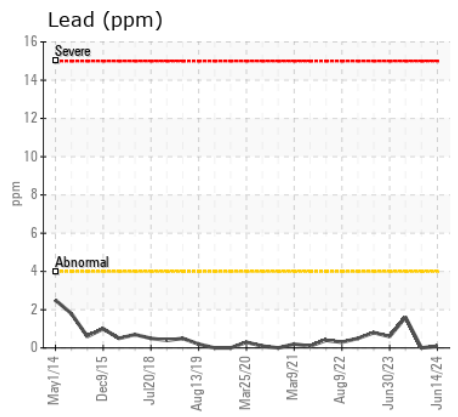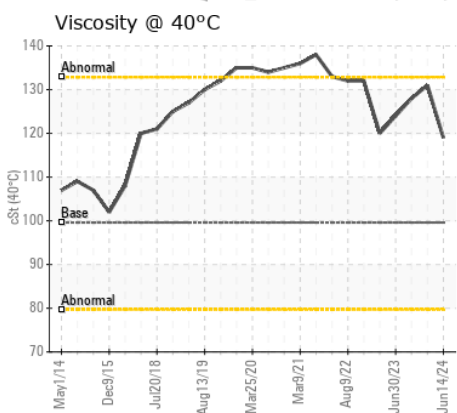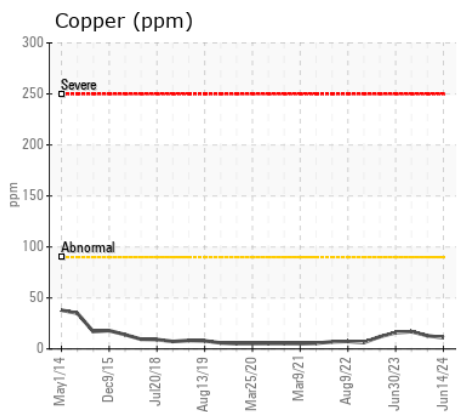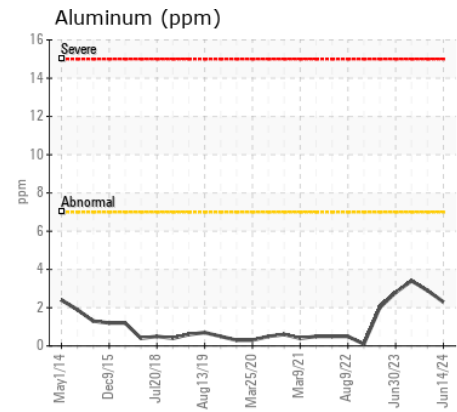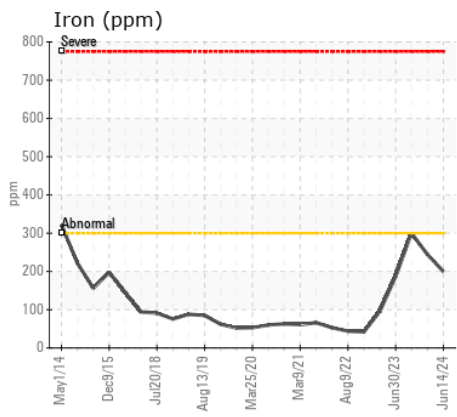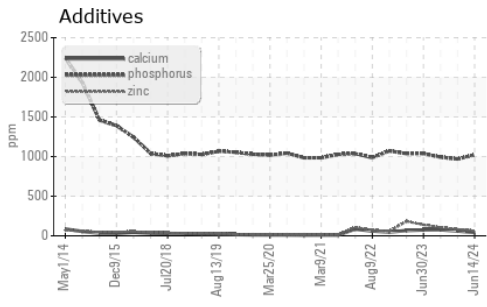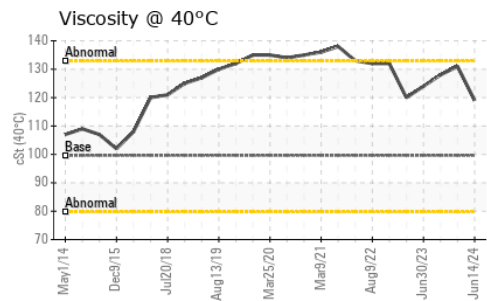

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0286382 **Received** : 21 Jun 2024  
**Lab Number** : 02643443 **Tested** : 21 Jun 2024  
**Unique Number** : 5800982 **Diagnosed** : 21 Jun 2024 - Wes Davis  
**Test Package** : MOB 1

**ABC RECYCLING**  
 750C JACKSON RD  
 NANAIMO, BC  
 CA V9X 1J2  
 Contact: Jordie Richmond  
 jordie.richmond@abcrcycling.com  
 T: (250)202-8235  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.