



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR A934C 063551
Component
Rear Left Planetary
Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (3 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0286412	LH0284070	LH0246841
Sample Date		Client Info		14 Jun 2024	18 Mar 2024	15 Nov 2023
Machine Age	hrs	Client Info		19528	19058	18492
Oil Age	hrs	Client Info		470	566	703
Filter Age	hrs	Client Info		470	566	703
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>300	18	48	36
Chromium	ppm	ASTM D5185(m)	>4	0	0	0
Nickel	ppm	ASTM D5185(m)	>3	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>7	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>4	<1	0	<1
Copper	ppm	ASTM D5185(m)	>90	26	31	25
Tin	ppm	ASTM D5185(m)	>3	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	VLITE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	2	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)	328	290	265	256
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)	1	1	1	2
Calcium	ppm	ASTM D5185(m)	7	5	4	9
Phosphorus	ppm	ASTM D5185(m)	1145	1146	962	1005
Zinc	ppm	ASTM D5185(m)	3	15	22	18
Sulfur	ppm	ASTM D5185(m)	17909	19524	17144	17737
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	103	139	140

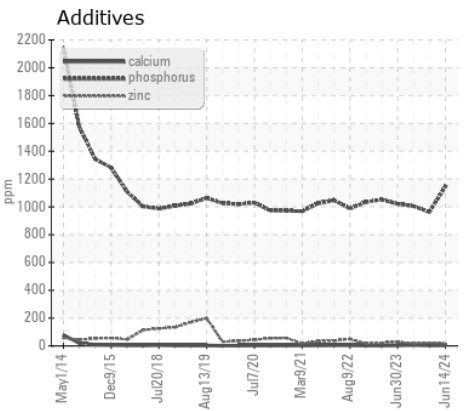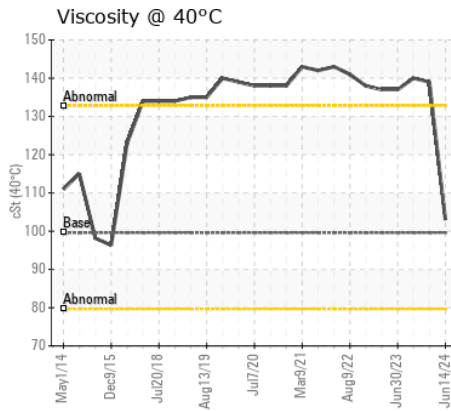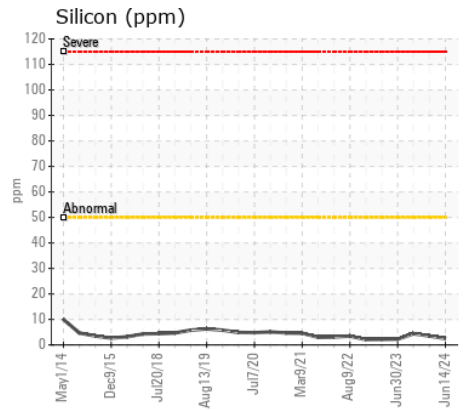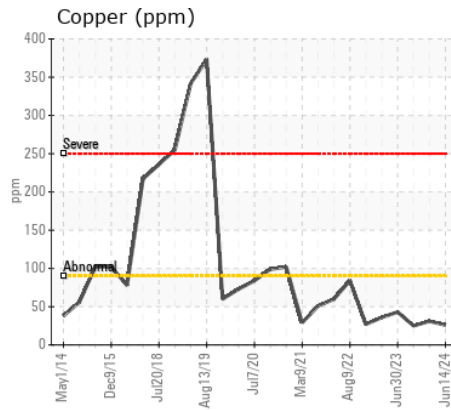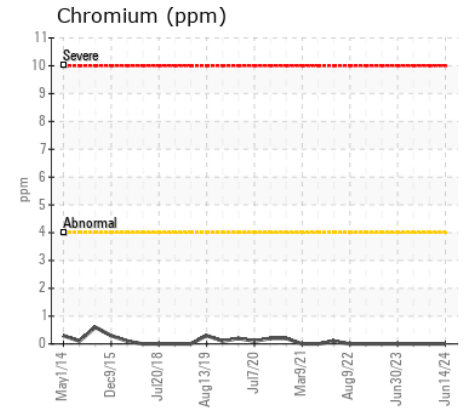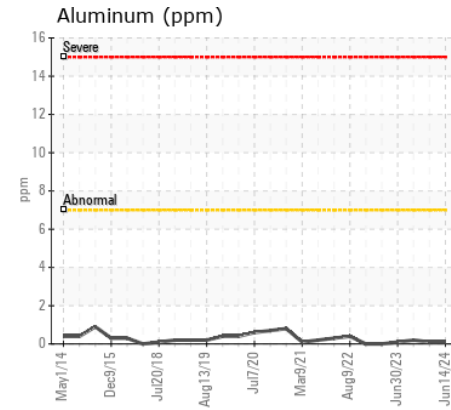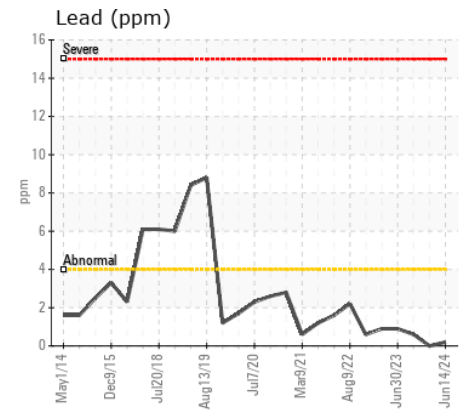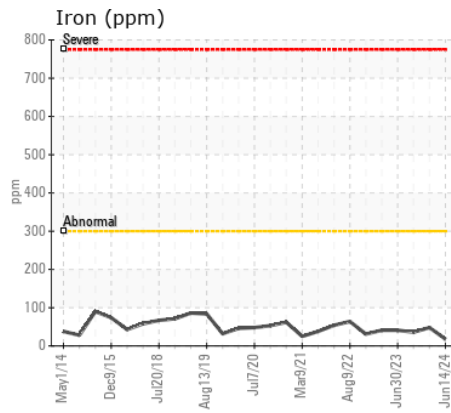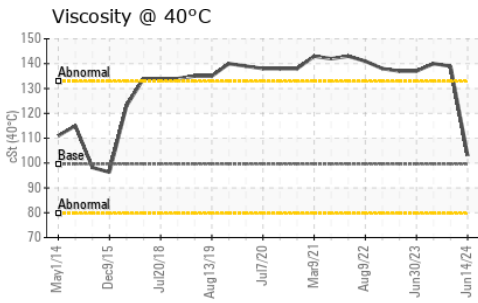

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0286412
Lab Number : 02643445
Unique Number : 5800984
Test Package : MOB 1

Received : 21 Jun 2024
Tested : 21 Jun 2024
Diagnosed : 21 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

ABC RECYCLING
 750C JACKSON RD
 NANAIMO, BC
 CA V9X 1J2

Contact: Jordie Richmond
 jordie.richmond@abcrcycling.com
 T: (250)202-8235
 F: