



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 146757

Component
Rear Left Wheel Hub

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289564	LH0281559	LH0144135
Sample Date		Client Info		12 Jun 2024	11 Dec 2023	16 Aug 2023
Machine Age	hrs	Client Info		1995	1075	507
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>450	5	5	8
Chromium	ppm	ASTM D5185(m)	>4	0	0	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<1	<1	1
Lead	ppm	ASTM D5185(m)	>4	0	<1	0
Copper	ppm	ASTM D5185(m)	>75	2	3	3
Tin	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	<1	2	6
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	5	16
Boron	ppm	ASTM D5185(m)	328	196	27	108
Barium	ppm	ASTM D5185(m)	1	<1	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		<1	0	2
Magnesium	ppm	ASTM D5185(m)	1	2	3	10
Calcium	ppm	ASTM D5185(m)	7	298	933	3541
Phosphorus	ppm	ASTM D5185(m)	1145	1245	1061	1226
Zinc	ppm	ASTM D5185(m)	3	124	380	1431
Sulfur	ppm	ASTM D5185(m)	17909	19530	16346	2852
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	103	92.8	65.3

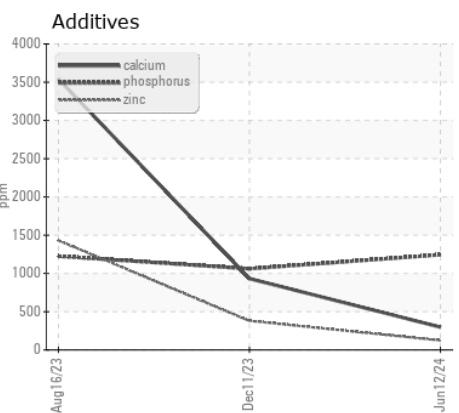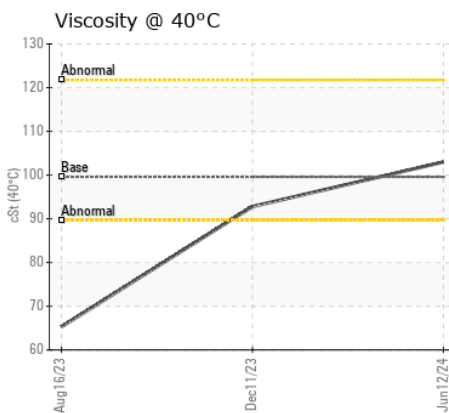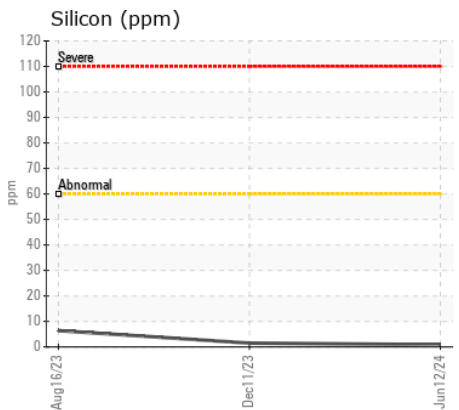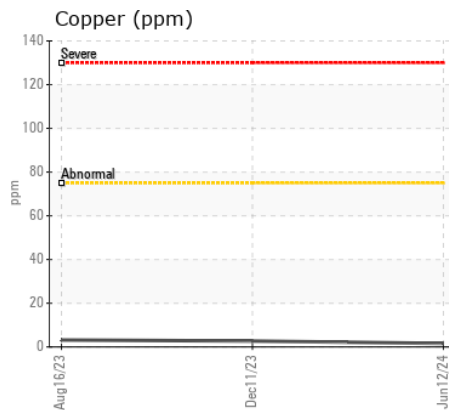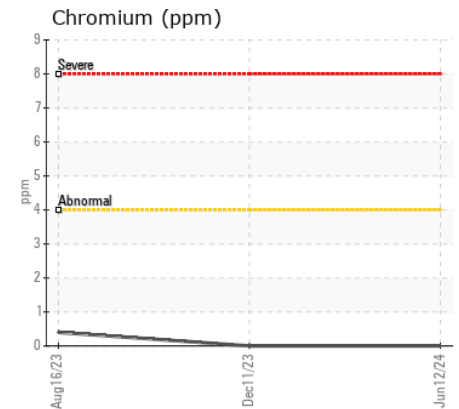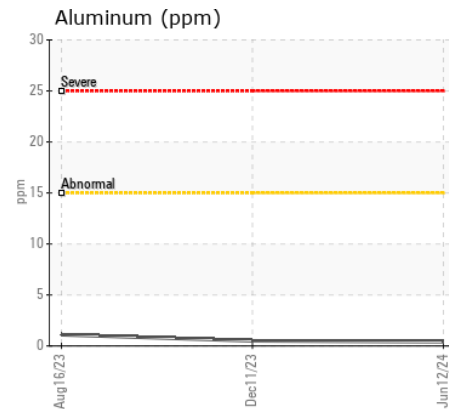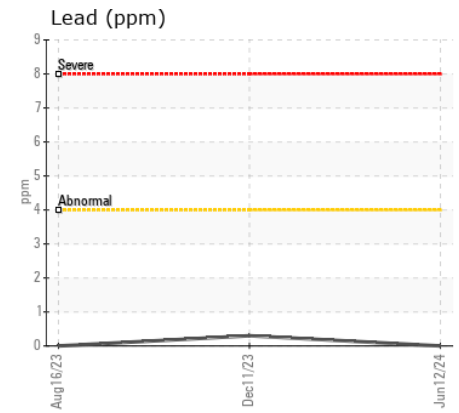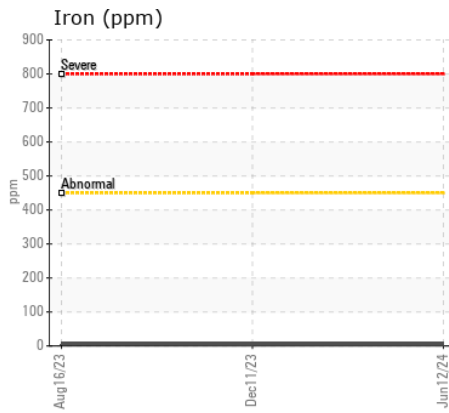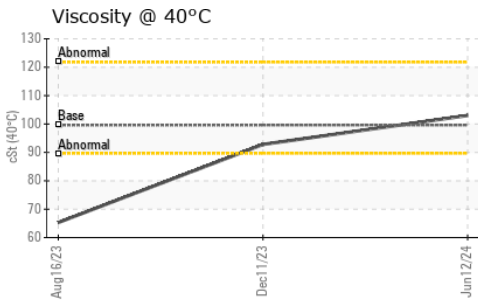

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0289564
Lab Number : 02643461
Unique Number : 5801000
Test Package : MOB 1
Received : 21 Jun 2024
Tested : 21 Jun 2024
Diagnosed : 21 Jun 2024 - Wes Davis

Palmer
 3191 Albion Road
 Ottawa, ON
 CA K1V 8Y3
 Contact: Service

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: