



Machine Id  
**501036**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- LTR)**

### RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0119018</b>	GFL0102634	GFL0101736
Sample Date		Client Info		<b>13 Jun 2024</b>	05 Feb 2024	10 Dec 2023
Machine Age	kms	Client Info		<b>869837</b>	0	0
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>SEVERE</b>	NORMAL	NORMAL

### WEAR

Nickel ppm levels are severe. A sharp increase in the nickel level is noted. Exhaust valve wear is indicated.

Iron	ppm	ASTM D5185(m)	>120	<b>29</b>	28	17
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>▲ 20</b>	4	2
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	1
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	2	1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### CONTAMINATION

There is no indication of any contamination in the oil.




Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	5	5
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	1
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>4	<b>1</b>	1.1	0.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.0</b>	10.0	8.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.0</b>	21.1	20.7
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		<b>24</b>	23	30
Boron	ppm	ASTM D5185(m)	2	<b>3</b>	3	3
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	50	<b>61</b>	60	59
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m)	950	<b>953</b>	947	927
Calcium	ppm	ASTM D5185(m)	1050	<b>1045</b>	1069	1050
Phosphorus	ppm	ASTM D5185(m)	995	<b>959</b>	982	943
Zinc	ppm	ASTM D5185(m)	1180	<b>1162</b>	1155	1137
Sulfur	ppm	ASTM D5185(m)	2600	<b>2347</b>	2583	2330
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.8</b>	15.5	15.1
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.6</b>	11.7	11.9


▲ Ferrous Alloys

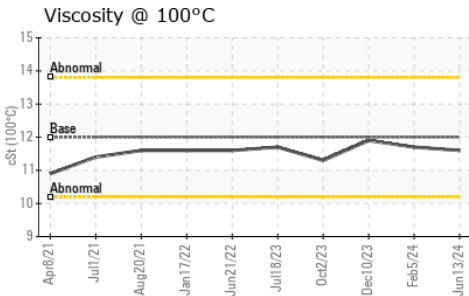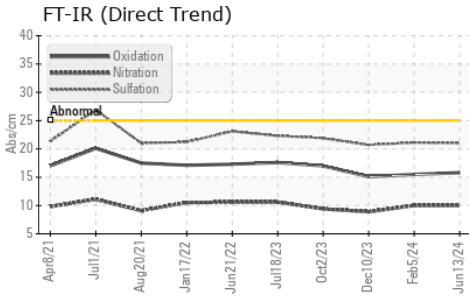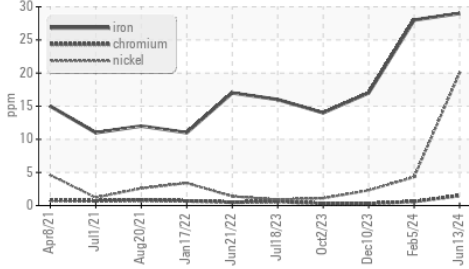


Iron (ppm)

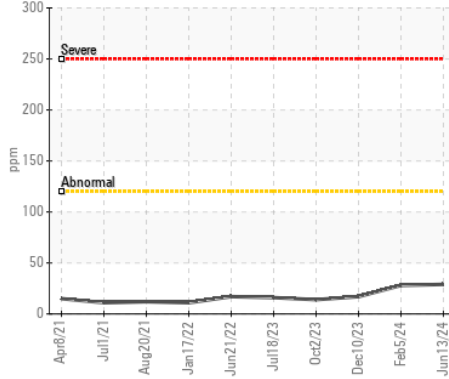


Aluminum (ppm)

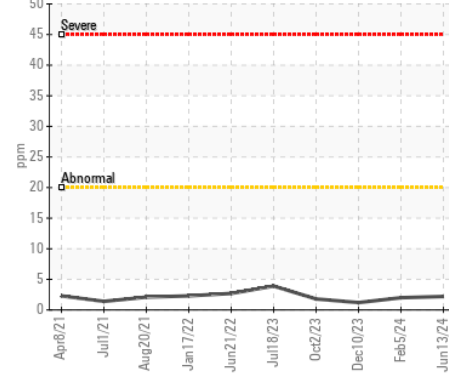


Copper (ppm)

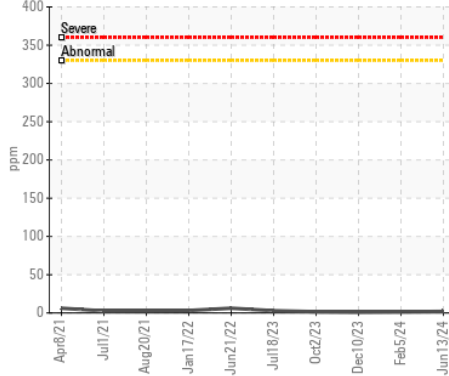


Viscosity @ 100°C

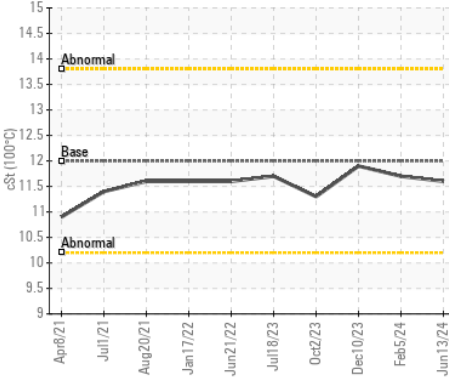


Lead (ppm)

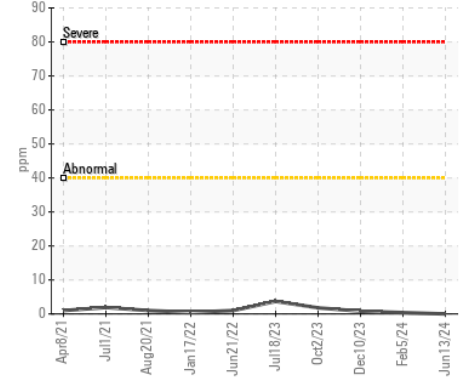


Chromium (ppm)

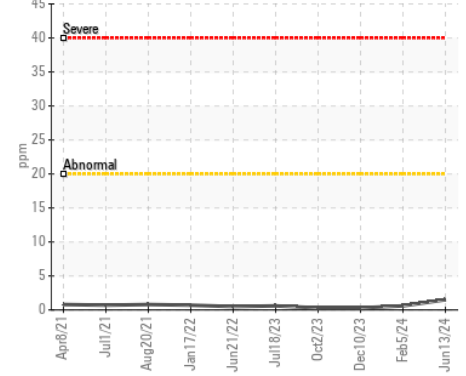

Silicon (ppm)

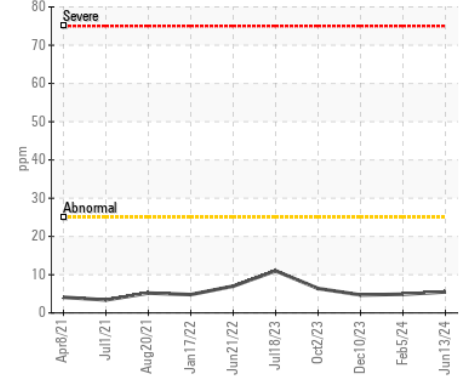

Soot %

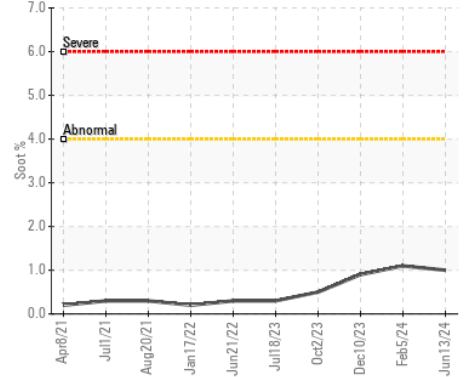

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0119018  
**Lab Number** : 02644005  
**Unique Number** : 5801544  
**Test Package** : MOB 1

**GFL Environmental - 554 - Edmonton SW**  
 8409 -15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.