

Machine Id
153001
Component
Diesel Engine
Fluid
PETRO CANADA DURON SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0119027	---	---
Sample Date		Client Info		11 Jun 2024	---	---
Machine Age	kms	Client Info		30805	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	14	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	<1	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	3	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	5	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	11	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	11.4	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.1	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)	1	3	---	---
Barium	ppm	ASTM D5185(m)	1	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	1	64	---	---
Manganese	ppm	ASTM D5185(m)	1	<1	---	---
Magnesium	ppm	ASTM D5185(m)	10	910	---	---
Calcium	ppm	ASTM D5185(m)	2942	1017	---	---
Phosphorus	ppm	ASTM D5185(m)	1102	896	---	---
Zinc	ppm	ASTM D5185(m)	1351	1111	---	---
Sulfur	ppm	ASTM D5185(m)	3903	2289	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	23.6	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	74.0	83.1	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	12.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	146	144	---	---

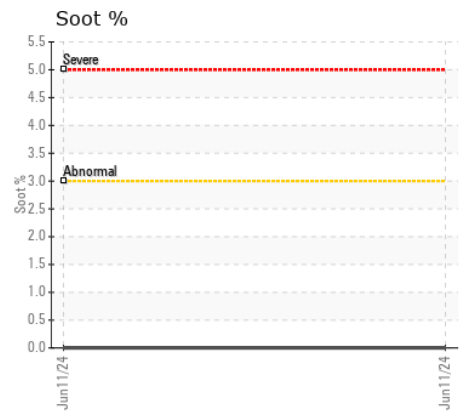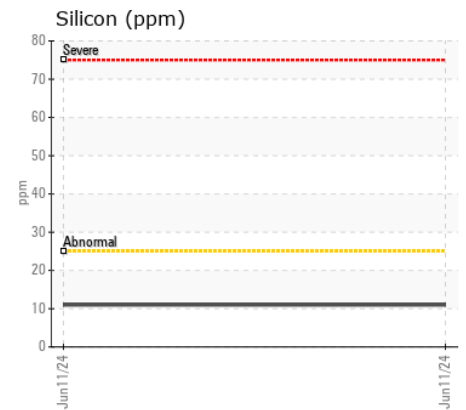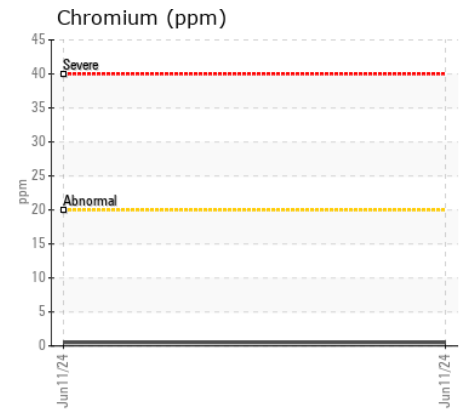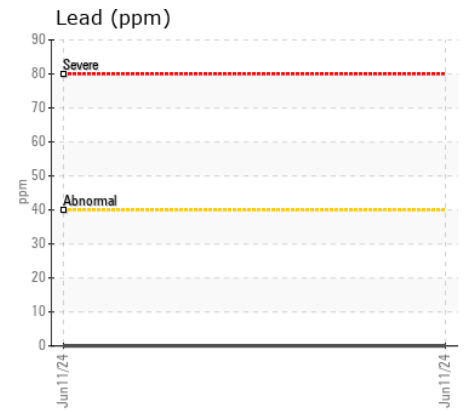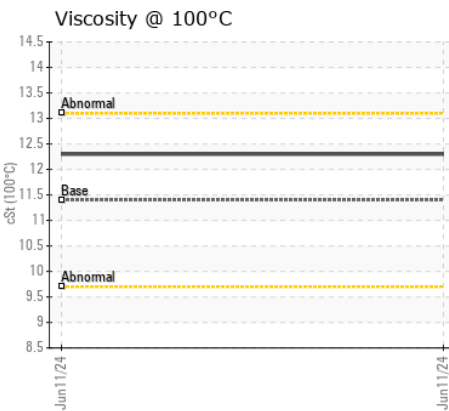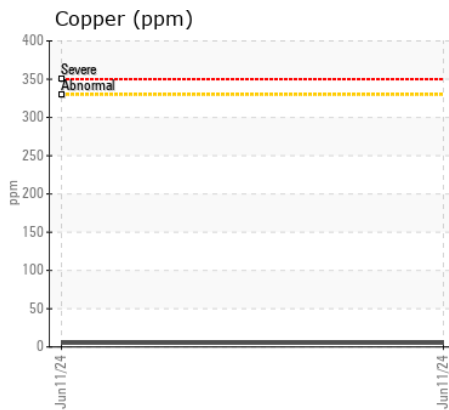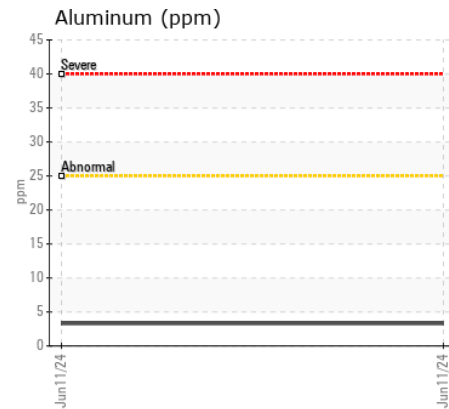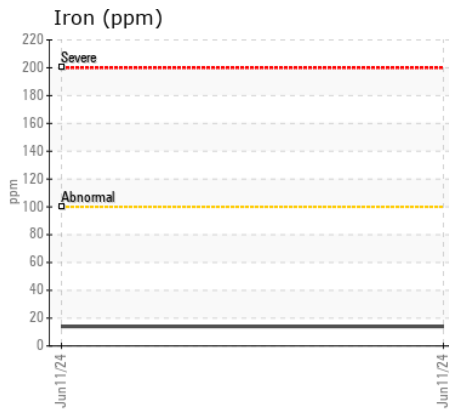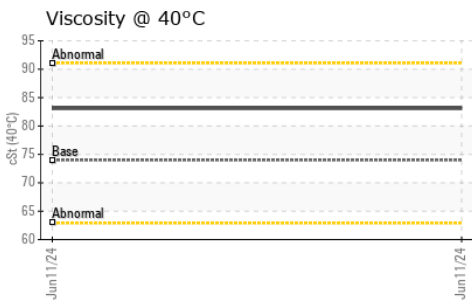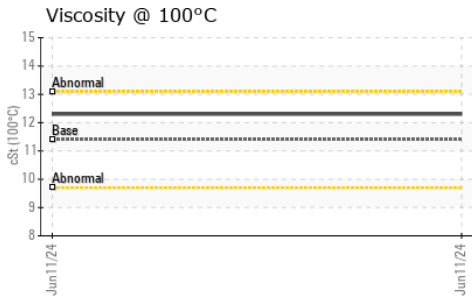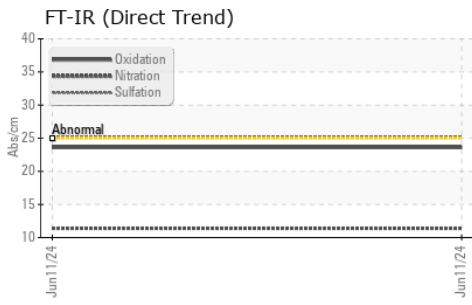

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0119027 **Received** : 25 Jun 2024
Lab Number : 02644008 **Tested** : 25 Jun 2024
Unique Number : 5801547 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.