



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
City of Mount Pearl
Machine Id
INTERNATIONAL 20-02G
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 15W40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		OF0000723	---	---
Sample Date		Client Info		17 Jun 2024	---	---
Machine Age	hrs	Client Info		4490	---	---
Oil Age	hrs	Client Info		1039	---	---
Filter Age	hrs	Client Info		250	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	28	---	---
Chromium	ppm	ASTM D5185(m)	>20	1	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	5	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	3	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION














There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>6	0.6	---	---
Nitration	Abs/cm	ASTM D7624*	>20	11.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.5	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>158	6	---	---
Boron	ppm	ASTM D5185(m)	250	<1	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	58	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	450	919	---	---
Calcium	ppm	ASTM D5185(m)	3000	1023	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	885	---	---
Zinc	ppm	ASTM D5185(m)	1350	1152	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2353	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.2	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		2.89	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	8.5	7.58	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	115	99.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	126	133	---	---

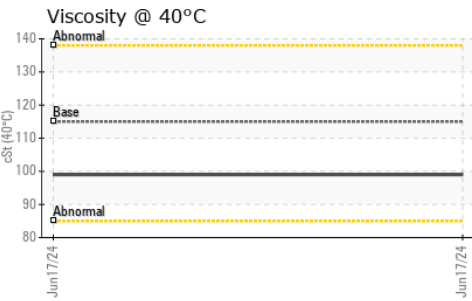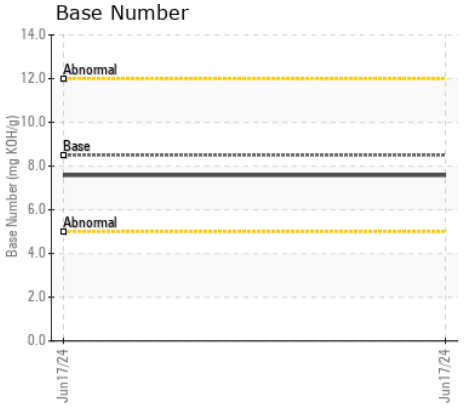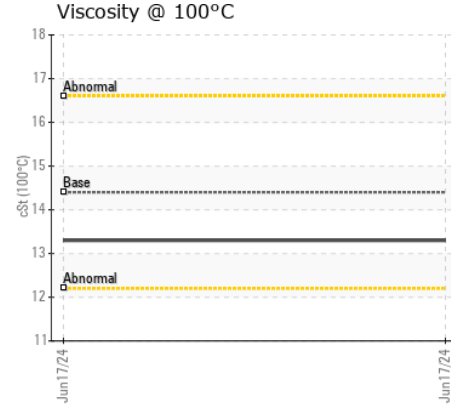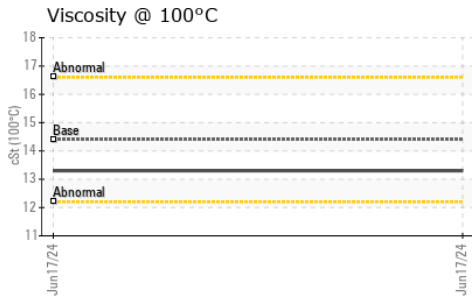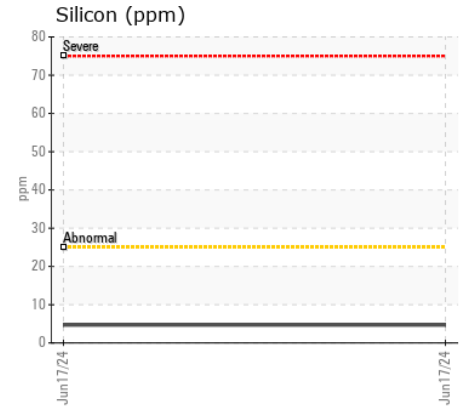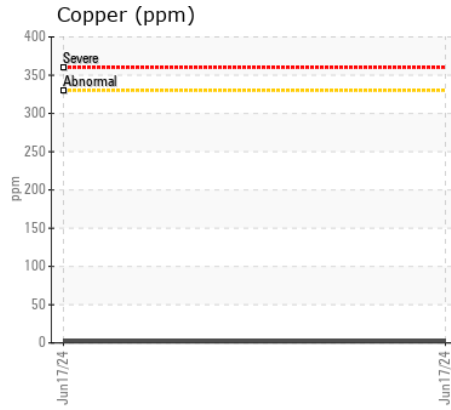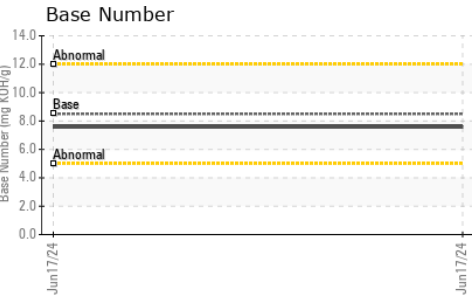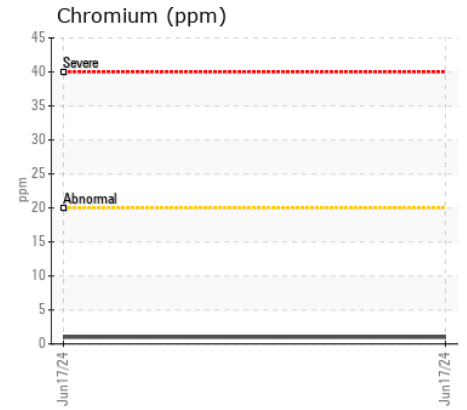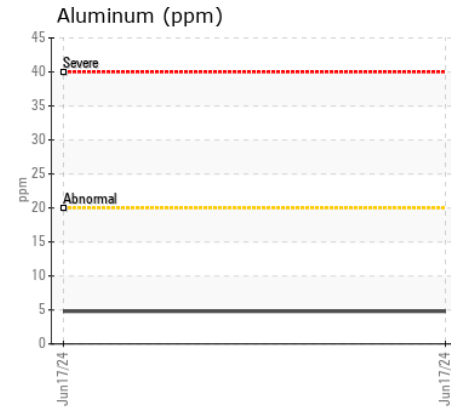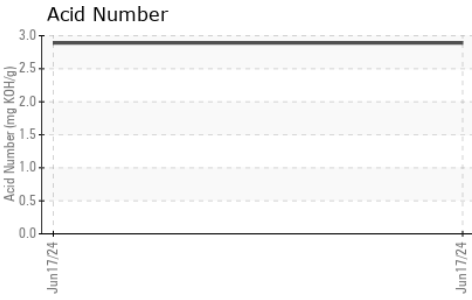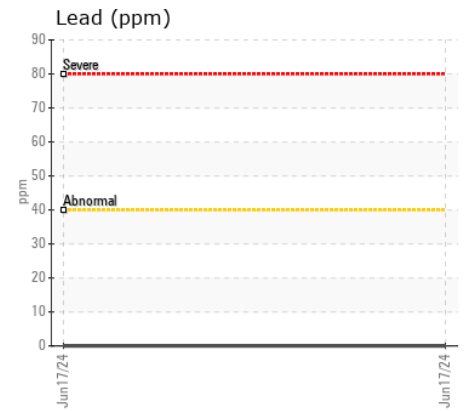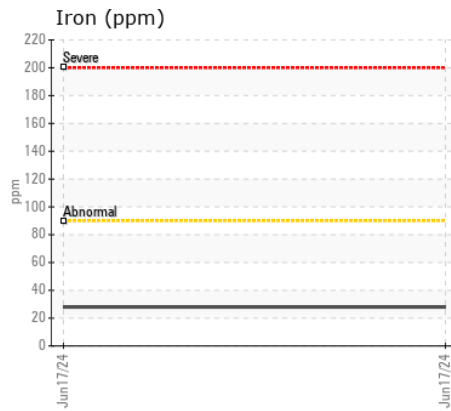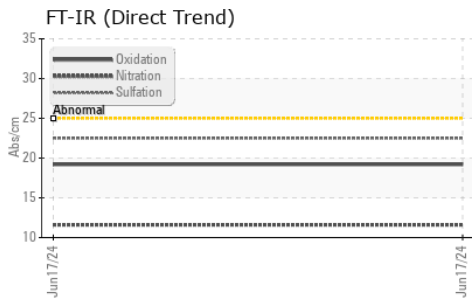

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : OF0000723 **Received** : 26 Jun 2024
Lab Number : **02644122** **Tested** : 26 Jun 2024
Unique Number : 5801661 **Diagnosed** : 27 Jun 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: KV40, TAN Auto, VI)

Oil Filtration Solutions Ltd.
 PO BOX 16125
 CONCEPTION BAY SOUTH, NL
 CA A1X 2E2
 Contact: BILL BUTLER
 BBUTLER@OILFILTRATIONSOLUTIONS.COM
 T: (709)834-8433
 F: (709)834-8435

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.