



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(351146)
Machine Id
LIEBHERR A918 131283-1508
Component
Diesel Engine
Fluid
PETRO CANADA 10W40 (22 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0286692	LH0277527	LH0274421
Sample Date		Client Info		23 Jun 2024	24 Nov 2023	18 Aug 2023
Machine Age	hrs	Client Info		3983	3974	2990
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	14	13	13
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	1	1	1
Lead	ppm	ASTM D5185(m)	>30	0	<1	0
Copper	ppm	ASTM D5185(m)	>125	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	6	5	7
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	8.4	6.3	6.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.2	18.7	19.9
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>20	4	2	2
Boron	ppm	ASTM D5185(m)		38	2	2
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		59	59	59
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)		1129	978	1013
Calcium	ppm	ASTM D5185(m)		849	1064	1071
Phosphorus	ppm	ASTM D5185(m)		989	1005	1087
Zinc	ppm	ASTM D5185(m)		1203	1185	1240
Sulfur	ppm	ASTM D5185(m)		2692	2469	2607
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.0	14.6	14.6
Visc @ 100°C	cSt	ASTM D7279(m)		11.9	12.1	13.6

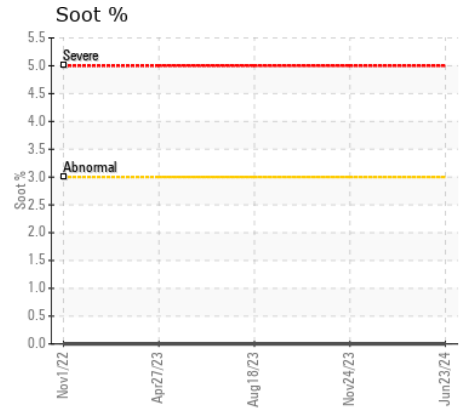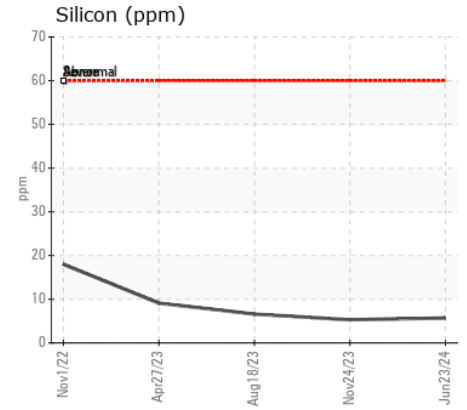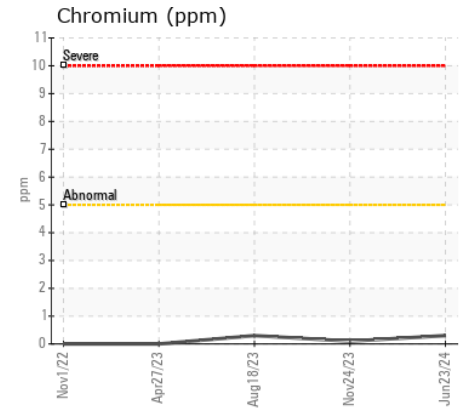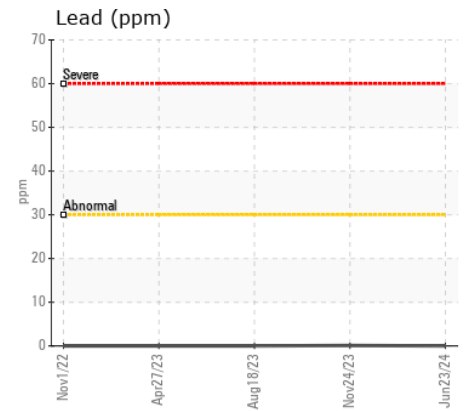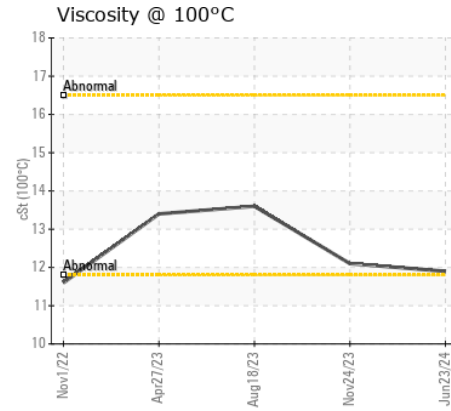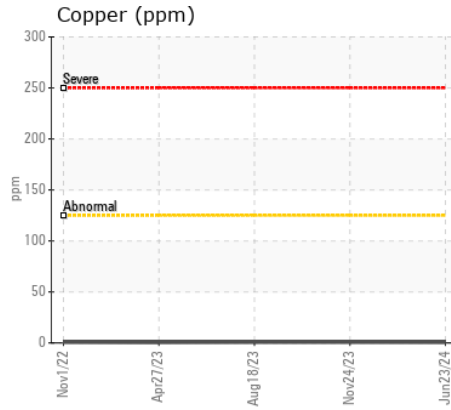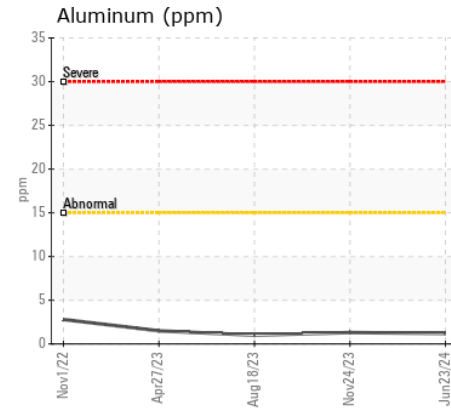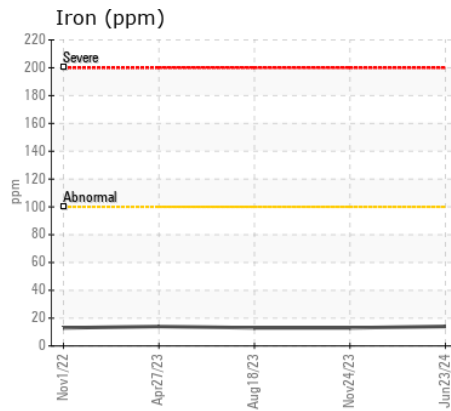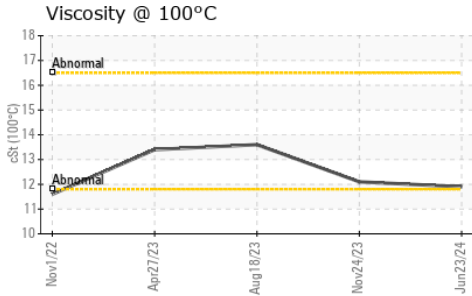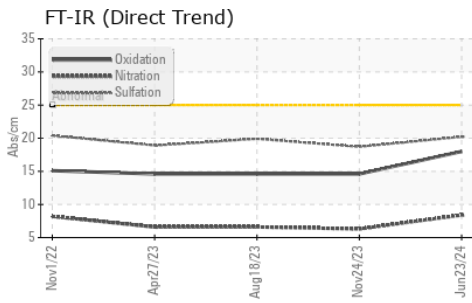

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0286692
Lab Number : 02644136
Unique Number : 5801675
Test Package : MOB 1 (Additional Tests: Visual)

THOMAS CAVANAGH CONSTRUCTION LTD
 RR # 2, 9094 CAVANAGH ROAD
 ASHTON, ON
 CA K0A 1B0
 Contact: Keith

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (613)257-4995
 F: (613)253-0071