



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[25160]

Machine Id
RT-22

Component
Transmission (Auto)

Fluid
CASTROL TRANSYND (--- GAL)

RECOMMENDATION

We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0941353	WC0876518	WC0817992
Sample Date		Client Info		24 Jun 2024	20 Nov 2023	20 Jul 2023
Machine Age	kms	Client Info		73082	65660	56717
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

Tin ppm levels are abnormal. Bearing wear is indicated.

Iron	ppm	ASTM D5185(m)	>230	104	106	91
Chromium	ppm	ASTM D5185(m)	>2	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	1	1	1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>65	41	41	37
Lead	ppm	ASTM D5185(m)	>55	8	9	7
Copper	ppm	ASTM D5185(m)	>85	14	12	8
Tin	ppm	ASTM D5185(m)	>5	▲ 6	▲ 6	▲ 6
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185(m)	>20	8	9	8
Potassium	ppm	ASTM D5185(m)	>20	4	3	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	VLITE	VLITE
Debris	scalar	Visual*	NONE	VLITE	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION


The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		9	9	8
Boron	ppm	ASTM D5185(m)	150	66	67	72
Barium	ppm	ASTM D5185(m)	0	1	1	1
Molybdenum	ppm	ASTM D5185(m)	0	<1	<1	1
Manganese	ppm	ASTM D5185(m)		3	3	3
Magnesium	ppm	ASTM D5185(m)	0	1	2	1
Calcium	ppm	ASTM D5185(m)	40	63	71	73
Phosphorus	ppm	ASTM D5185(m)	320	239	244	271
Zinc	ppm	ASTM D5185(m)	5	10	13	12
Sulfur	ppm	ASTM D5185(m)	1050	871	919	1012
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	34.0	33.3	33.9


▲ Non-ferrous Metals

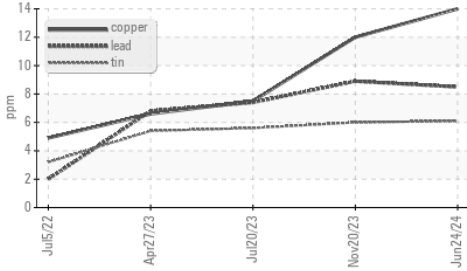


Viscosity @ 40°C

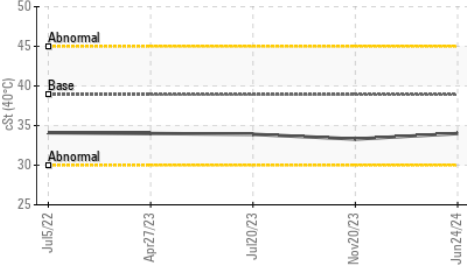


Iron (ppm)

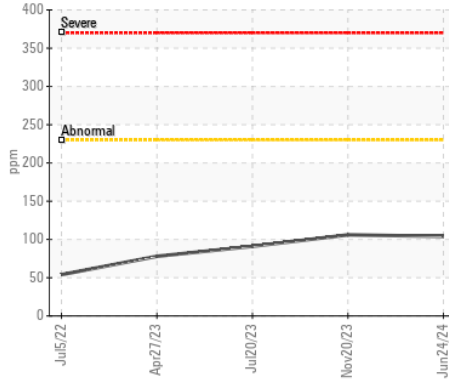


Lead (ppm)

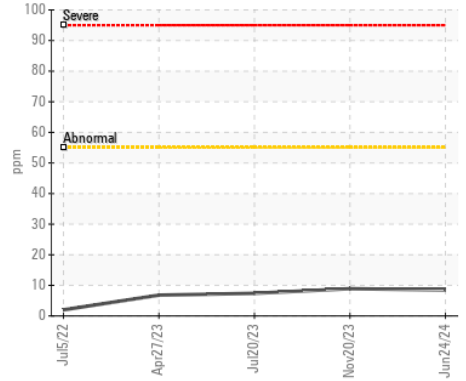


Aluminum (ppm)

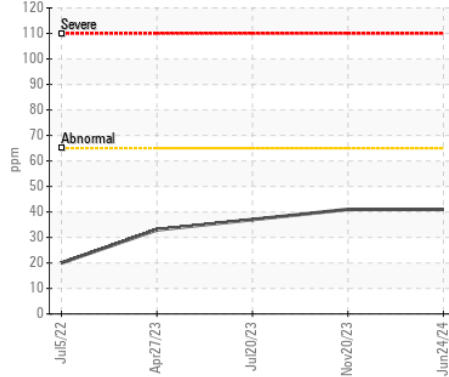


Chromium (ppm)

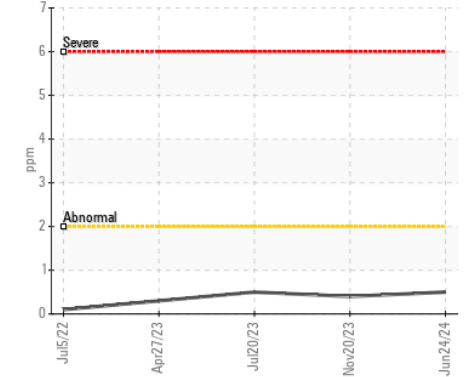


Copper (ppm)

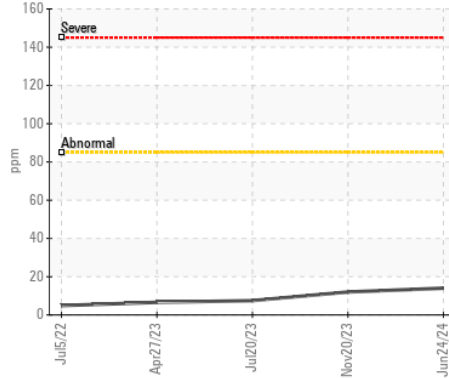


Silicon (ppm)

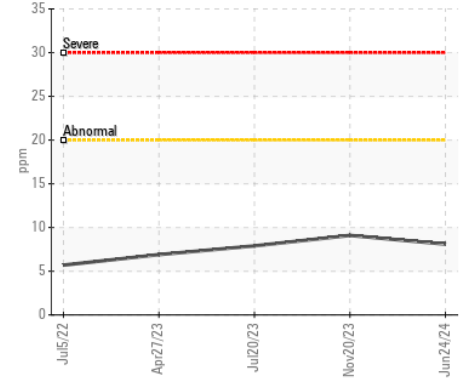

Viscosity @ 40°C

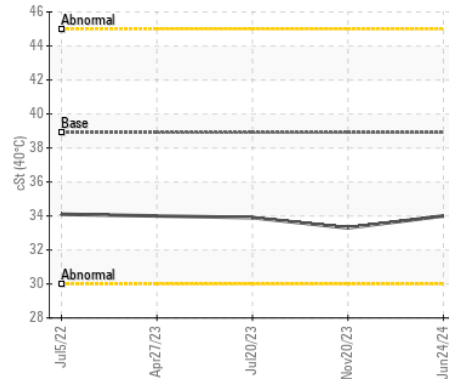

Additives

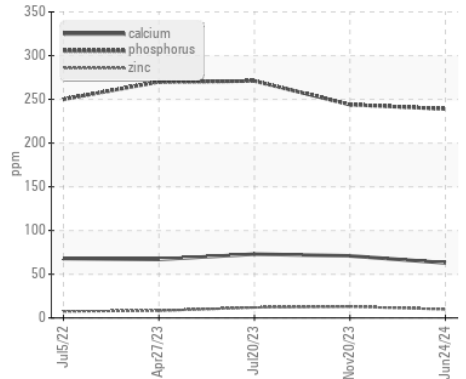

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : WC0941353

Lab Number : 02644191

Unique Number : 5801730

Test Package : MOB 1

Received : 26 Jun 2024

Tested : 26 Jun 2024

Diagnosed : 27 Jun 2024 - Kevin Marson

OX FLEET CARE

466 HIGHWAY 52

DUNDAS, ON

CA L9H 5E2

Contact: Robert Hughes

robert.hughes@ox-equipment.com

T: (289)683-6037

F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.