



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR HS895 188244
Component
Front Left Swing Drive
Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289535	LH0082463	LH0074641
Sample Date		Client Info		10 May 2024	06 Jun 2014	23 Aug 2013
Machine Age	hrs	Client Info		21278	3692	1957
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>400	23	48	59
Chromium	ppm	ASTM D5185(m)	>10	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>10	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>50	<1	0	0
Copper	ppm	ASTM D5185(m)	>200	32	<1	<1
Tin	ppm	ASTM D5185(m)	>10	2	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	1	2	2
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	<1	0
Boron	ppm	ASTM D5185(m)	328	282	334	259
Barium	ppm	ASTM D5185(m)	1	0	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	1	2	<1	1
Calcium	ppm	ASTM D5185(m)	7	16	20	17
Phosphorus	ppm	ASTM D5185(m)	1145	1158	1292	1426
Zinc	ppm	ASTM D5185(m)	3	18	11	17
Sulfur	ppm	ASTM D5185(m)	17909	19702	23325	26564
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	98.0	89.5	85.6

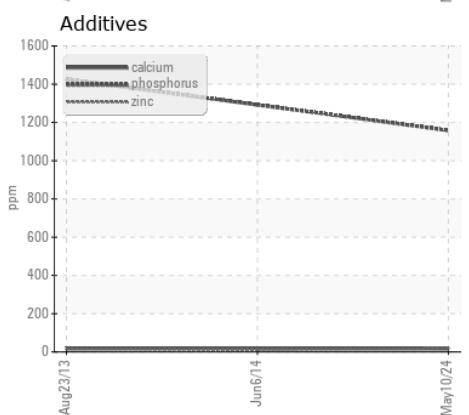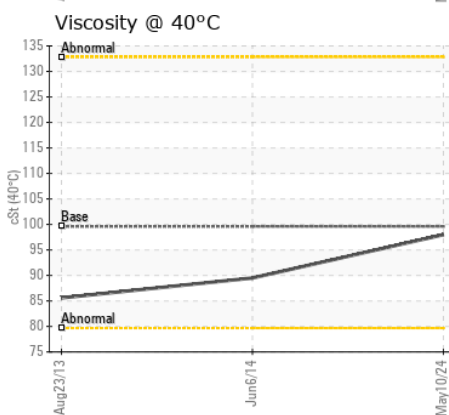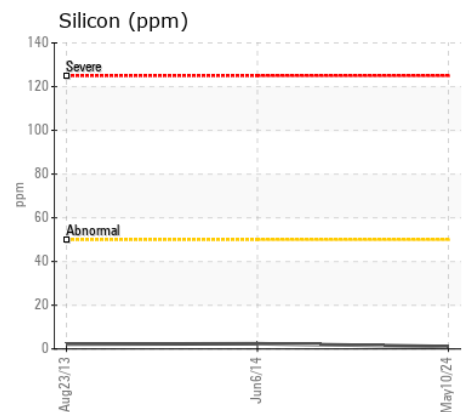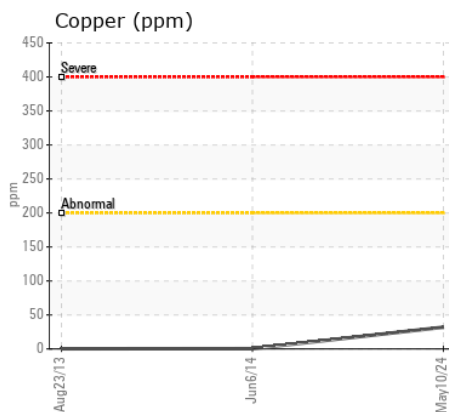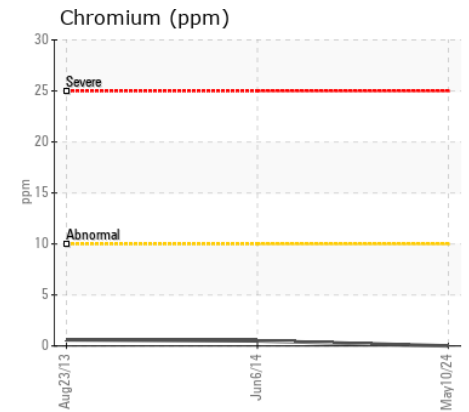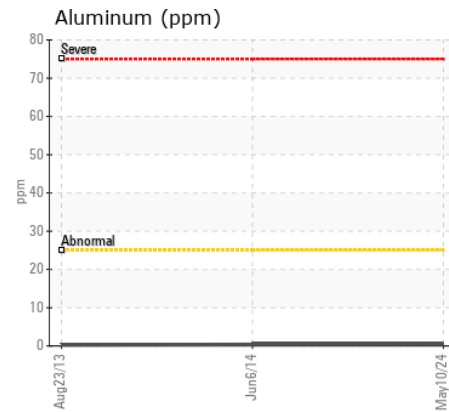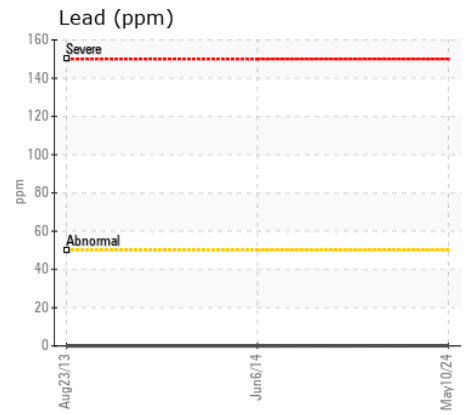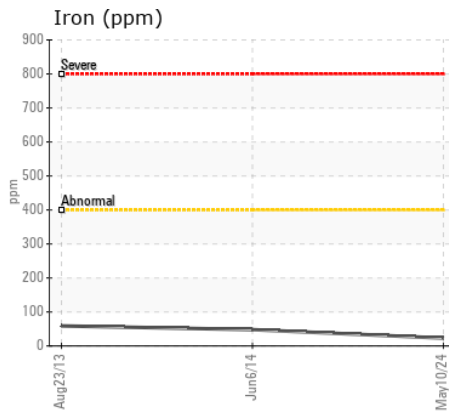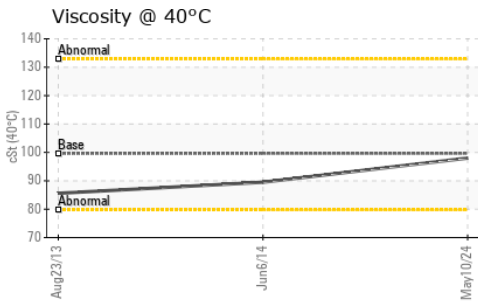

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0289535 **Received** : 26 Jun 2024
Lab Number : 02644207 **Tested** : 26 Jun 2024
Unique Number : 5801746 **Diagnosed** : 26 Jun 2024 - Wes Davis
Test Package : MOB 1

HIGGS & HIGGS
 RR # 4
 ST THOMAS, ON
 CA N5P 3S8
 Contact: Bernie Higgs

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (519)631-4095
 F: (519)631-2745