



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
054897-1650

Component
Splitter Box

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0292452	LH0243061	---
Sample Date		Client Info		18 Jun 2024	17 Jan 2023	---
Machine Age	hrs	Client Info		1937	641	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	29	49	---
Chromium	ppm	ASTM D5185(m)	>5	0	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		<1	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	1	---
Lead	ppm	ASTM D5185(m)	>30	0	<1	---
Copper	ppm	ASTM D5185(m)	>20	2	1	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	13	4	---
Potassium	ppm	ASTM D5185(m)	>20	6	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	3	4	---
Boron	ppm	ASTM D5185(m)	328	3	2	---
Barium	ppm	ASTM D5185(m)	1	<1	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		<1	1	---
Magnesium	ppm	ASTM D5185(m)	1	4	2	---
Calcium	ppm	ASTM D5185(m)	7	9	10	---
Phosphorus	ppm	ASTM D5185(m)	1145	2083	1625	---
Zinc	ppm	ASTM D5185(m)	3	26	22	---
Sulfur	ppm	ASTM D5185(m)	17909	23897	24811	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	179	194	---

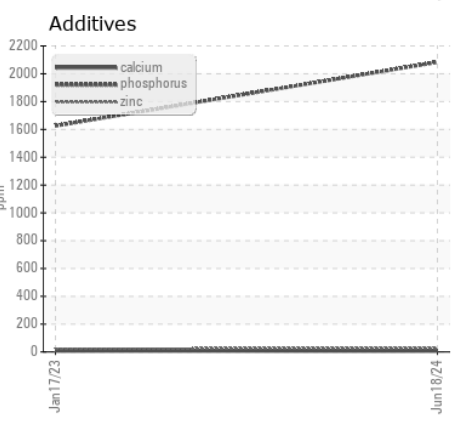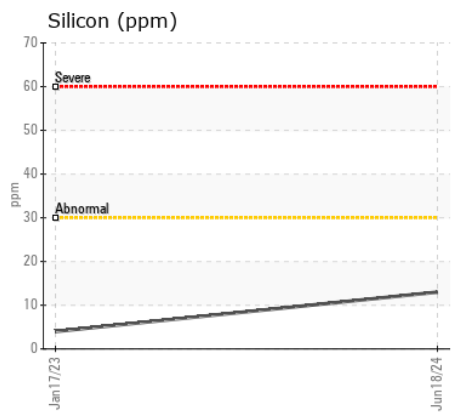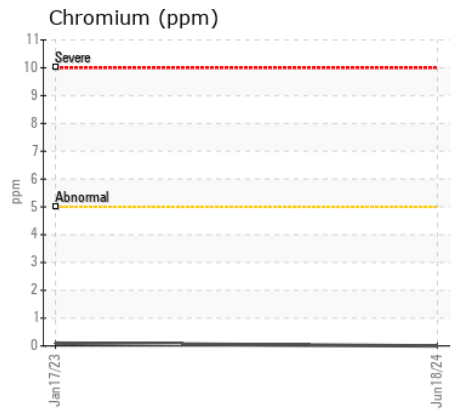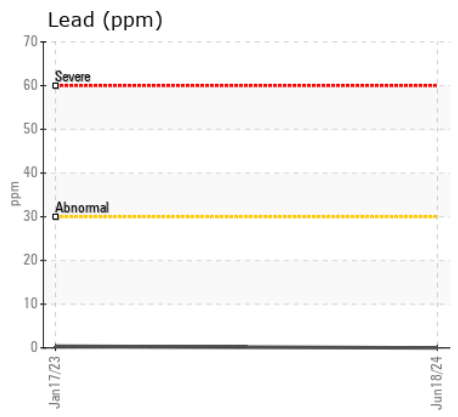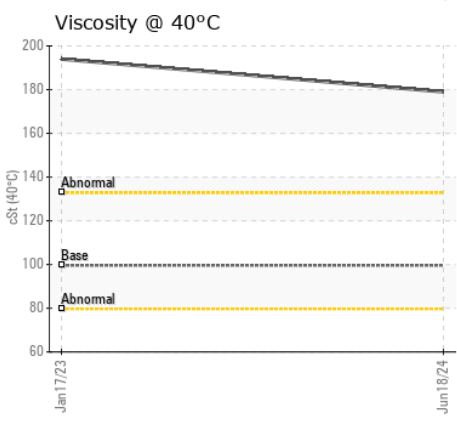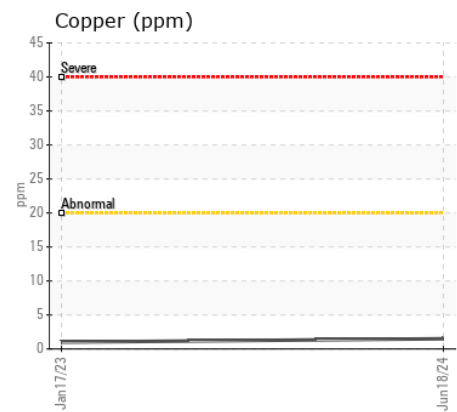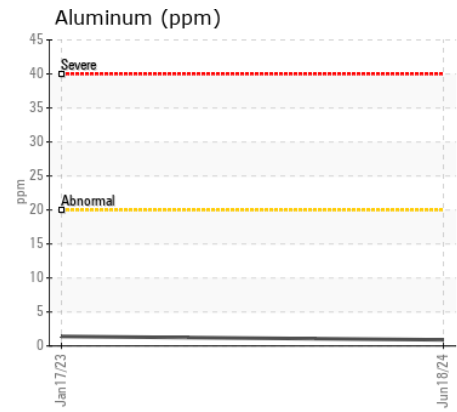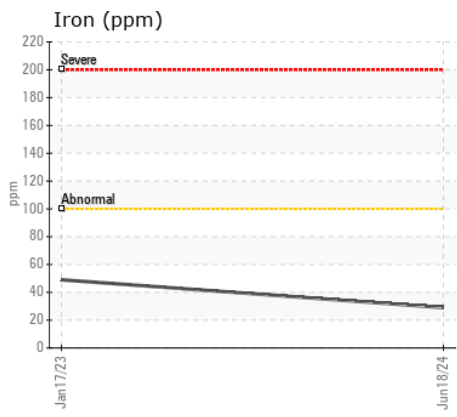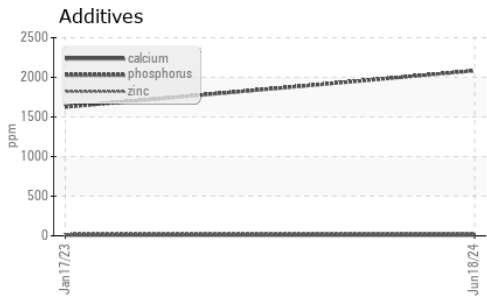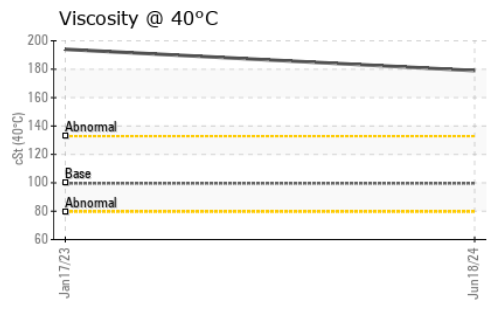

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0292452 **Received** : 26 Jun 2024
Lab Number : 02644211 **Tested** : 26 Jun 2024
Unique Number : 5801750 **Diagnosed** : 26 Jun 2024 - Wes Davis
Test Package : MOB 1

Delsan - American Iron and Metal
 2187 Montee Masson
 Laval, QC
 CA H7B 0A6
 Contact: MANNY MARQUES
 mmarques@delsan-aim.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.