

Machine Id
5017
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084306	PC0084370	PC0082932
Sample Date		Client Info		26 Jun 2024	26 Feb 2024	21 Nov 2023
Machine Age	hrs	Client Info		22315	21795	21335
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	17	16	17
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	2	2
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	5	4
Potassium	ppm	ASTM D5185(m)	>20	0	<1	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.1	0.2
Nitration	Abs/cm	ASTM D7624*	>20	8.8	8.3	7.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.7	18.9	18.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	1	1	2
Boron	ppm	ASTM D5185(m)	250	1	1	2
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	59	58	58
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)	450	955	959	951
Calcium	ppm	ASTM D5185(m)	3000	1048	1133	1093
Phosphorus	ppm	ASTM D5185(m)	1150	1003	1051	1006
Zinc	ppm	ASTM D5185(m)	1350	1202	1216	1202
Sulfur	ppm	ASTM D5185(m)	4250	2587	2806	2557
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.7	15.5	14.0
Visc @ 40°C	cSt	ASTM D7279(m)	115	100	97.7	97.0
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.5	14.4	14.5
Viscosity Index (VI)	Scale	ASTM D2270*	126	149	152	154

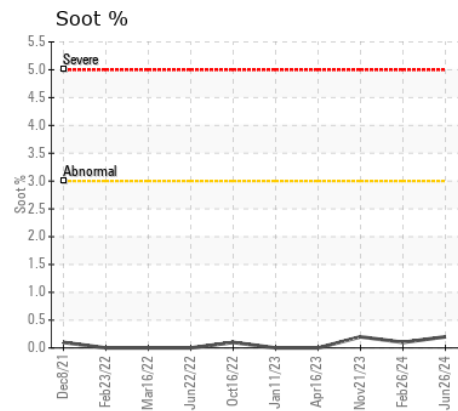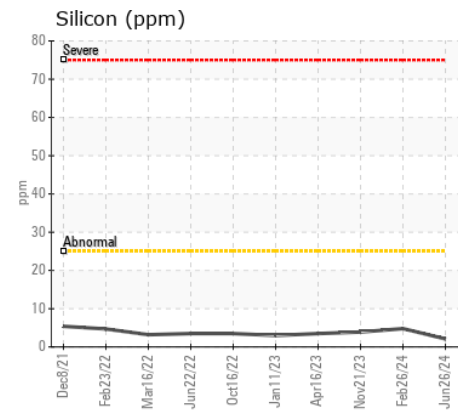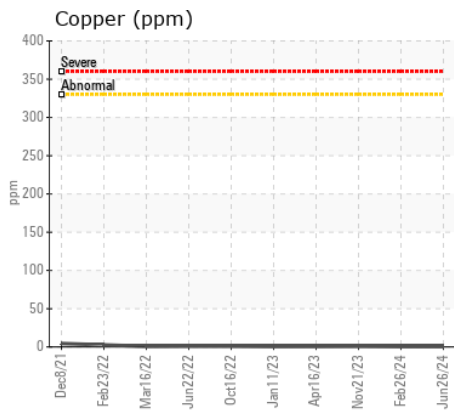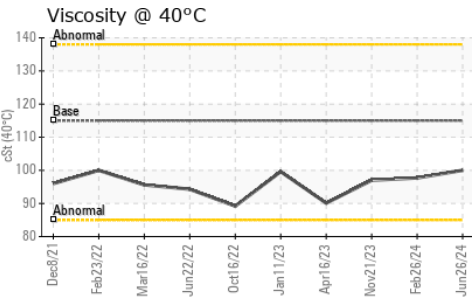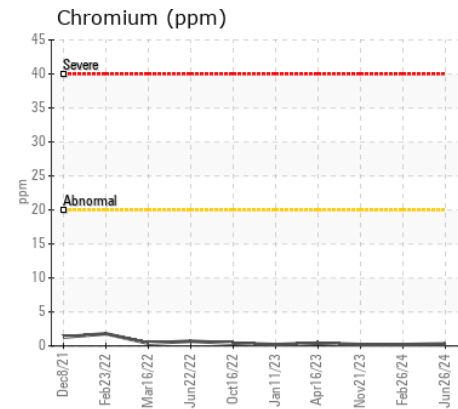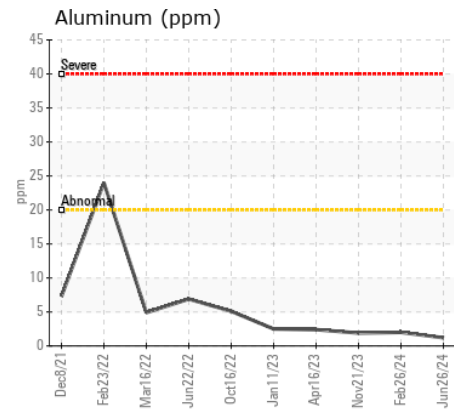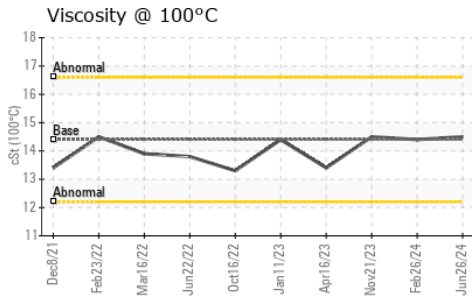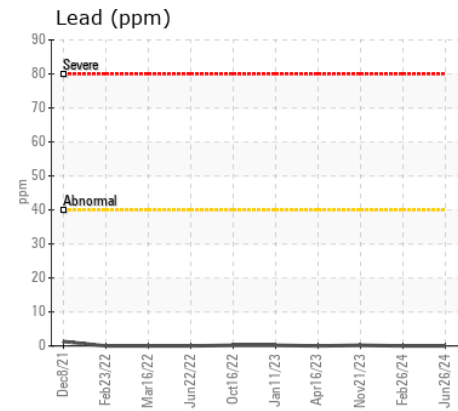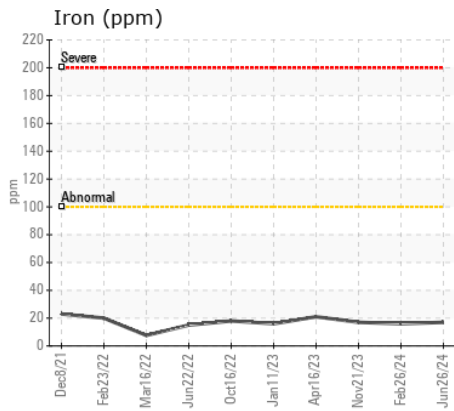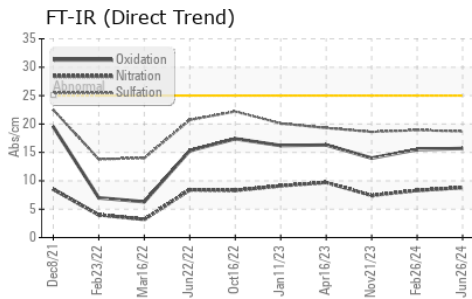

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0084306
Lab Number : 02644316
Unique Number : 5801855
Test Package : MOB 1 (Additional Tests: KV40, VI)
Received : 27 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 27 Jun 2024 - Wes Davis

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.