



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR L580 071613-1760**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA SUPREME 5W30 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0292408</b>	LH0284819	LH0277096
Sample Date		Client Info		<b>22 Jun 2024</b>	12 Feb 2024	14 Oct 2023
Machine Age	hrs	Client Info		<b>2202</b>	1640	1054
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>5</b>	5	6
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>1</b>	1	1
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>125	<b>2</b>	2	4
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	<b>6</b>	6	8
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.0</b>	8.9	9.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.7</b>	20.2	22.8
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>4</b>	5	4
Boron	ppm	ASTM D5185(m)	186	<b>35</b>	35	38
Barium	ppm	ASTM D5185(m)	<1	<b>&lt;1</b>	<1	3
Molybdenum	ppm	ASTM D5185(m)	79	<b>57</b>	57	58
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m)	578	<b>1128</b>	1083	1098
Calcium	ppm	ASTM D5185(m)	1002	<b>836</b>	826	892
Phosphorus	ppm	ASTM D5185(m)	745	<b>1002</b>	1002	970
Zinc	ppm	ASTM D5185(m)	837	<b>1215</b>	1159	1152
Sulfur	ppm	ASTM D5185(m)	2502	<b>2811</b>	2909	2672
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>18.7</b>	19.2	23.0
Visc @ 100°C	cSt	ASTM D7279(m)	11.42	<b>11.5</b>	11.6	11.6

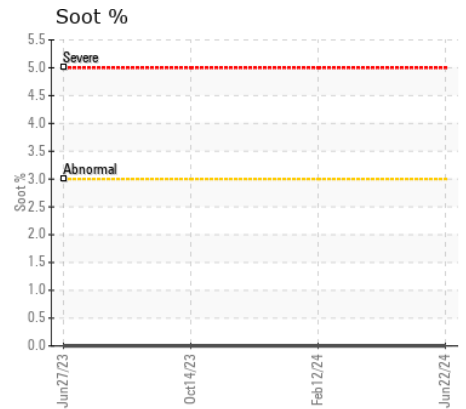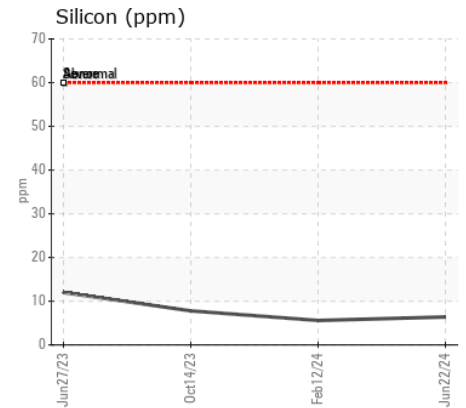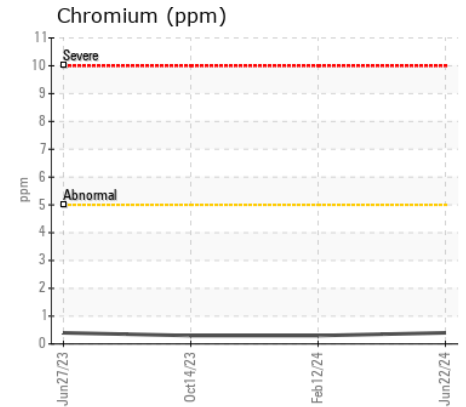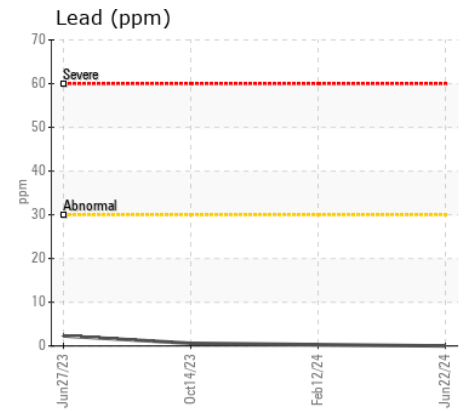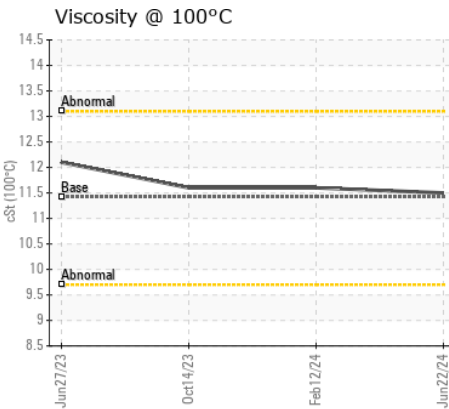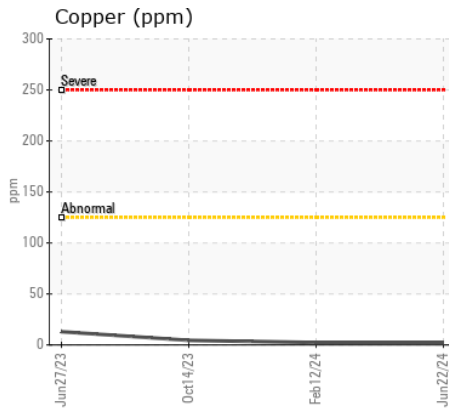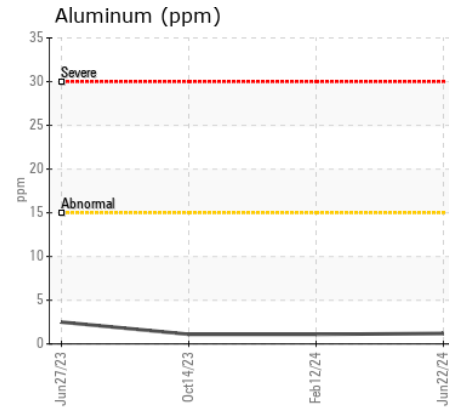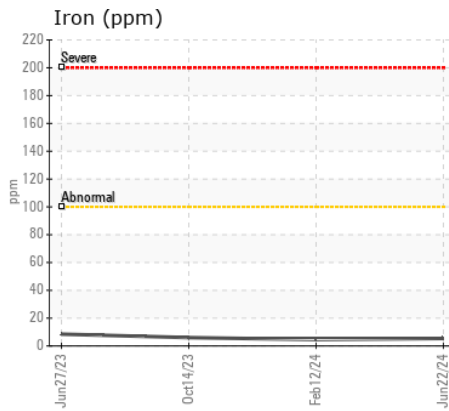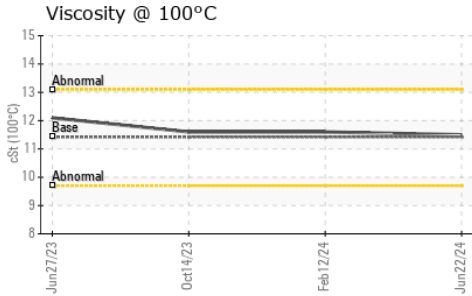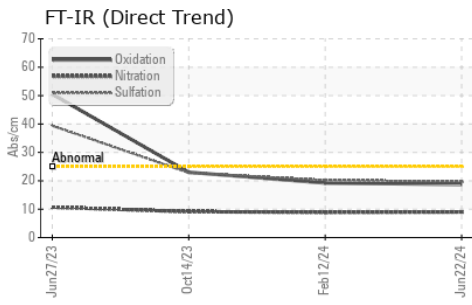

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0292408  
**Lab Number** : 02644500  
**Unique Number** : 5802039  
**Test Package** : MOB 1  
**Received** : 28 Jun 2024  
**Tested** : 28 Jun 2024  
**Diagnosed** : 28 Jun 2024 - Wes Davis

**BIRCH HILL CONSTRUCTION**  
 11 MCELROY ST.  
 MONCTON, NB  
 CA E1C 9T2  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: