



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**Locomotives**

Machine Id

**2001**

Component

**Railway diesel**

Fluid

**RAILWAY ENGINE OIL SAE 40 (11 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes BN to determine the suitability of the oil for continued use.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0938517</b>	WC0938527	WC0938529
Sample Date		Client Info		<b>19 Jun 2024</b>	10 Jun 2024	04 Jun 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>42	<b>16</b>	17	16
Chromium	ppm	ASTM D5185(m)	>6	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>4	<b>3</b>	3	3
Lead	ppm	ASTM D5185(m)	>30	<b>2</b>	2	2
Copper	ppm	ASTM D5185(m)	>95	<b>10</b>	10	9
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>22	<b>4</b>	4	5
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*		<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.3</b>	12.2	12.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>14.6</b>	14.8	14.6
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service (unconfirmed).

Sodium	ppm	ASTM D5185(m)		<b>9</b>	9	9
Boron	ppm	ASTM D5185(m)	10	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	25	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	20	<b>16</b>	17	16
Calcium	ppm	ASTM D5185(m)	4500	<b>4587</b>	4593	4716
Phosphorus	ppm	ASTM D5185(m)	10	<b>4</b>	3	4
Zinc	ppm	ASTM D5185(m)	10	<b>4</b>	5	5
Sulfur	ppm	ASTM D5185(m)	5000	<b>2869</b>	2900	2916
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>9.8</b>	9.4	9.3
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.9</b>	14.9	15.0

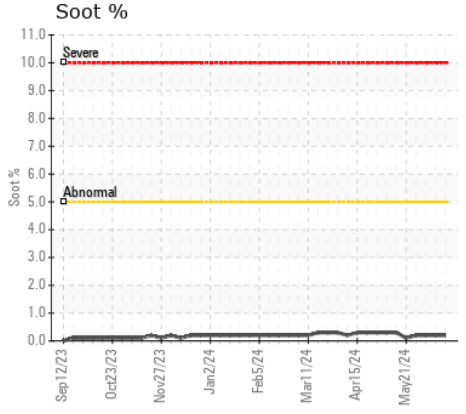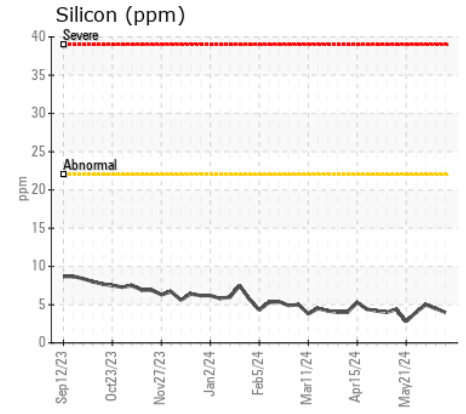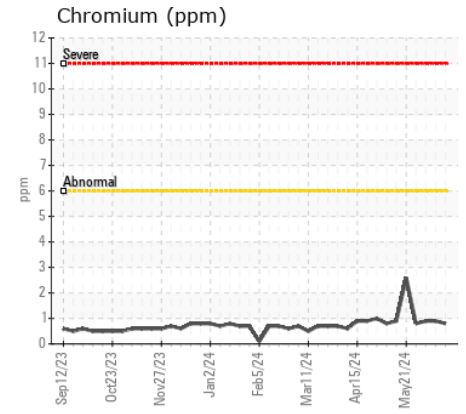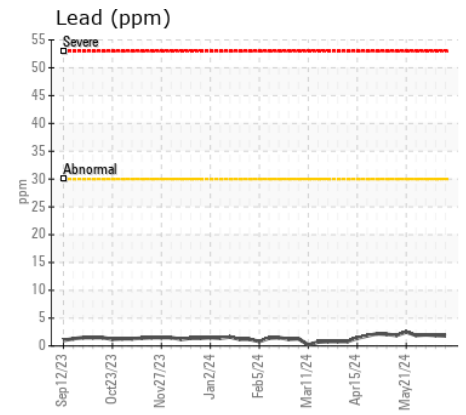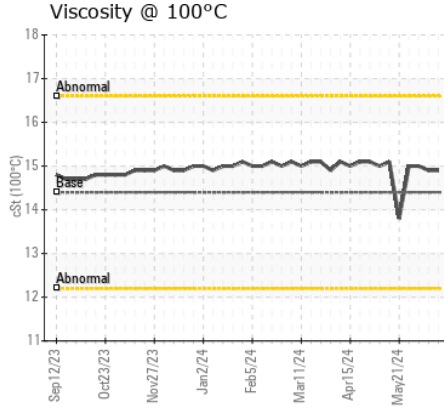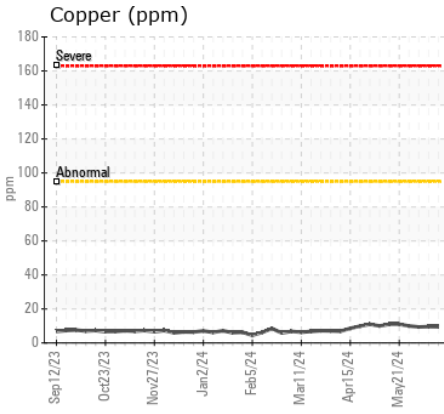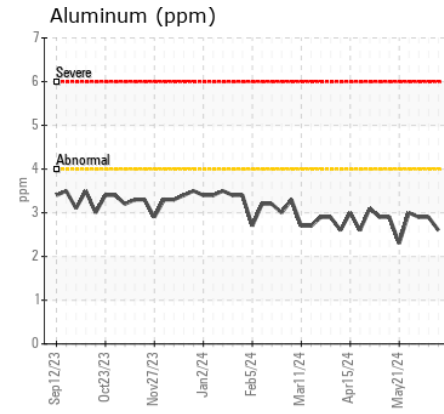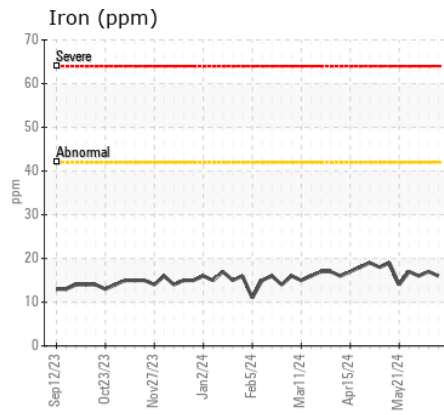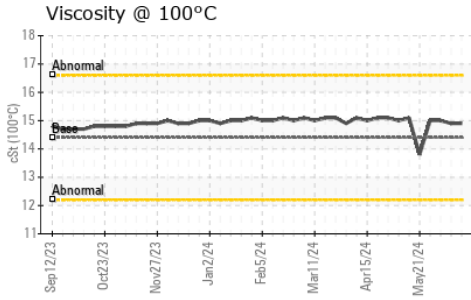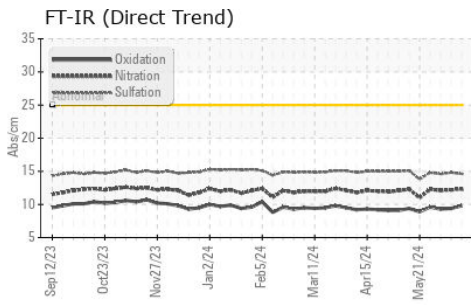

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0938517  
**Lab Number** : 02644565  
**Unique Number** : 5802104  
**Test Package** : MOB 1

**Received** : 28 Jun 2024  
**Tested** : 28 Jun 2024  
**Diagnosed** : 28 Jun 2024 - Wes Davis

**Vale - Transportation (Mobile Equipment)**  
 Transportation Department, (Services - Mobile Equipment)  
 COPPER CLIFF, ON  
 CA P0M 1N0

Contact: Richard Rochon  
 richard.rochon@vale.com

T: (705)682-6014  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.