



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH22M 158368-1250
Component
Splitter Box
Fluid
SAE 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0284687	LH0284720	---
Sample Date		Client Info		25 Jun 2024	10 Apr 2024	---
Machine Age	hrs	Client Info		1070	500	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	14	32	---
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	2	4	---
Lead	ppm	ASTM D5185(m)	>30	0	0	---
Copper	ppm	ASTM D5185(m)	>20	12	21	---
Tin	ppm	ASTM D5185(m)	>10	<1	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	3	6	---
Potassium	ppm	ASTM D5185(m)	>20	1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>401	18	35	---
Boron	ppm	ASTM D5185(m)		3	4	---
Barium	ppm	ASTM D5185(m)		<1	1	---
Molybdenum	ppm	ASTM D5185(m)		30	0	---
Manganese	ppm	ASTM D5185(m)		23	59	---
Magnesium	ppm	ASTM D5185(m)		472	9	---
Calcium	ppm	ASTM D5185(m)		2059	3389	---
Phosphorus	ppm	ASTM D5185(m)		1003	1080	---
Zinc	ppm	ASTM D5185(m)		1147	1140	---
Sulfur	ppm	ASTM D5185(m)		4892	6792	---
Visc @ 40°C	cSt	ASTM D7279(m)	90.0	60.0	50.3	---

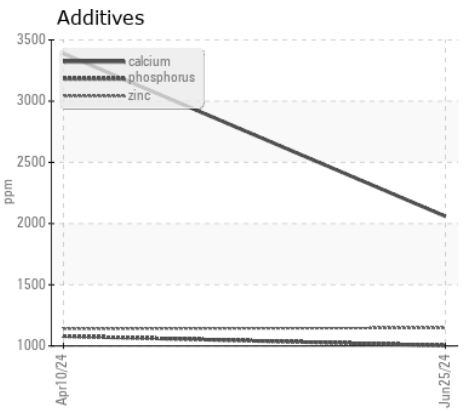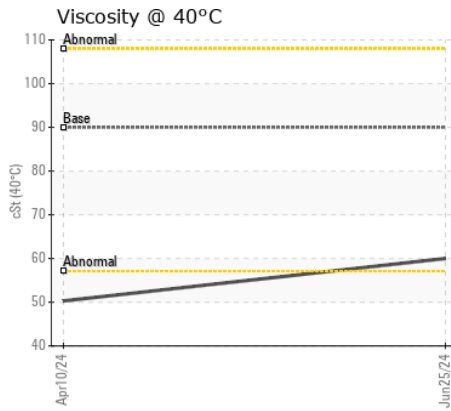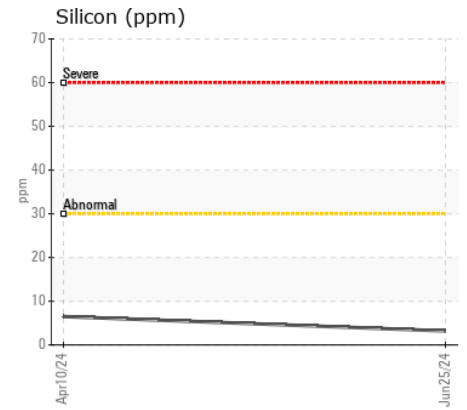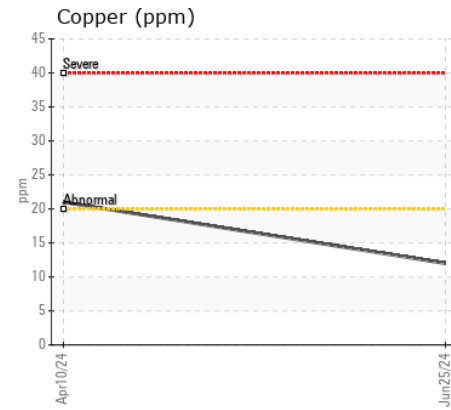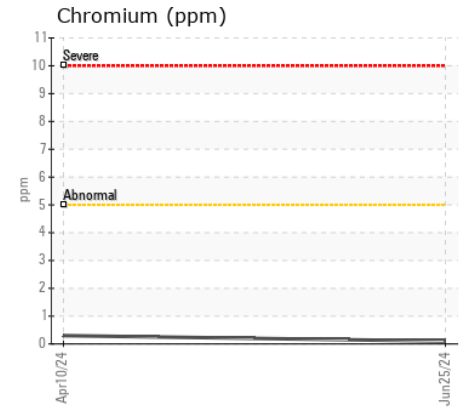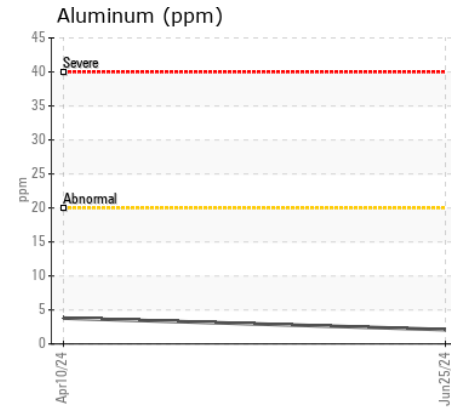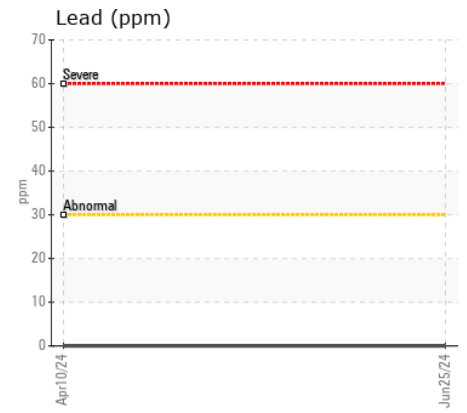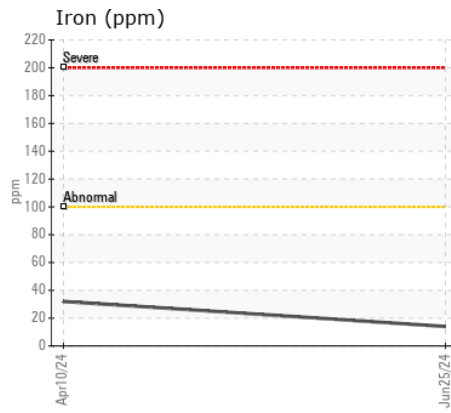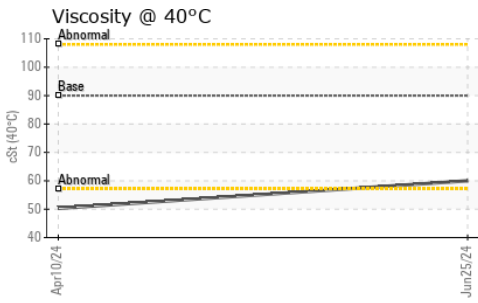

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0284687
Lab Number : 02644667
Unique Number : 5802206
Test Package : MOBCE

BELLEMARE RECYCLAGE - SABLE DES FORGES INC
 8750 BOUL INDUSTRIEL
 TROIS-RIVIERES, QC
 CA G9A 5E1
 Contact: Sacha Bellemare
 sachabellemare@groupebellemare.com
 T: (819)296-3767
 F: (819)296-1116

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.