



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH22M 158368-1250
Component
Rear Right Wheel Hub
Fluid
SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0284692	LH0284725	---
Sample Date		Client Info		25 Jun 2024	10 Apr 2024	---
Machine Age	hrs	Client Info		1070	500	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>650	7	15	---
Chromium	ppm	ASTM D5185(m)	>4	0	0	---
Nickel	ppm	ASTM D5185(m)	>4	<1	0	---
Titanium	ppm	ASTM D5185(m)	>4	0	0	---
Silver	ppm	ASTM D5185(m)		<1	0	---
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	---
Lead	ppm	ASTM D5185(m)	>4	0	0	---
Copper	ppm	ASTM D5185(m)	>60	2	4	---
Tin	ppm	ASTM D5185(m)	>4	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	1	5	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	15	---
Boron	ppm	ASTM D5185(m)	150	237	104	---
Barium	ppm	ASTM D5185(m)	5	<1	1	---
Molybdenum	ppm	ASTM D5185(m)	0	0	0	---
Manganese	ppm	ASTM D5185(m)		<1	5	---
Magnesium	ppm	ASTM D5185(m)	0	4	10	---
Calcium	ppm	ASTM D5185(m)	20	646	3499	---
Phosphorus	ppm	ASTM D5185(m)	1200	1154	1138	---
Zinc	ppm	ASTM D5185(m)	25	288	1406	---
Sulfur	ppm	ASTM D5185(m)	22000	16571	2758	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.5	90.4	65.0	---

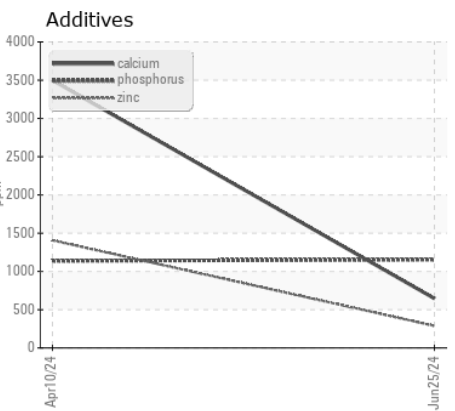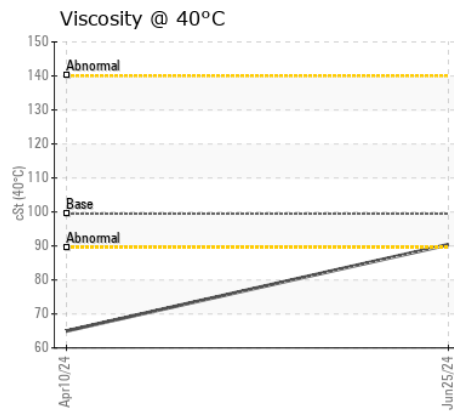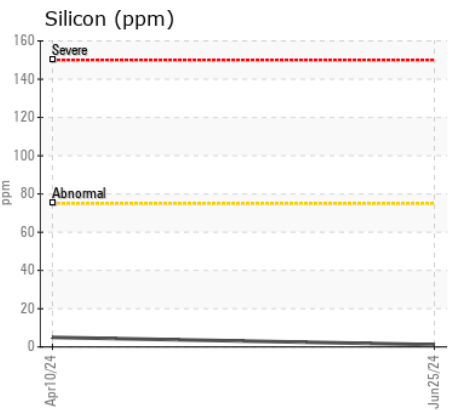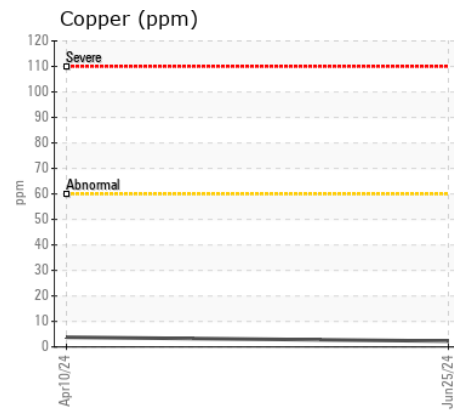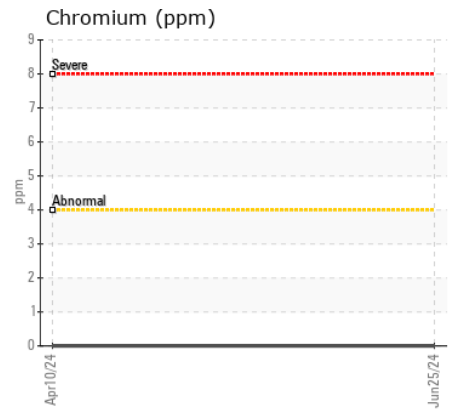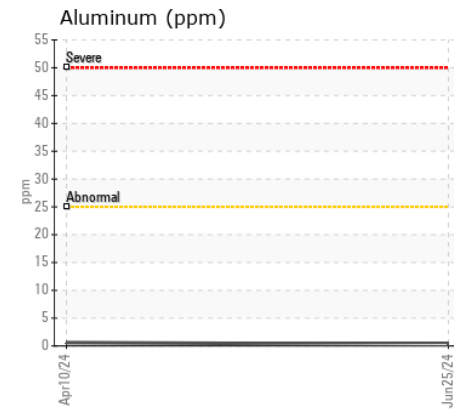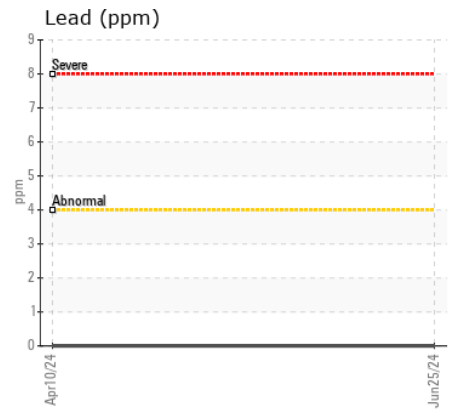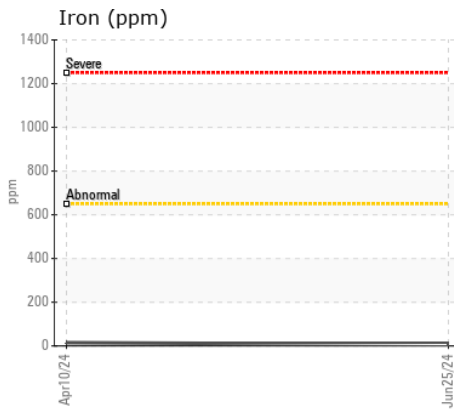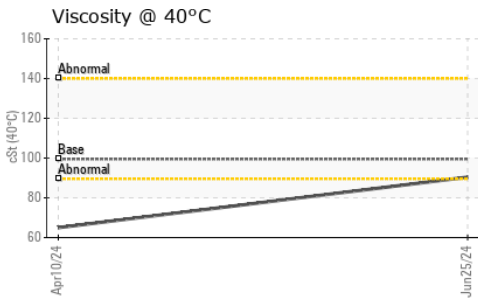

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0284692
Lab Number : 02644684
Unique Number : 5802223
Test Package : MOBCE

BELLEMARE RECYCLAGE - SABLE DES FORGES INC
 8750 BOUL INDUSTRIEL
 TROIS-RIVIERES, QC
 CA G9A 5E1
 Contact: Sacha Bellemare
 sachabellemare@groupebellemare.com
 T: (819)296-3767
 F: (819)296-1116

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.