



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area

**(371127)**

Machine Id

**137622-1216**

Component

**Rear Differential**

Fluid

**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0288387</b>	LH0250751	---
Sample Date		Client Info		<b>07 Jun 2024</b>	09 Mar 2023	---
Machine Age	hrs	Client Info		<b>4549</b>	2000	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>190	<b>4</b>	41	---
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	1	---
Lead	ppm	ASTM D5185(m)	>15	<b>1</b>	0	---
Copper	ppm	ASTM D5185(m)	>70	<b>60</b>	8	---
Tin	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	---
Yellow Metal	scalar	Visual*	NONE	<b>VLITE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>2</b>	7	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	4	---
Boron	ppm	ASTM D5185(m)	328	<b>270</b>	3	---
Barium	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185(m)	1	<b>2</b>	1	---
Calcium	ppm	ASTM D5185(m)	7	<b>16</b>	254	---
Phosphorus	ppm	ASTM D5185(m)	1145	<b>1375</b>	2109	---
Zinc	ppm	ASTM D5185(m)	3	<b>40</b>	138	---
Sulfur	ppm	ASTM D5185(m)	17909	<b>21793</b>	28207	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>107</b>	132	---

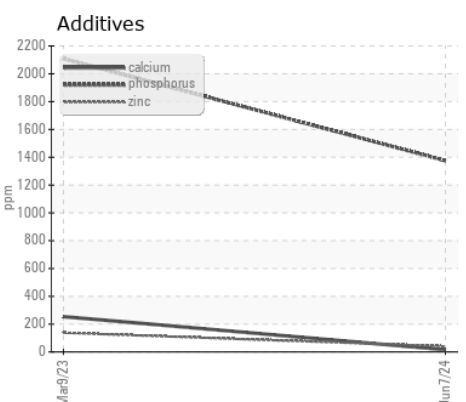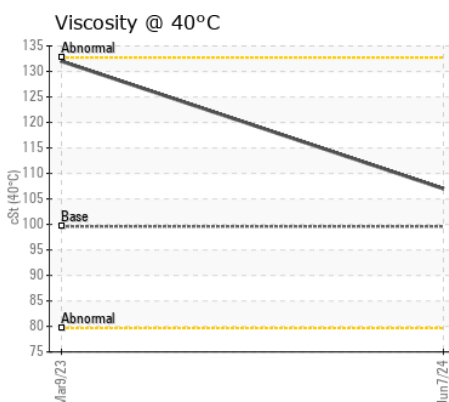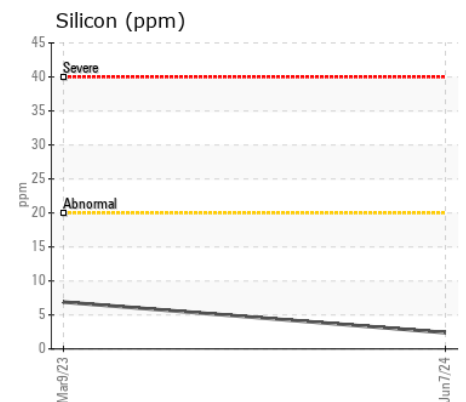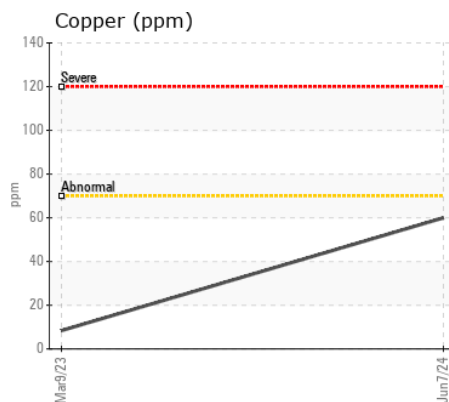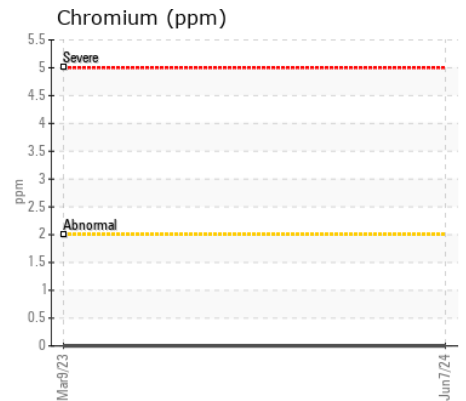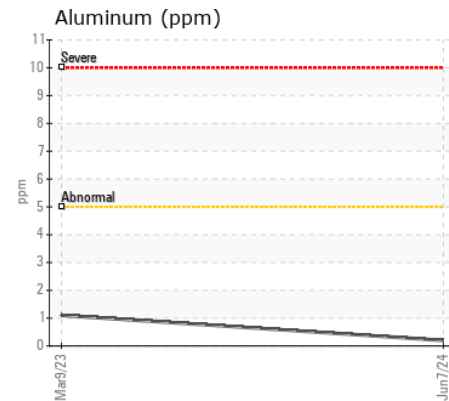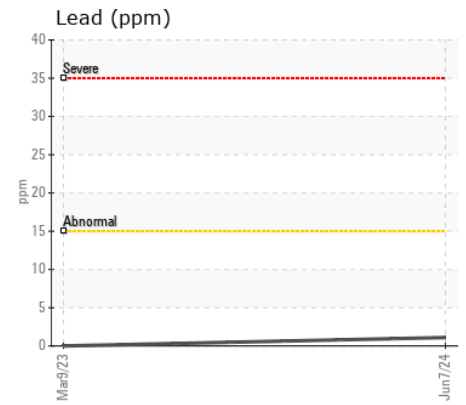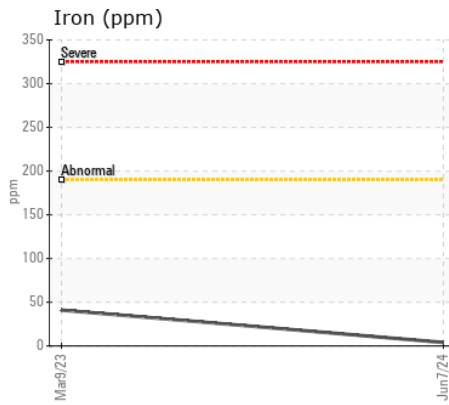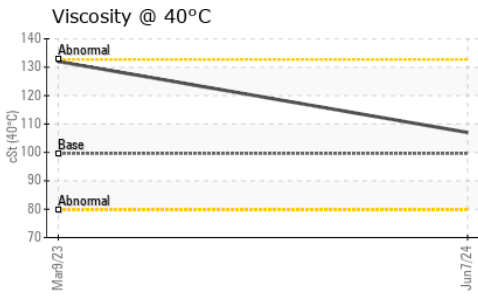

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0288387 **Received** : 28 Jun 2024  
**Lab Number** : 02644689 **Tested** : 28 Jun 2024  
**Unique Number** : 5802228 **Diagnosed** : 28 Jun 2024 - Wes Davis  
**Test Package** : MOB 1

**American Iron and Metal**  
 100 INDUSTRIAL ROAD  
 NORTH BAY, ON  
 CA P1B 8K3  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: