

Machine Id
7775
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0126625	GFL0118289	GFL0111124
Sample Date		Client Info		27 Jun 2024	08 Apr 2024	31 Jan 2024
Machine Age	kms	Client Info		199583	196554	194447
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>165	2	5	11
Chromium	ppm	ASTM D5185(m)	>5	0	0	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	1	1
Lead	ppm	ASTM D5185(m)	>150	0	0	<1
Copper	ppm	ASTM D5185(m)	>90	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>35	2	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	9	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	0.0	NEG
Soot %	%	ASTM D7844*	>7.5	0	0.3	1.3
Nitration	Abs/cm	ASTM D7624*	>20	5.4	6.0	7.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.9	18.9	21.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	14	43
Boron	ppm	ASTM D5185(m)	0	4	4	4
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	57	60	60
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	949	975	961
Calcium	ppm	ASTM D5185(m)	1070	1039	1043	1064
Phosphorus	ppm	ASTM D5185(m)	1150	981	995	1014
Zinc	ppm	ASTM D5185(m)	1270	1197	1163	1179
Sulfur	ppm	ASTM D5185(m)	2060	2595	2556	2715
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.6	13.6	14.7
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.8	13.9	14.5

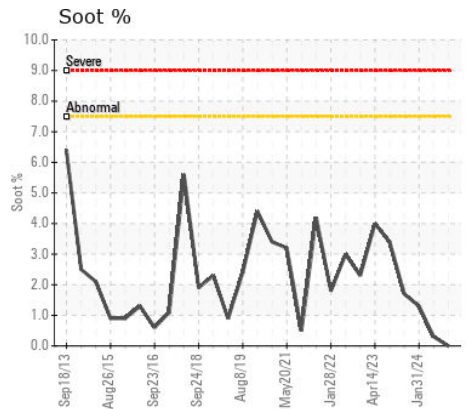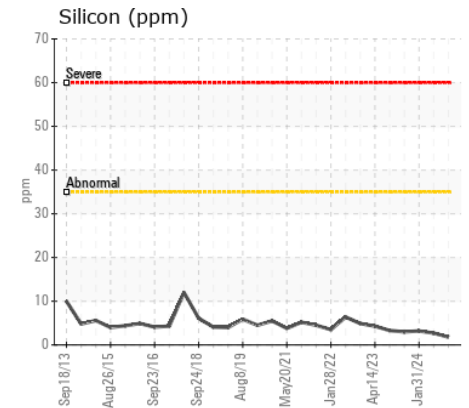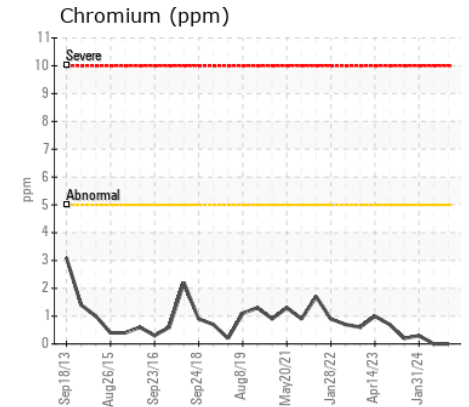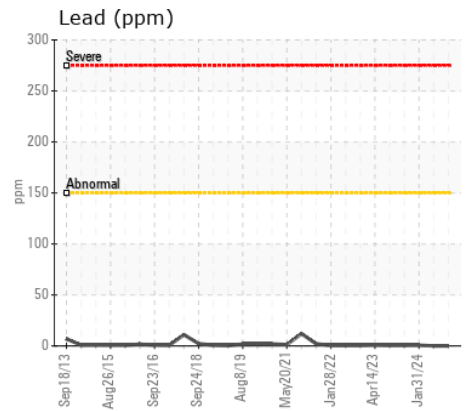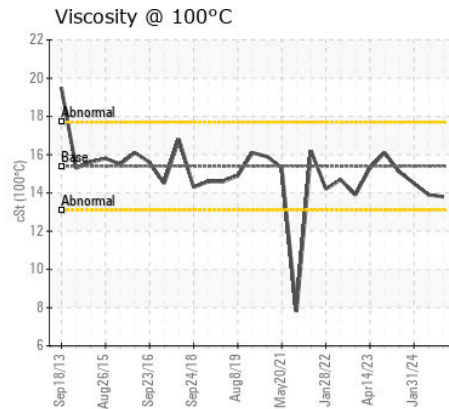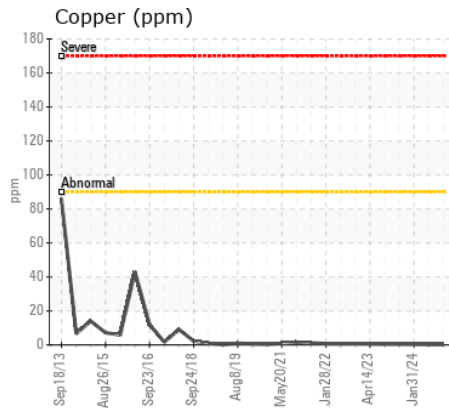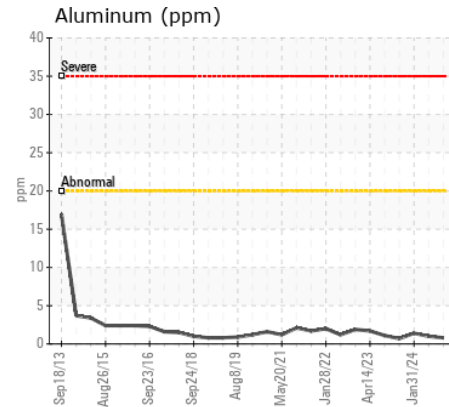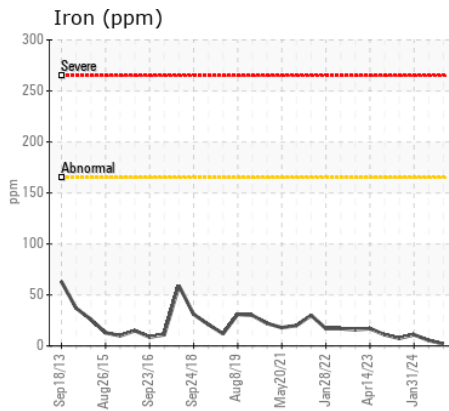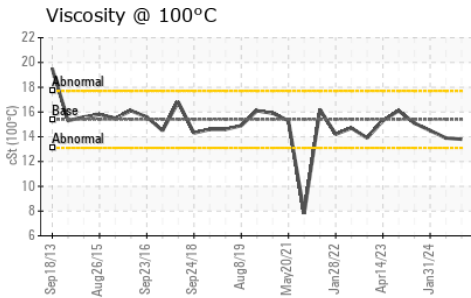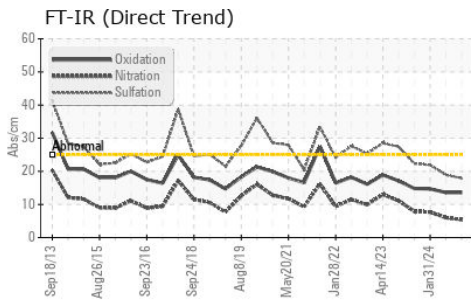

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0126625
Lab Number : 02644740
Unique Number : 5802279
Test Package : MOB 1

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Rick Philip
 rphilip@gflenv.com
 T: (416)745-8080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.