

Machine Id
411018
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0089850	---	---
Sample Date		Client Info		29 May 2024	---	---
Machine Age	hrs	Client Info		6681	---	---
Oil Age	hrs	Client Info		660	---	---
Filter Age	hrs	Client Info		660	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	15	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>15	1	---	---
Titanium	ppm	ASTM D5185(m)	>2	<1	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	5	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	1	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	13	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>4	0.3	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.1	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	LIGHT	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	0	1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	60	58	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1010	978	---	---
Calcium	ppm	ASTM D5185(m)	1070	1040	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	977	---	---
Zinc	ppm	ASTM D5185(m)	1270	1216	---	---
Sulfur	ppm	ASTM D5185(m)	2060	2462	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.9	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	113.9	103	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	142	137	---	---

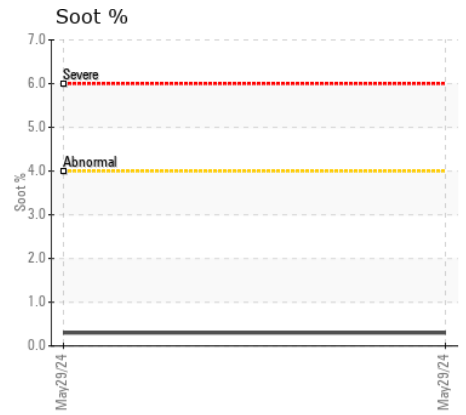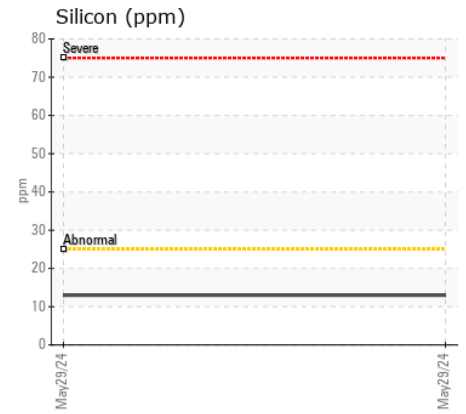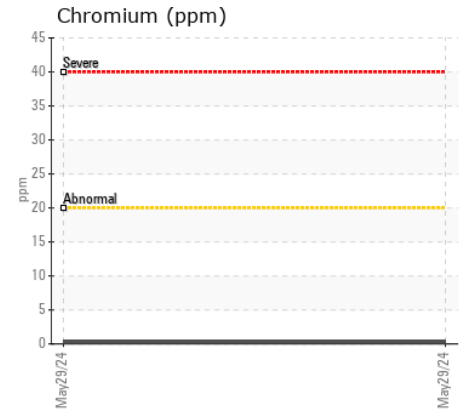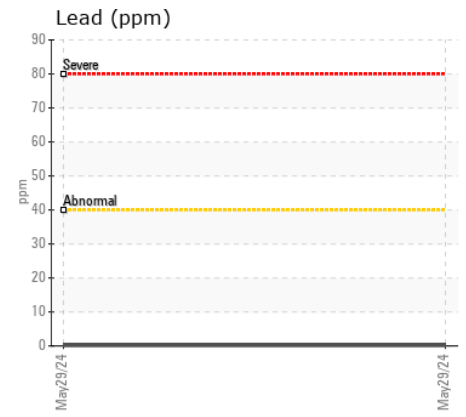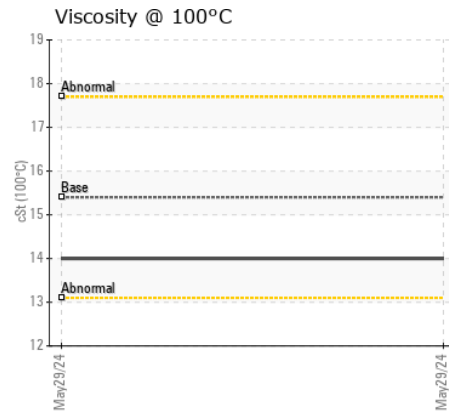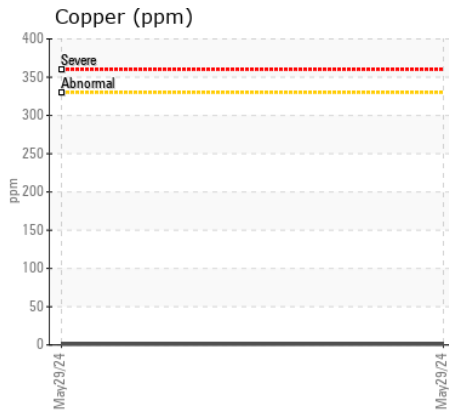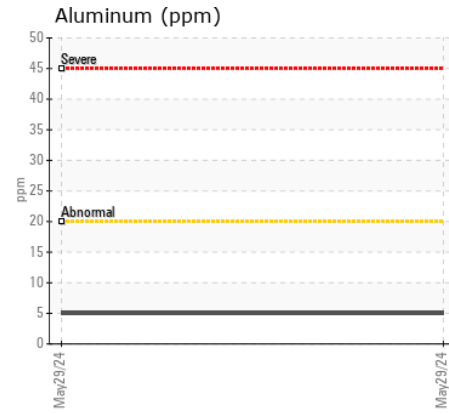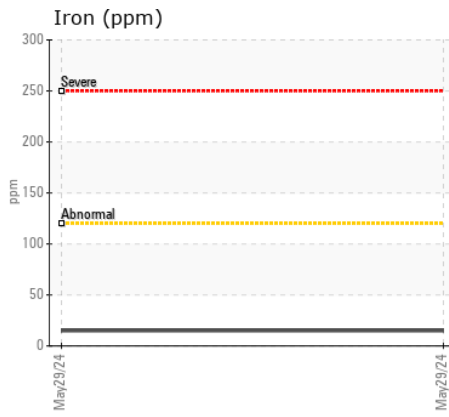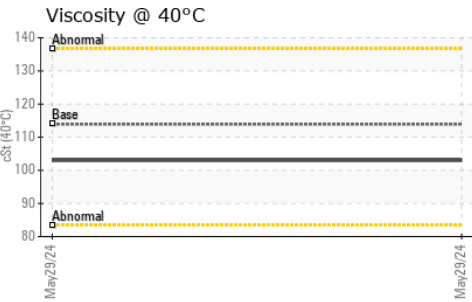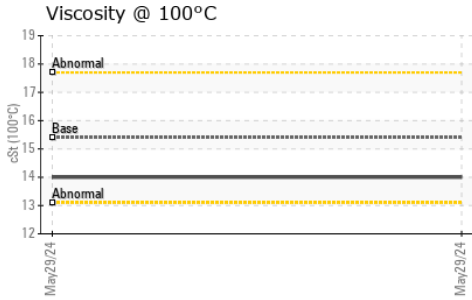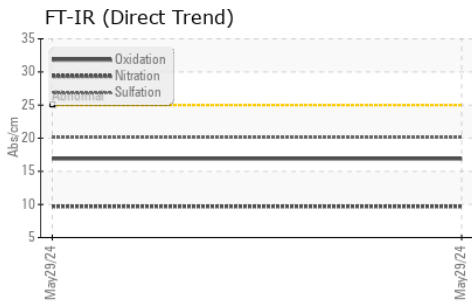

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0089850
Lab Number : 02644787
Unique Number : 5802326
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

GFL Environmental DO NOT USE_USE GFL582
 4624 Cumberland Road
 Cumberland, BC
 CA V0R 1S0
 Contact: Kyle Fallowfield
 kfallowfield@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: