



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ABNORMAL

Machine Id
420012
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0097992	GFL0097978	---
Sample Date		Client Info		12 Jun 2024	23 Feb 2024	---
Machine Age	hrs	Client Info		10189	9572	---
Oil Age	hrs	Client Info		617	339	---
Filter Age	hrs	Client Info		617	339	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	14	8	---
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>2	0	0	---
Silver	ppm	ASTM D5185(m)	>2	0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	2	2	---
Lead	ppm	ASTM D5185(m)	>40	2	<1	---
Copper	ppm	ASTM D5185(m)	>330	<1	<1	---
Tin	ppm	ASTM D5185(m)	>15	<1	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION












There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	2	---
Potassium	ppm	ASTM D5185(m)	>20	4	3	---
Fuel	%	ASTM D7593*	>3.0	▲ 4.2	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>6	0.3	0.1	---
Nitration	Abs/cm	ASTM D7624*	>20	9.3	7.0	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.1	19.7	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		4	3	---
Boron	ppm	ASTM D5185(m)	0	1	1	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	60	57	56	---
Manganese	ppm	ASTM D5185(m)	0	<1	0	---
Magnesium	ppm	ASTM D5185(m)	1010	951	926	---
Calcium	ppm	ASTM D5185(m)	1070	1010	997	---
Phosphorus	ppm	ASTM D5185(m)	1150	962	981	---
Zinc	ppm	ASTM D5185(m)	1270	1167	1131	---
Sulfur	ppm	ASTM D5185(m)	2060	2456	2650	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.4	16.1	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 12.1	13.1	---

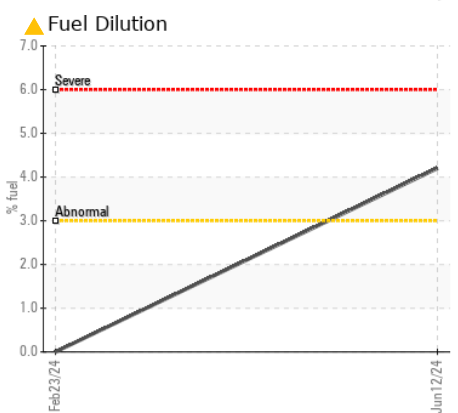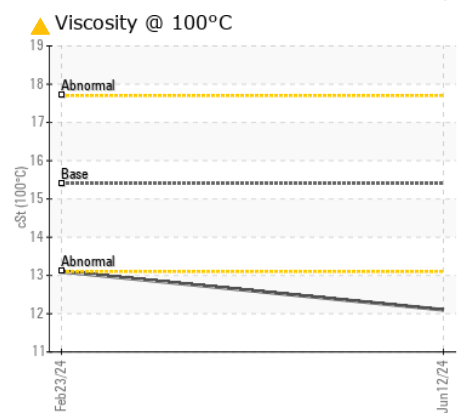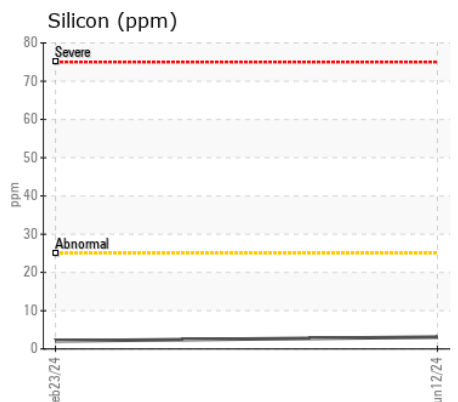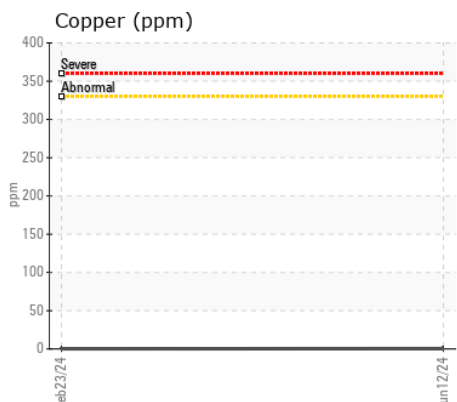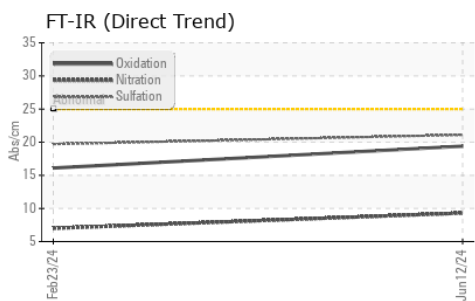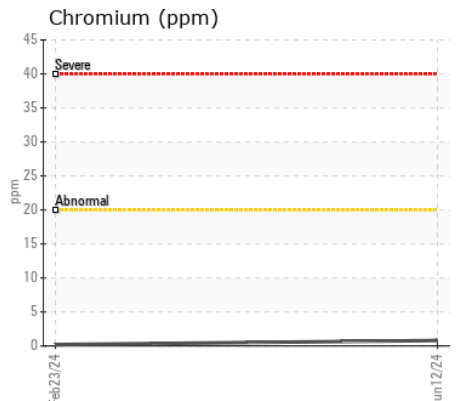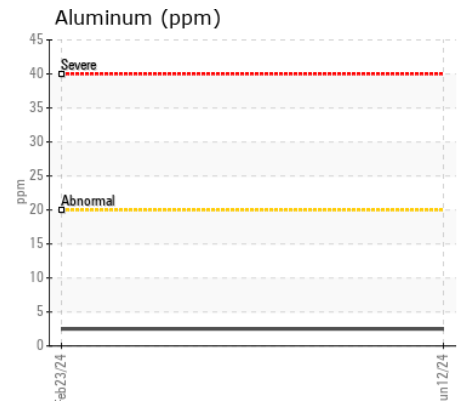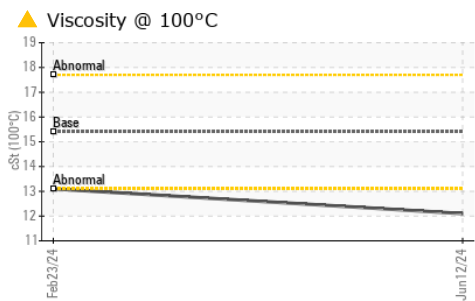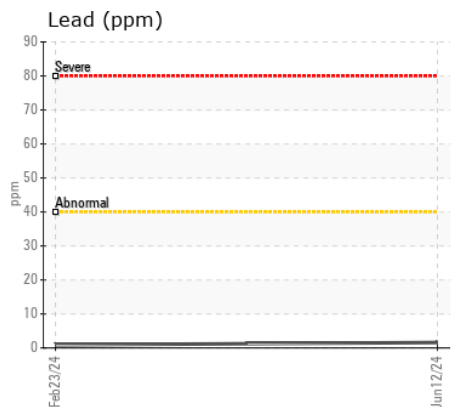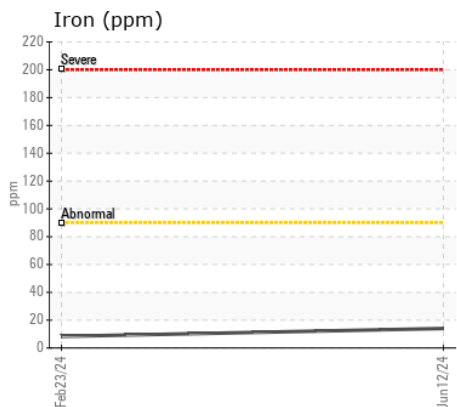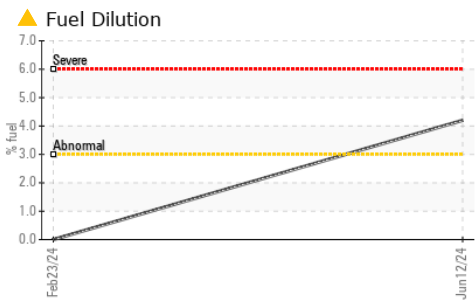

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0097992 **Received** : 02 Jul 2024
Lab Number : 02644795 **Tested** : 03 Jul 2024
Unique Number : 5802334 **Diagnosed** : 03 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 593
 4421 Boban Drive
 Nanaimo, BC
 CA V9T 6A6
 Contact: Patrick Rutti
 prutti@gflenv.com
 T: (250)739-3345
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.