



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
901069
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 32 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0097989	GFL0082143	---
Sample Date		Client Info		08 May 2024	09 Nov 2023	---
Machine Age	hrs	Client Info		12274	11547	---
Oil Age	hrs	Client Info		0	685	---
Filter Age	hrs	Client Info		0	685	---
Oil Changed		Client Info		Not Changed	N/A	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>20	4	11	---
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>10	<1	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	<1	---
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	---
Lead	ppm	ASTM D5185(m)	>10	0	1	---
Copper	ppm	ASTM D5185(m)	>75	3	8	---
Tin	ppm	ASTM D5185(m)	>10	0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>20	2	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	VLITE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		<1	2	---
Boron	ppm	ASTM D5185(m)	0	<1	<1	---
Barium	ppm	ASTM D5185(m)	0	0	<1	---
Molybdenum	ppm	ASTM D5185(m)	0	0	0	---
Manganese	ppm	ASTM D5185(m)	1	0	0	---
Magnesium	ppm	ASTM D5185(m)	0	3	3	---
Calcium	ppm	ASTM D5185(m)	50	53	38	---
Phosphorus	ppm	ASTM D5185(m)	330	324	306	---
Zinc	ppm	ASTM D5185(m)	430	422	387	---
Sulfur	ppm	ASTM D5185(m)	760	1025	1663	---
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	36.0	35.5	---

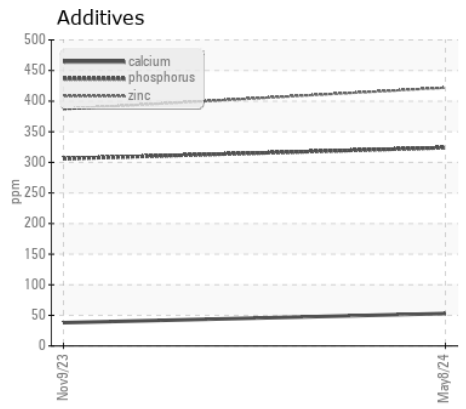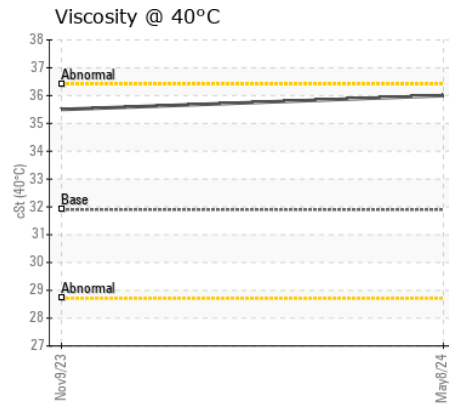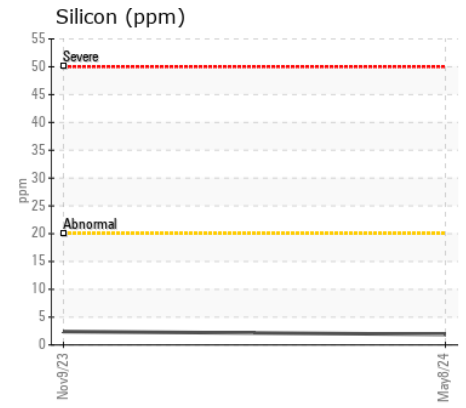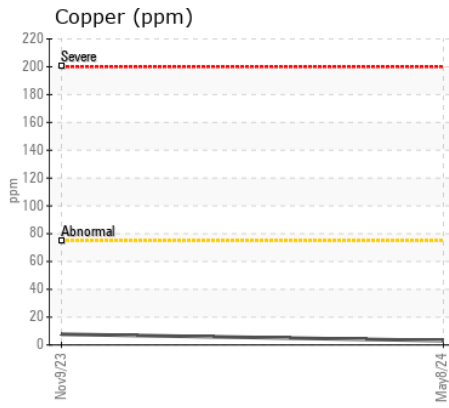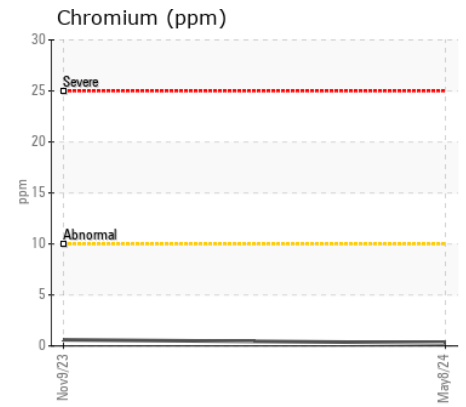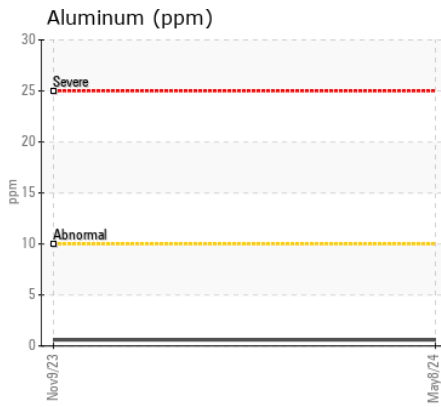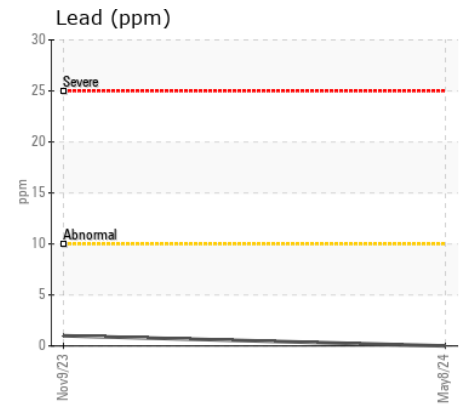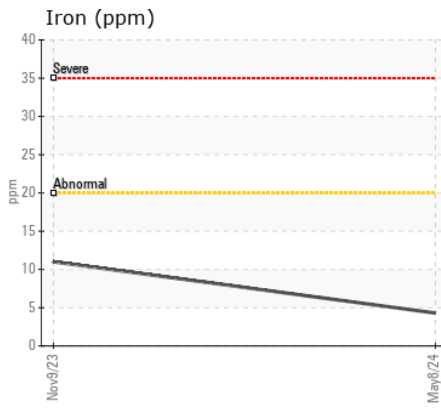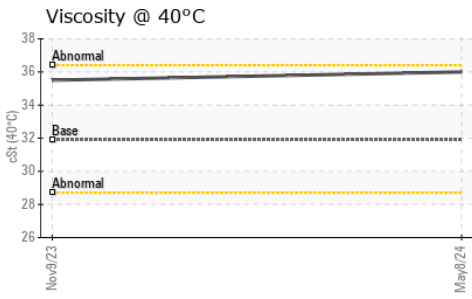

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0097989 **Received** : 02 Jul 2024
Lab Number : 02644918 **Tested** : 03 Jul 2024
Unique Number : 5802457 **Diagnosed** : 04 Jul 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Bottom, BottomAnalysis, FilterPatch)

GFL Environmental - 593
 4421 Boban Drive
 Nanaimo, BC
 CA V9T 6A6
 Contact: Patrick Rutti
 prutti@gflenv.com
 T: (250)739-3345
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.