

Machine Id
713073
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0119768	GFL0114796	GFL0103662
Sample Date		Client Info		18 Jun 2024	12 Apr 2024	02 Jan 2024
Machine Age	hrs	Client Info		3110	2641	2072
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>100	14	21	19
Chromium	ppm	ASTM D5185(m)	>20	<1	1	1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	4	4	6
Lead	ppm	ASTM D5185(m)	>40	0	0	2
Copper	ppm	ASTM D5185(m)	>330	8	27	77
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.


Silicon	ppm	ASTM D5185(m)	>25	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	10	10	23
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	0.0
Soot %	%	ASTM D7844*	>3	0.4	0.5	0.4
Nitration	Abs/cm	ASTM D7624*	>20	8.0	7.8	7.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.6	20.0	20.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION


La viscosité de l'échantillon se situe dans la portée de l'SAE 40; nous vous conseillons de vérifier. L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		2	1	1
Boron	ppm	ASTM D5185(m)	250	17	2	1
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	48	59	59
Manganese	ppm	ASTM D5185(m)		<1	<1	0
Magnesium	ppm	ASTM D5185(m)	450	635	979	962
Calcium	ppm	ASTM D5185(m)	3000	1455	1054	1114
Phosphorus	ppm	ASTM D5185(m)	1150	775	978	993
Zinc	ppm	ASTM D5185(m)	1350	988	1176	1194
Sulfur	ppm	ASTM D5185(m)	4250	2028	2340	2469
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.1	14.9	15.0
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	▲ 13.4	11.4	11.4


▲ Viscosity @ 100°C

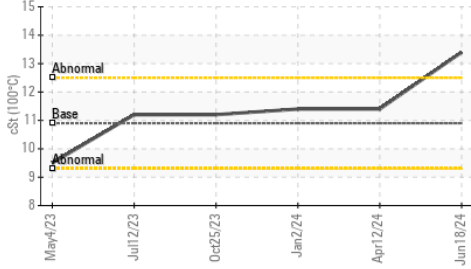


Iron (ppm)

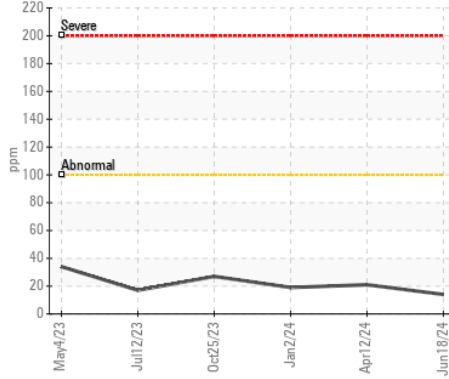


Lead (ppm)

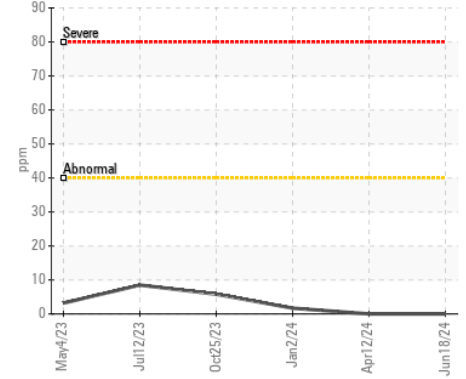


FT-IR (Direct Trend)

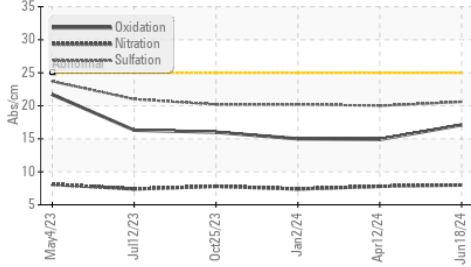


Aluminum (ppm)

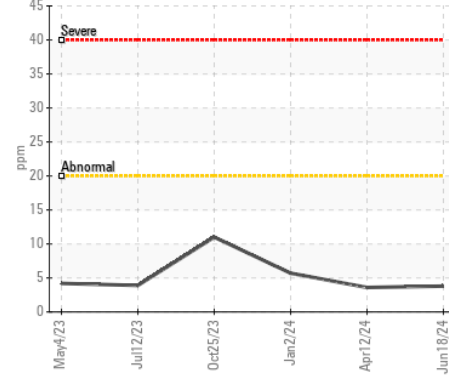


Chromium (ppm)

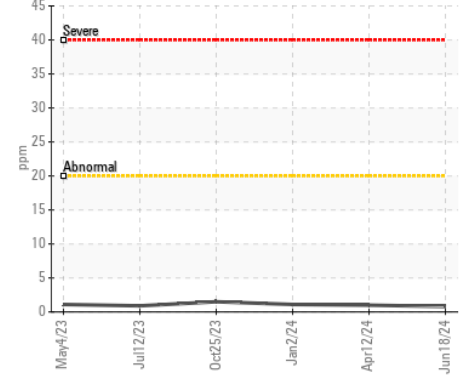


Copper (ppm)

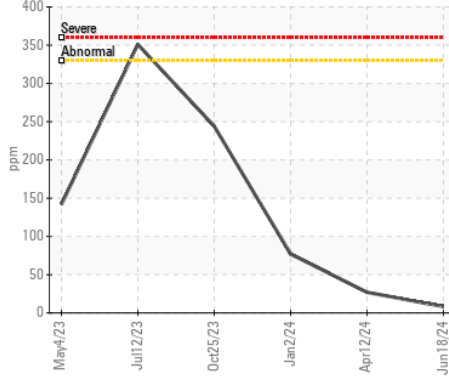


Silicon (ppm)

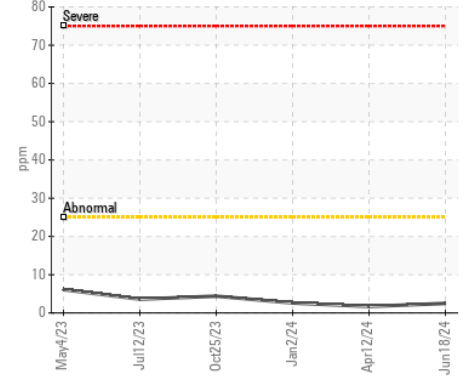

▲ Viscosity @ 100°C

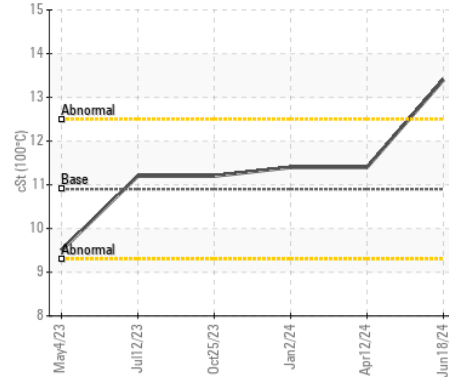

Soot %

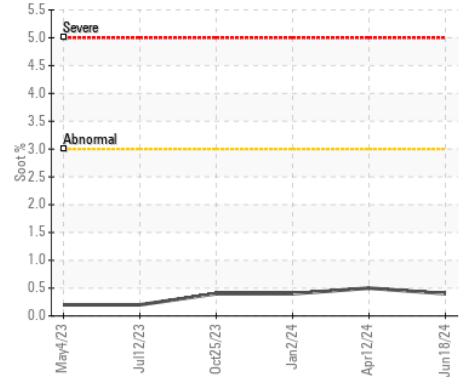

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0119768
Lab Number : 02645226
Unique Number : 5802765
Test Package : MOB 1
Received : 03 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 03 Jul 2024 - Kevin Marson

GFL Environmental - 780 - GMA - ICI - Solid Waste
 4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Louis Michaud
 louis.michaud@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: