

Machine Id
713069
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0119743	GFL0114821	GFL0103735
Sample Date		Client Info		28 Jun 2024	24 Apr 2024	15 Jan 2024
Machine Age	hrs	Client Info		2803	2421	1850
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>100	11	19	17
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	3	3	5
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	10	19	38
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.


Silicon	ppm	ASTM D5185(m)	>25	2	2	2
Potassium	ppm	ASTM D5185(m)	>20	5	7	14
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.5	0.6	0.5
Nitration	Abs/cm	ASTM D7624*	>20	7.9	7.9	7.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.2	20.1	20.4
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION


La viscosité de l'échantillon se situe dans la portée de l'SAE 40; nous vous conseillons de vérifier. L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		3	1	1
Boron	ppm	ASTM D5185(m)	250	19	2	4
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	51	61	56
Manganese	ppm	ASTM D5185(m)		<1	<1	0
Magnesium	ppm	ASTM D5185(m)	450	686	974	859
Calcium	ppm	ASTM D5185(m)	3000	1357	1101	1174
Phosphorus	ppm	ASTM D5185(m)	1150	782	990	935
Zinc	ppm	ASTM D5185(m)	1350	981	1200	1098
Sulfur	ppm	ASTM D5185(m)	4250	2055	2381	2517
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.9	14.5	15.3
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	▲ 14.2	11.6	11.6


▲ Viscosity @ 100°C

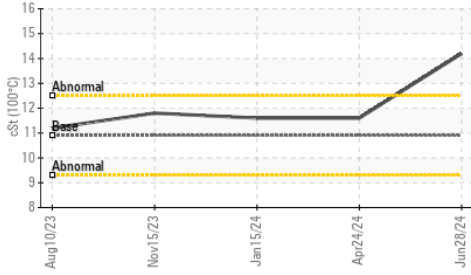


FT-IR (Direct Trend)

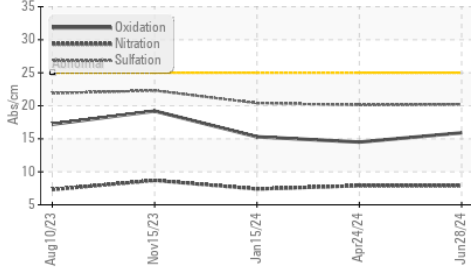


Iron (ppm)

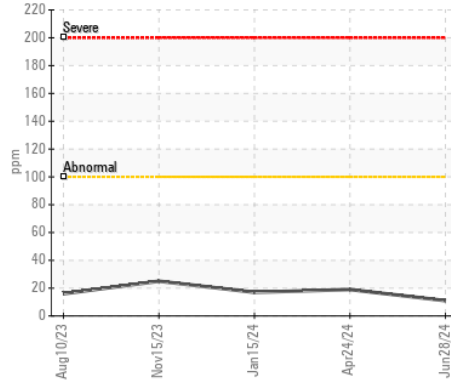


Aluminum (ppm)

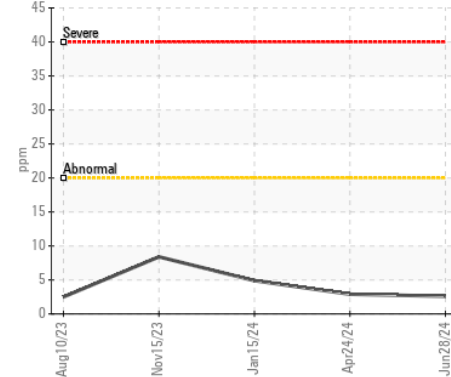


Copper (ppm)

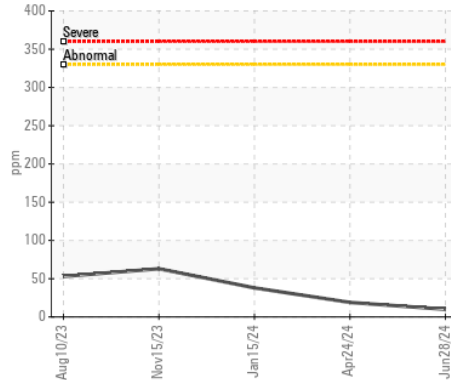


▲ Viscosity @ 100°C

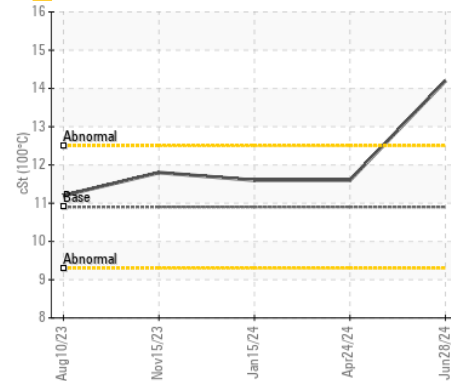


Lead (ppm)

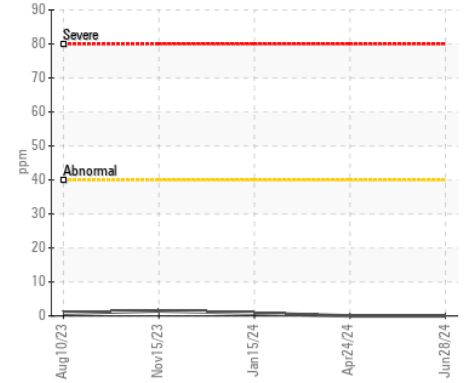


Chromium (ppm)

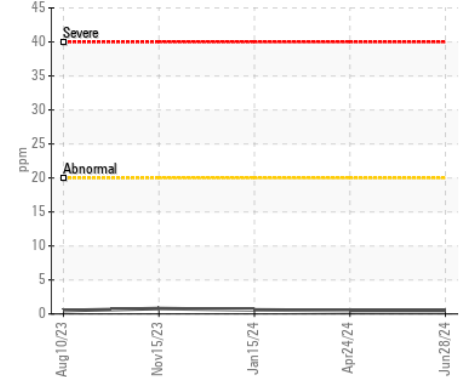

Silicon (ppm)

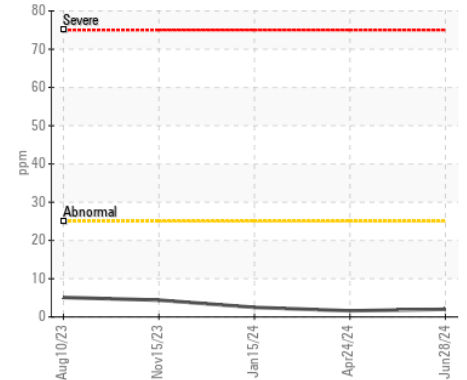

Soot %

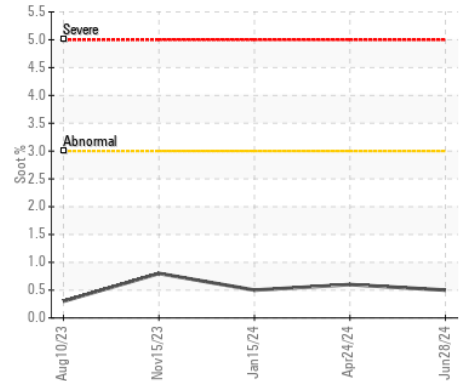

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0119743
Lab Number : 02645228
Unique Number : 5802767
Test Package : MOB 1

Received : 03 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 03 Jul 2024 - Kevin Marson

GFL Environmental - 780 - GMA - ICI - Solid Waste
 4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Louis Michaud
 louis.michaud@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: