



Machine Id  
**731088**  
Component  
**Transmission (Auto)**  
Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number  |     | Client Info |           | <b>GFL0125473</b>  | ---      | ---      |
| Sample Date    |     | Client Info |           | <b>02 Jul 2024</b> | ---      | ---      |
| Machine Age    | hrs | Client Info |           | <b>7866</b>        | ---      | ---      |
| Oil Age        | hrs | Client Info |           | <b>0</b>           | ---      | ---      |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | ---      | ---      |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | ---      | ---      |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | ---      | ---      |
| Sample Status  |     |             |           | <b>NORMAL</b>      | ---      | ---      |

**WEAR**

All component wear rates are normal.

|              |        |               |      |              |     |     |
|--------------|--------|---------------|------|--------------|-----|-----|
| Iron         | ppm    | ASTM D5185(m) | >160 | <b>45</b>    | --- | --- |
| Chromium     | ppm    | ASTM D5185(m) | >5   | <b>0</b>     | --- | --- |
| Nickel       | ppm    | ASTM D5185(m) | >5   | <b>&lt;1</b> | --- | --- |
| Titanium     | ppm    | ASTM D5185(m) |      | <b>0</b>     | --- | --- |
| Silver       | ppm    | ASTM D5185(m) | >5   | <b>0</b>     | --- | --- |
| Aluminum     | ppm    | ASTM D5185(m) | >50  | <b>23</b>    | --- | --- |
| Lead         | ppm    | ASTM D5185(m) | >50  | <b>4</b>     | --- | --- |
| Copper       | ppm    | ASTM D5185(m) | >225 | <b>15</b>    | --- | --- |
| Tin          | ppm    | ASTM D5185(m) | >10  | <b>2</b>     | --- | --- |
| Vanadium     | ppm    | ASTM D5185(m) |      | <b>0</b>     | --- | --- |
| White Metal  | scalar | Visual*       | NONE | <b>NONE</b>  | --- | --- |
| Yellow Metal | scalar | Visual*       | NONE | <b>NONE</b>  | --- | --- |

**CONTAMINATION**











There is no indication of any contamination in the fluid.

|                  |        |               |       |              |     |     |
|------------------|--------|---------------|-------|--------------|-----|-----|
| Silicon          | ppm    | ASTM D5185(m) | >20   | <b>4</b>     | --- | --- |
| Potassium        | ppm    | ASTM D5185(m) | >20   | <b>2</b>     | --- | --- |
| Water            |        | WC Method     | >0.1  | <b>NEG</b>   | --- | --- |
| Silt             | scalar | Visual*       | NONE  | <b>NONE</b>  | --- | --- |
| Debris           | scalar | Visual*       | NONE  | <b>NONE</b>  | --- | --- |
| Sand/Dirt        | scalar | Visual*       | NONE  | <b>NONE</b>  | --- | --- |
| Appearance       | scalar | Visual*       | NORML | <b>NORML</b> | --- | --- |
| Odor             | scalar | Visual*       | NORML | <b>NORML</b> | --- | --- |
| Emulsified Water | scalar | Visual*       | >0.1  | <b>NEG</b>   | --- | --- |

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

|             |     |               |      |              |     |     |
|-------------|-----|---------------|------|--------------|-----|-----|
| Sodium      | ppm | ASTM D5185(m) |      | <b>5</b>     | --- | --- |
| Boron       | ppm | ASTM D5185(m) | 78   | <b>60</b>    | --- | --- |
| Barium      | ppm | ASTM D5185(m) |      | <b>&lt;1</b> | --- | --- |
| Molybdenum  | ppm | ASTM D5185(m) | 0    | <b>2</b>     | --- | --- |
| Manganese   | ppm | ASTM D5185(m) |      | <b>&lt;1</b> | --- | --- |
| Magnesium   | ppm | ASTM D5185(m) | 0    | <b>38</b>    | --- | --- |
| Calcium     | ppm | ASTM D5185(m) | 113  | <b>154</b>   | --- | --- |
| Phosphorus  | ppm | ASTM D5185(m) | 222  | <b>246</b>   | --- | --- |
| Zinc        | ppm | ASTM D5185(m) |      | <b>52</b>    | --- | --- |
| Sulfur      | ppm | ASTM D5185(m) | 1326 | <b>1328</b>  | --- | --- |
| Visc @ 40°C | cSt | ASTM D7279(m) | 34.8 | <b>33.9</b>  | --- | --- |

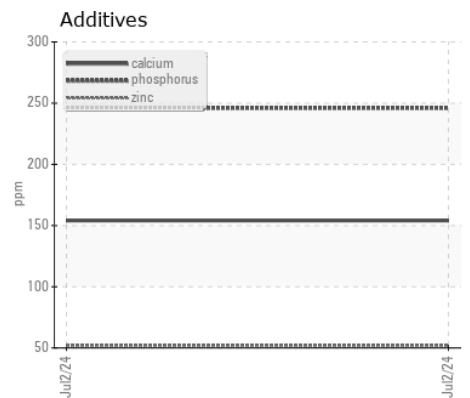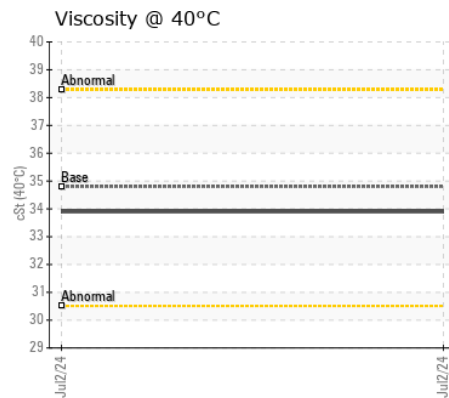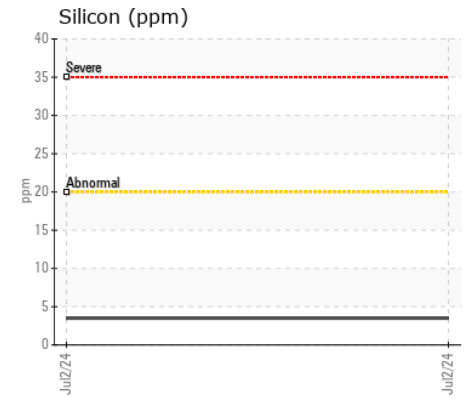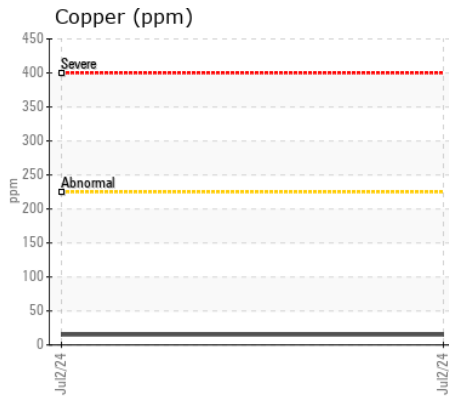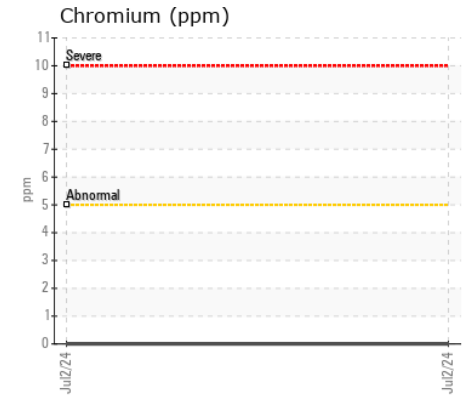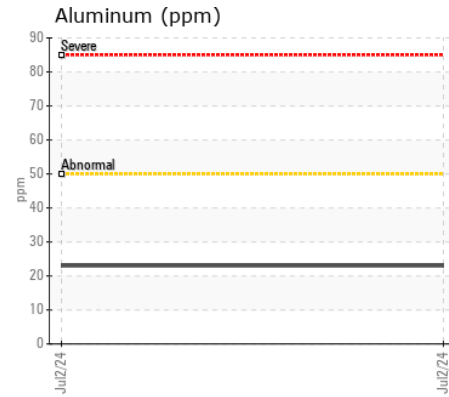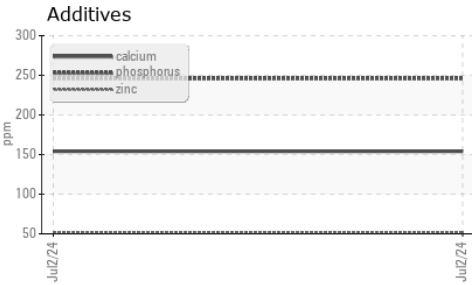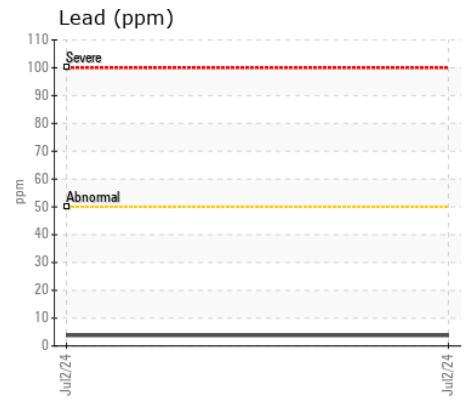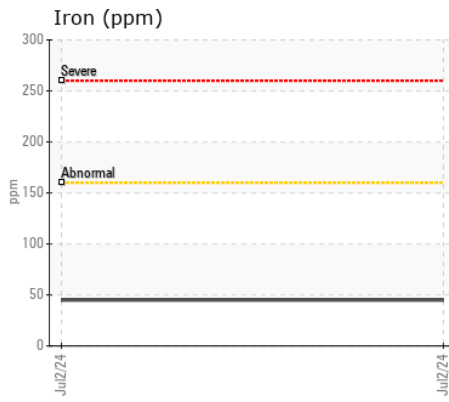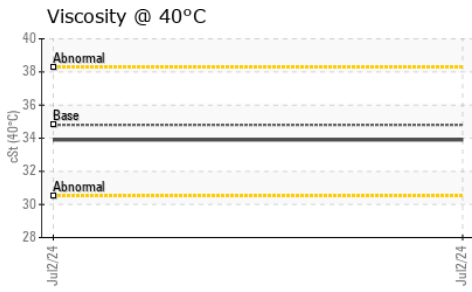

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0125473  
**Lab Number** : 02645290  
**Unique Number** : 5802829  
**Test Package** : MOB 1

**GFL Environmental - 209 - Hamilton**  
 560 Seaman Street  
 Stoney Creek, ON  
 CA L8E 3X7  
 Contact: Fred Carleton  
 fred.carleton@gflenv.com  
 T: (289)925-6693  
 F: (905)664-9008

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.