



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
056255-1007

Component
Splitter Box

Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0292221	LH0270057	LH0235492
Sample Date		Client Info		26 Jun 2024	14 Jul 2023	27 Jun 2022
Machine Age	hrs	Client Info		17524	16930	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	17	18	33
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)		<1	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>30	0	0	<1
Copper	ppm	ASTM D5185(m)	>20	<1	<1	6
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	2	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	3	3	3
Boron	ppm	ASTM D5185(m)	328	192	145	18
Barium	ppm	ASTM D5185(m)	1	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<1	<1	0
Manganese	ppm	ASTM D5185(m)		<1	<1	1
Magnesium	ppm	ASTM D5185(m)	1	9	5	4
Calcium	ppm	ASTM D5185(m)	7	38	36	21
Phosphorus	ppm	ASTM D5185(m)	1145	1224	1479	1737
Zinc	ppm	ASTM D5185(m)	3	109	102	60
Sulfur	ppm	ASTM D5185(m)	17909	19468	20912	25385
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	92.3	103	132

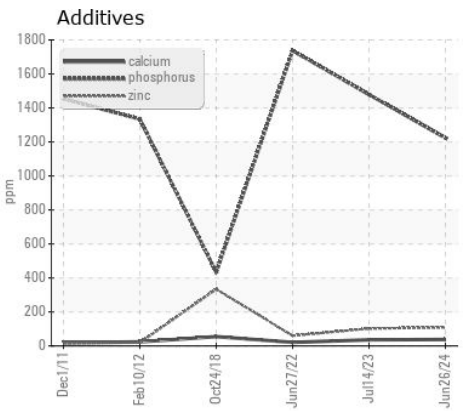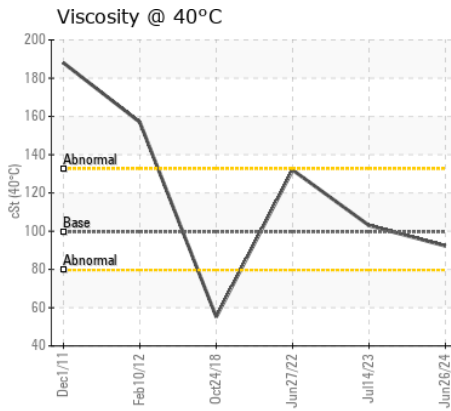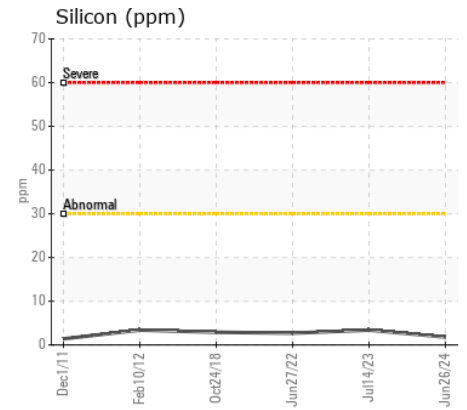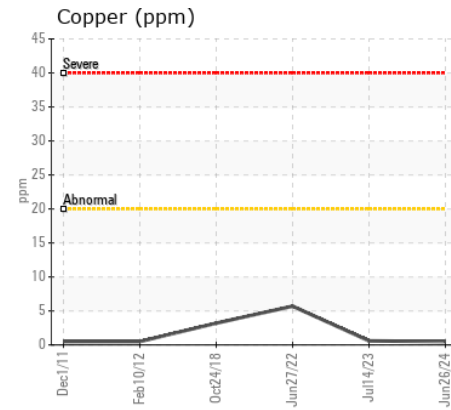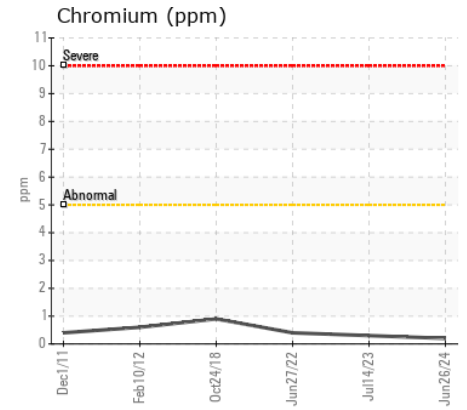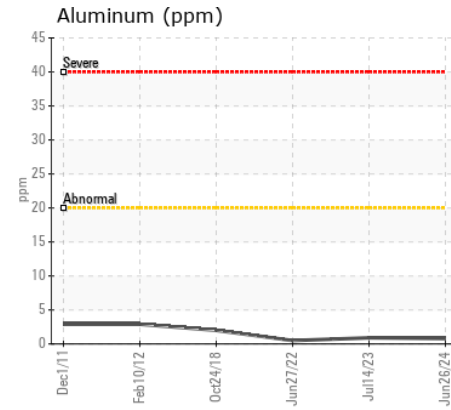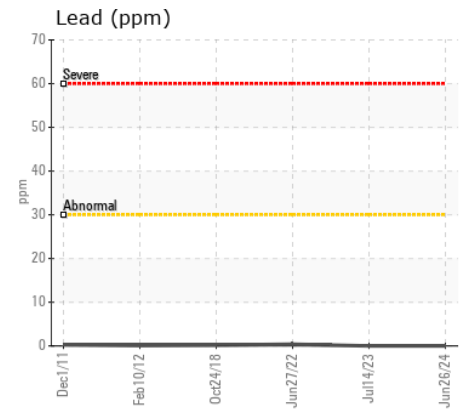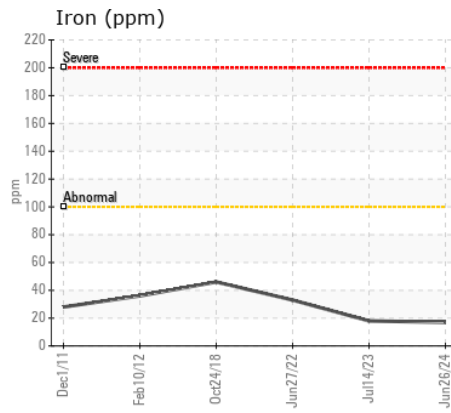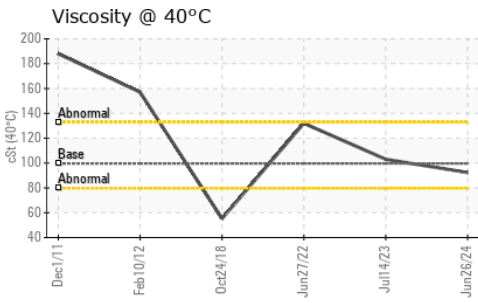

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0292221
Lab Number : 02645299
Unique Number : 5802838
Test Package : MOB 1
Received : 03 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 03 Jul 2024 - Wes Davis

American Iron and Metal
 9100 BOUL HENRI-BOURASSA EST
 MONTREAL, QC
 CA H1E 2S4
 Contact: Sebastien Liautaud
 sliautaud@aimrecyclinggroup.com
 T: (514)494-2000
 F: (450)661-5033

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.