



Machine Id
401198
Component
Transmission (Auto)
Fluid
TES SYN 295 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0112001	---	---
Sample Date		Client Info		02 Jul 2024	---	---
Machine Age	hrs	Client Info		21185	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>220	7	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>75	2	---	---
Lead	ppm	ASTM D5185(m)	>95	<1	---	---
Copper	ppm	ASTM D5185(m)	>60	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>25	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Soot %	%	ASTM D7844*		0.4	---	---
Nitration	Abs/cm	ASTM D7624*		8.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*		19.4	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 15W40 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)	85	2	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	57	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1	956	---	---
Calcium	ppm	ASTM D5185(m)	100	1049	---	---
Phosphorus	ppm	ASTM D5185(m)	200	982	---	---
Zinc	ppm	ASTM D5185(m)	0	1197	---	---
Sulfur	ppm	ASTM D5185(m)	1500	2498	---	---
Oxidation	Abs/.1mm	ASTM D7414*		15.9	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	37.0	▲ 102	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	7.3	▲ 13.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	165	136	---	---

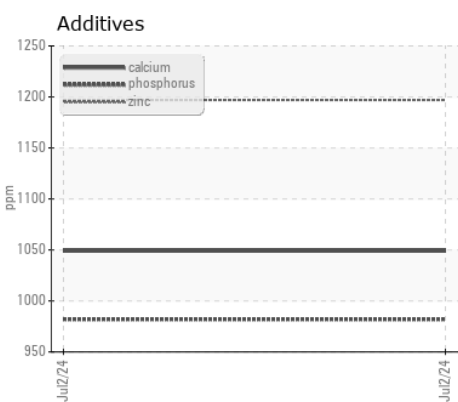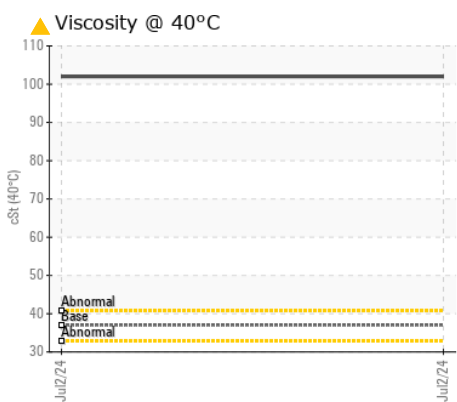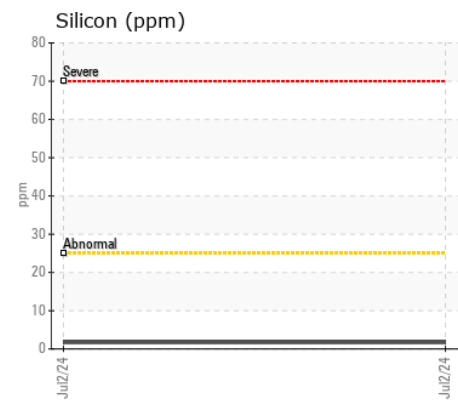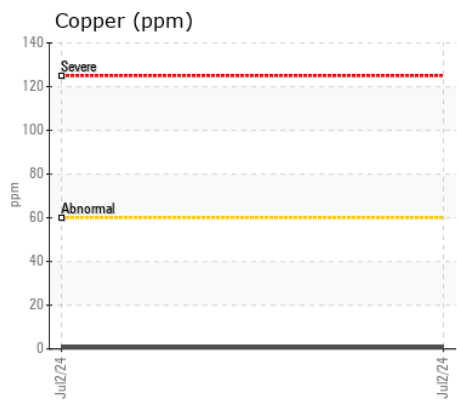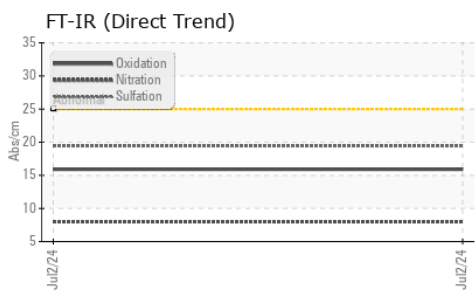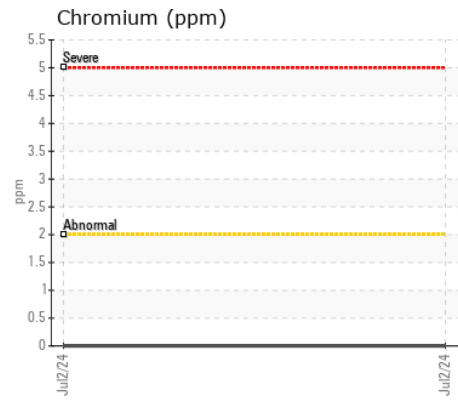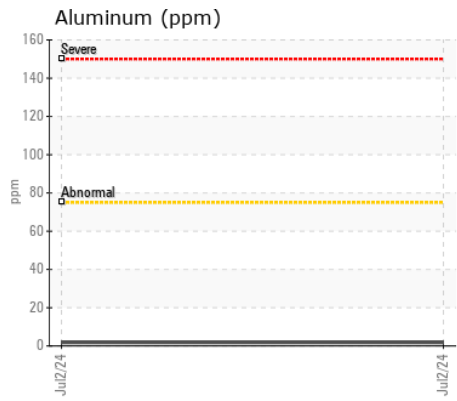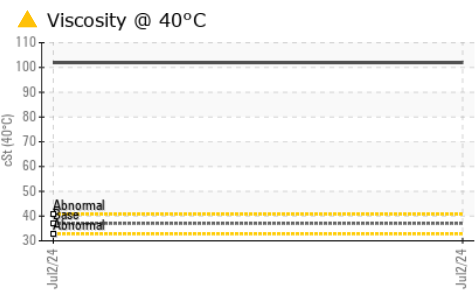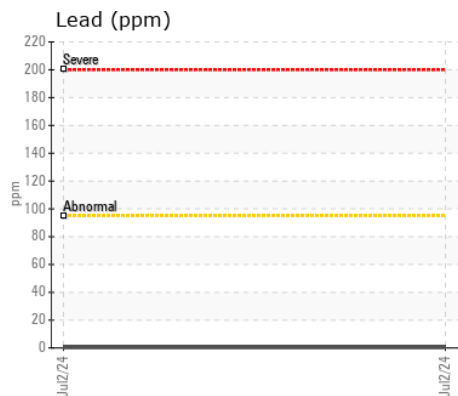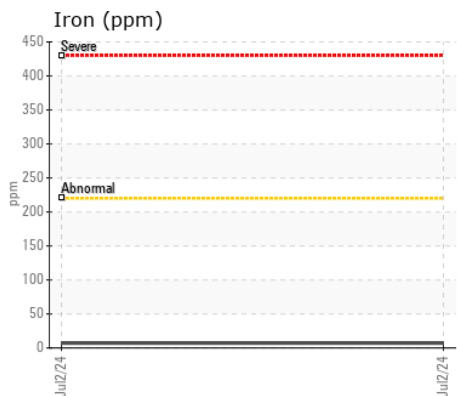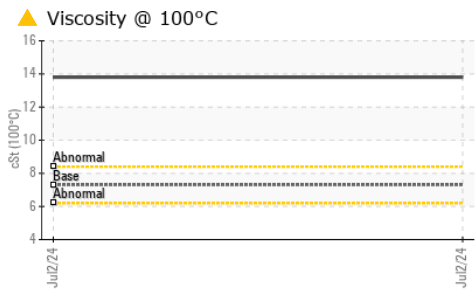

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112001 **Received** : 04 Jul 2024
Lab Number : 02645390 **Tested** : 05 Jul 2024
Unique Number : 5802929 **Diagnosed** : 05 Jul 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FT-IR, KV100, VI)

GFL Environmental - 574 - Coquitlam
 70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Sanjay Kisun
 skisun@gflenv.com
 T: (604)529-4030
 F: (604)529-4026

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.