



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
AGNICO EAGLE
Machine Id
KUBOTA RTVX900 MCP726
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0930765	WC0933382	WC0879682
Sample Date		Client Info		30 Jun 2024	05 May 2024	26 Feb 2024
Machine Age	hrs	Client Info		4158	3904	3658
Oil Age	hrs	Client Info		250	0	0
Filter Age	hrs	Client Info		250	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	16	49	64
Chromium	ppm	ASTM D5185(m)	>20	<1	2	2
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	3	11	15
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	9	18	▲ 36
Potassium	ppm	ASTM D5185(m)	>20	<1	2	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.3	1.1	1.3
Nitration	Abs/cm	ASTM D7624*	>20	6.4	10.3	11.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.5	26.1	26.8
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>118	3	4	5
Boron	ppm	ASTM D5185(m)		53	42	39
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		37	44	47
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		475	567	574
Calcium	ppm	ASTM D5185(m)		1596	1913	1942
Phosphorus	ppm	ASTM D5185(m)		676	768	791
Zinc	ppm	ASTM D5185(m)		818	950	955
Sulfur	ppm	ASTM D5185(m)		1940	2033	2095
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.1	23.5	24.8
Visc @ 100°C	cSt	ASTM D7279(m)		14.1	15.0	15.2

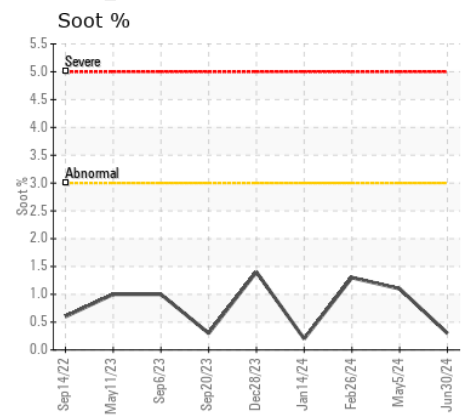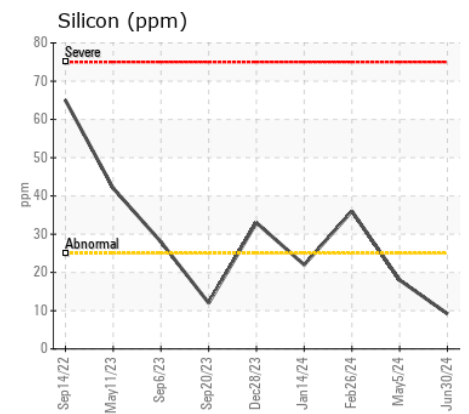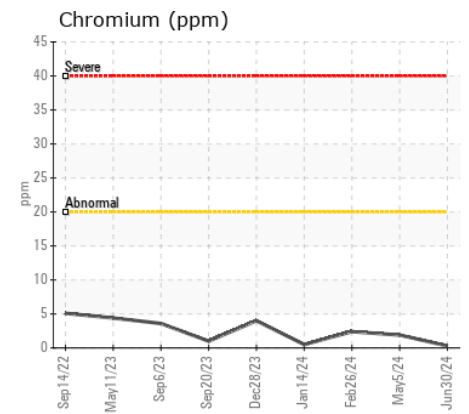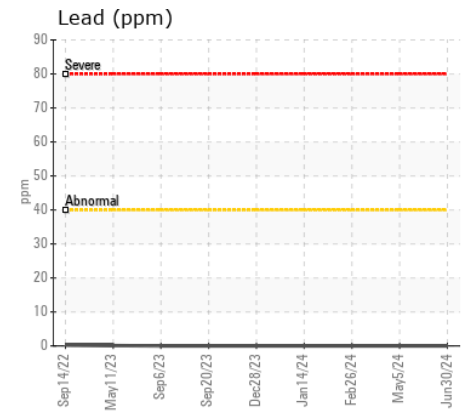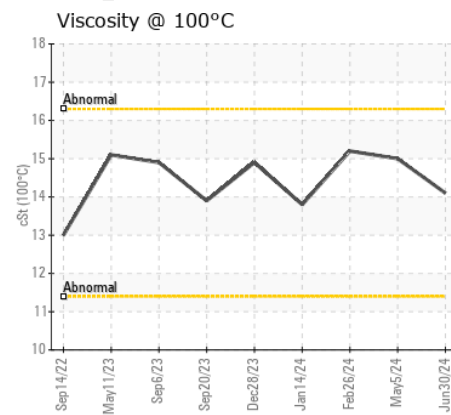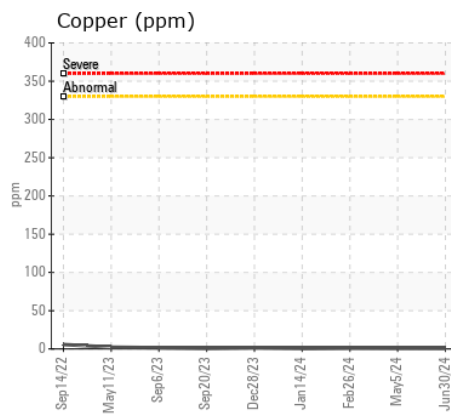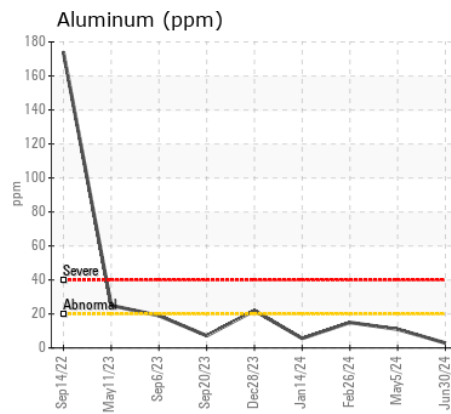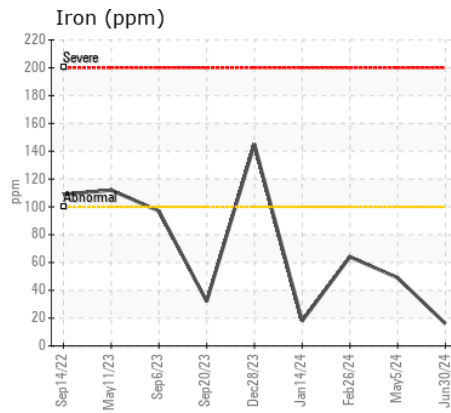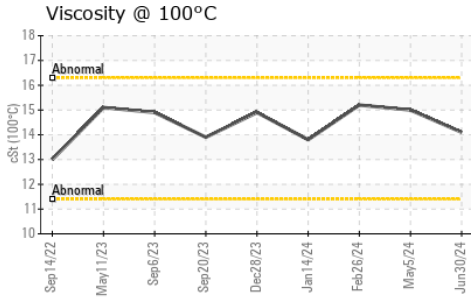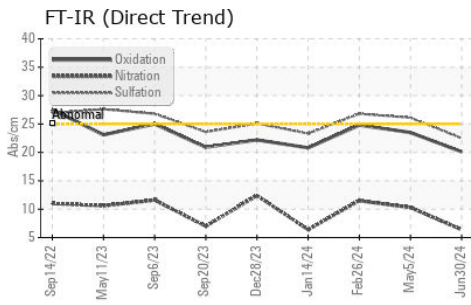

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0930765
Lab Number : 02645403
Unique Number : 5802942
Test Package : MOB 1

Received : 04 Jul 2024
Tested : 04 Jul 2024
Diagnosed : 04 Jul 2024 - Wes Davis

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Jay Gould
 MacassaMobileUGPlanning@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.