



Machine Id
WL0404
Component
Transmission (Manual)
Fluid
SAE 30W (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0119170	GFL0067513	GFL0067499
Sample Date		Client Info		03 Jun 2024	27 Feb 2024	09 May 2023
Machine Age	hrs	Client Info		0	0	1412
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185(m)	>200	18	10	18
Chromium	ppm	ASTM D5185(m)	>5	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>7	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	2	1	2
Lead	ppm	ASTM D5185(m)	>45	<1	0	<1
Copper	ppm	ASTM D5185(m)	>225	7	<1	6
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>125	5	3	4
Potassium	ppm	ASTM D5185(m)	>20	<1	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	LIGHT
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<1	2	1
Boron	ppm	ASTM D5185(m)		21	22	<1
Barium	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		23	1	0
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)		140	19	3
Calcium	ppm	ASTM D5185(m)		2235	2949	185
Phosphorus	ppm	ASTM D5185(m)		792	942	752
Zinc	ppm	ASTM D5185(m)		951	1112	909
Sulfur	ppm	ASTM D5185(m)		3763	4345	1541
Visc @ 40°C	cSt	ASTM D7279(m)	95.0	76.5	▲ 71.6	▲ 42.0

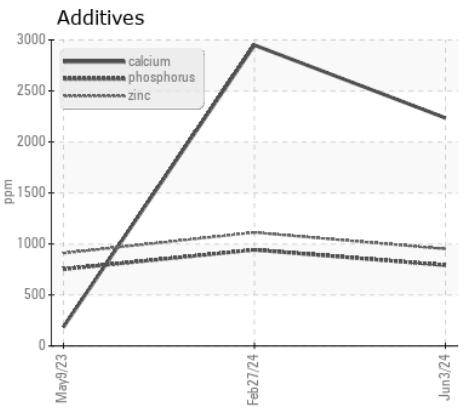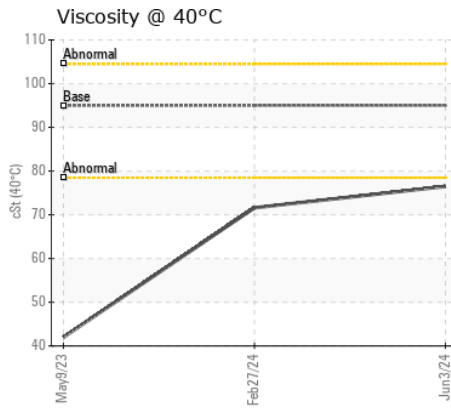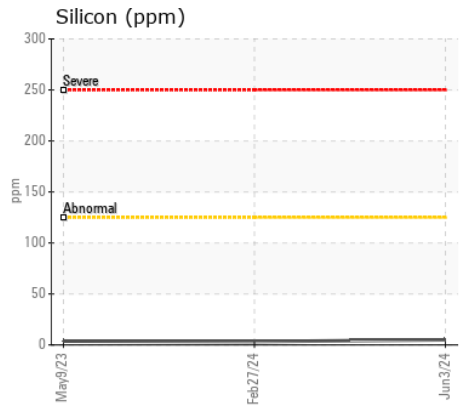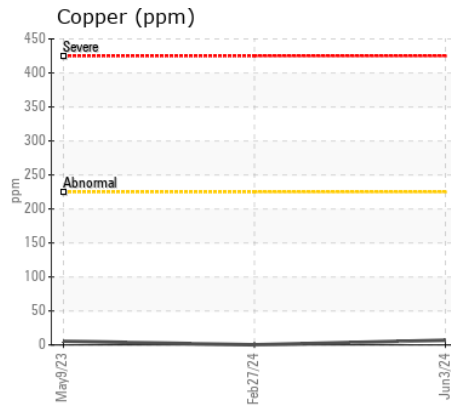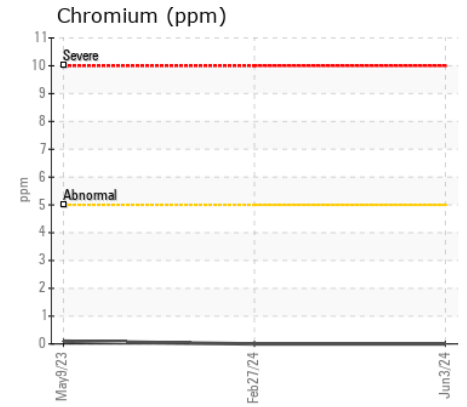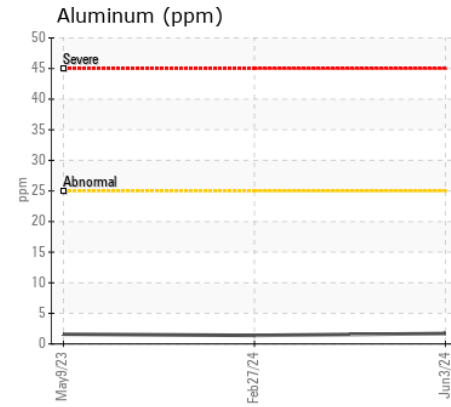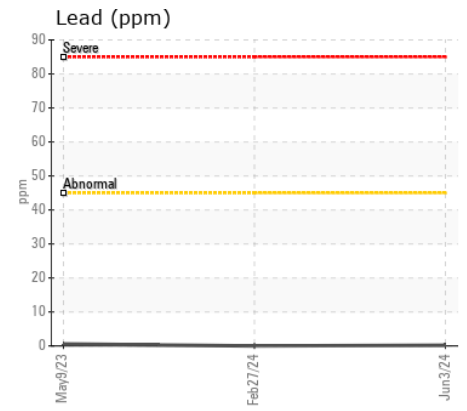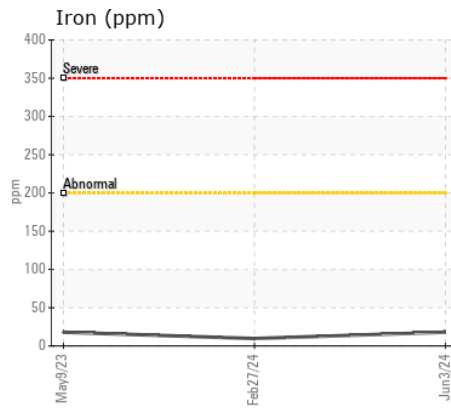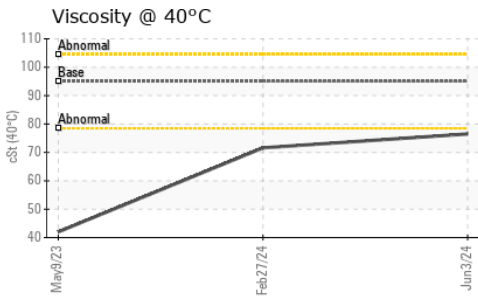

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 743 - Montreal Est CD Processing**
Sample No. : GFL0119170 **Received** : 04 Jul 2024 10930 rue Sherbrooke
Lab Number : 02645526 **Tested** : 04 Jul 2024 Montreal, QC
Unique Number : 5803065 **Diagnosed** : 05 Jul 2024 - Kevin Marson CA H1B 1B4
Test Package : MOB 1 **Contact:** Patrick Beaulieu
 patrick.beaulieu@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.