



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WESTERN STAR 118787

Component
Front Diesel Engine

Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KLMFA08635	KLMFA06552	KLMFA04305
Sample Date		Client Info		15 Apr 2013	25 Feb 2013	12 Nov 2012
Machine Age	mls	Client Info		506006	476096	445024
Oil Age	mls	Client Info		348687	318777	287705
Filter Age	mls	Client Info		29910	318777	287705
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m		125	138	114
Chromium	ppm	ASTM D5185m		4	4	2
Nickel	ppm	ASTM D5185m		0	1	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m		6	6	6
Lead	ppm	ASTM D5185m		2	2	3
Copper	ppm	ASTM D5185m		7	9	8
Tin	ppm	ASTM D5185m		<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m		5	4	6
Potassium	ppm	ASTM D5185m		44	▲ 64	▲ 64
Fuel		WC Method		<1.0	<1.0	<1.0
Water		WC Method		NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.7	0.8	0.5
Nitration	Abs/cm	*ASTM D7624		11.	13.	8.
Sulfation	Abs/.1mm	*ASTM D7415		26.	30.	22.
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	4	2
Boron	ppm	ASTM D5185m		143	114	137
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		69	55	62
Manganese	ppm	ASTM D5185m		<1	1	2
Magnesium	ppm	ASTM D5185m		305	251	266
Calcium	ppm	ASTM D5185m		1612	1790	1865
Phosphorus	ppm	ASTM D5185m		1029	944	1053
Zinc	ppm	ASTM D5185m		1175	1052	1117
Sulfur	ppm	ASTM D5185m		3506	3013	3218
Oxidation	Abs/.1mm	*ASTM D7414		27.	31.	18.
Base Number (BN)	mg KOH/g	ASTM D2896		5.83	5.04	7.72
Visc @ 100°C	cSt	ASTM D445		14.54	14.24	13.34
Fluid Type		*In-house		SAE_ENG_DE	SAE_ENG_DE	SAE_ENG_DE

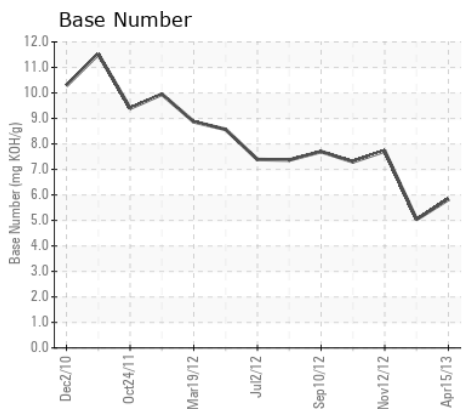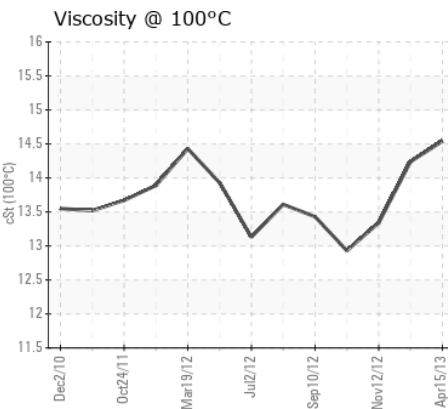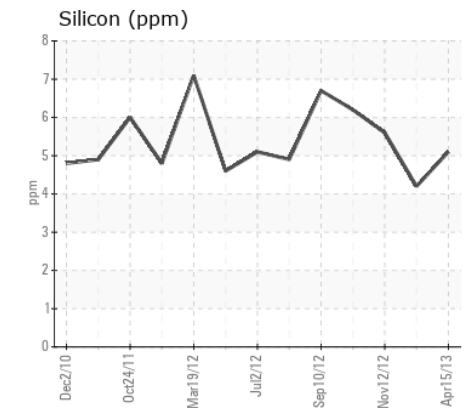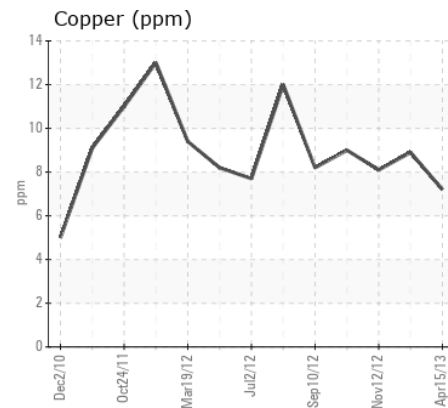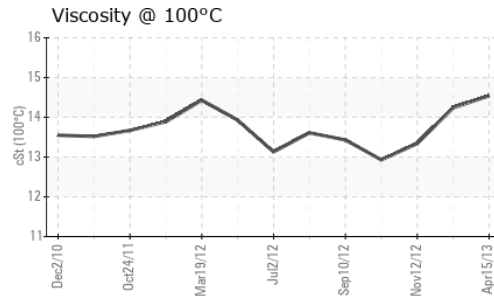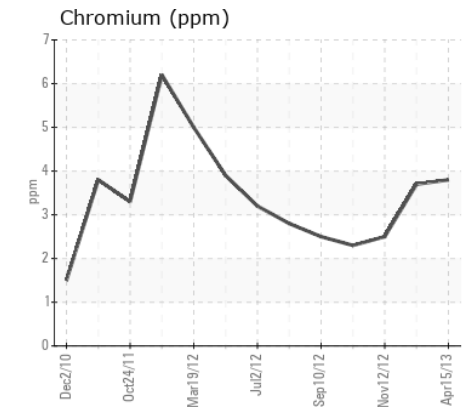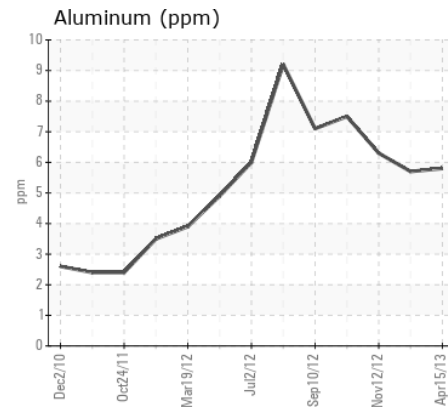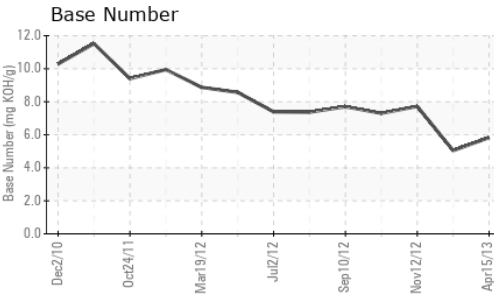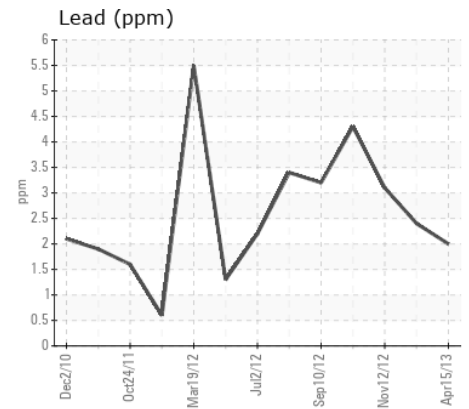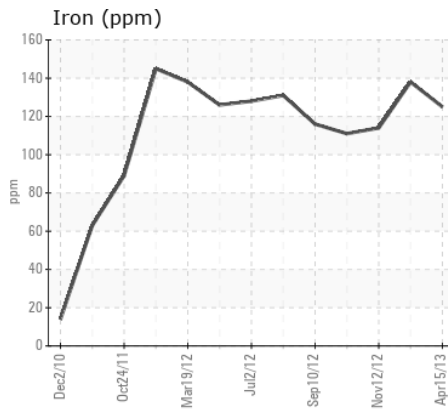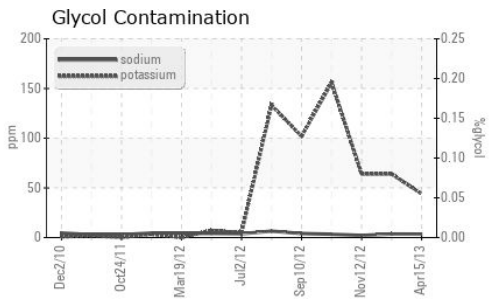

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KLMFA08635 **Received** : 08 May 2013
Lab Number : 03280550 **Diagnosed** : 13 May 2013
Unique Number : 6253208 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FluidDetermination, Glycol, PQ)

EDAN FARMS INC.
 13549 WOODWORTH RD.
 NEW SPRINGFIELD, OH
 US 44443
 Contact: ERIC SCHAEFER
 leslie.edan@zoominternet.net
 T: (330)549-5567
 F: (330)549-0255

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)