



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NOT GIVEN KLMFA15492

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KLMFA15492	---	---
Sample Date		Client Info		13 Jun 2015	---	---
Machine Age	mls	Client Info		128904	---	---
Oil Age	mls	Client Info		914264	---	---
Filter Age	mls	Client Info		28710	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	32	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>2	2	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	6	---	---
Copper	ppm	ASTM D5185m	>330	7	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>25	5	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.8	---	---
Nitration	Abs/cm	*ASTM D7624		9.	---	---
Sulfation	Abs/.1mm	*ASTM D7415		24.	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	250	114	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	83	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	373	---	---
Calcium	ppm	ASTM D5185m	3000	1572	---	---
Phosphorus	ppm	ASTM D5185m	1150	943	---	---
Zinc	ppm	ASTM D5185m	1350	1093	---	---
Sulfur	ppm	ASTM D5185m	4250	3154	---	---
Oxidation	Abs/.1mm	*ASTM D7414		18.	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.50	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.25	---	---

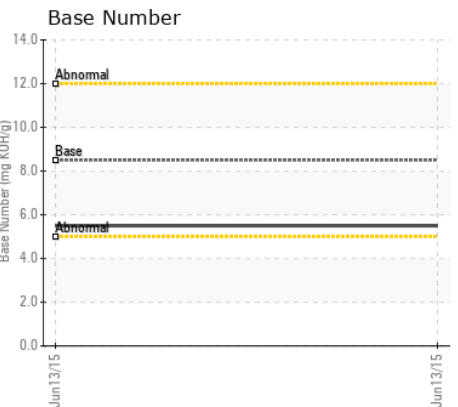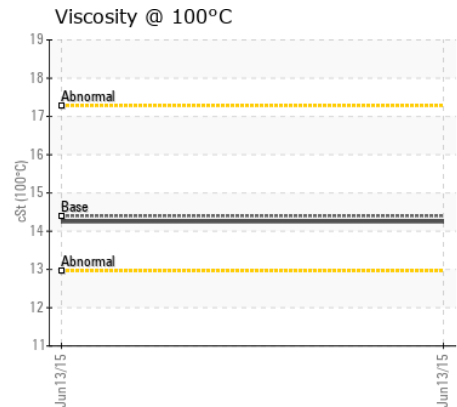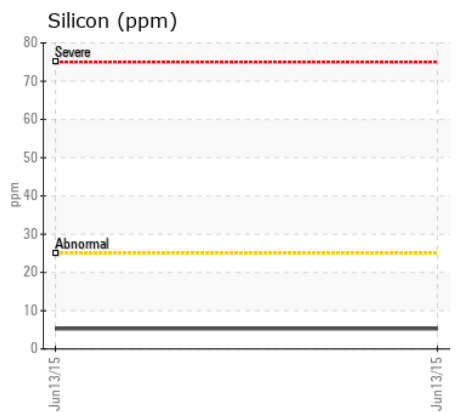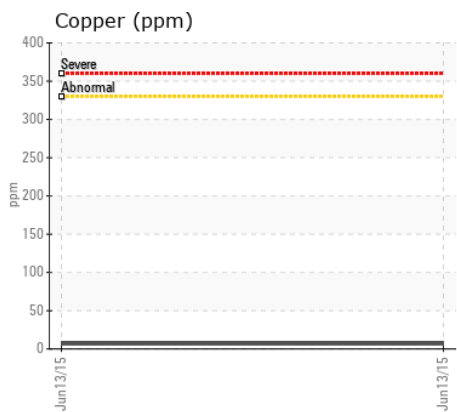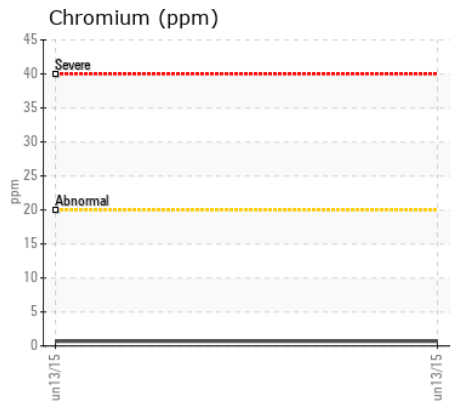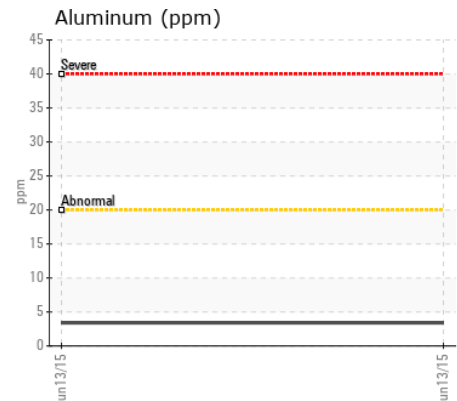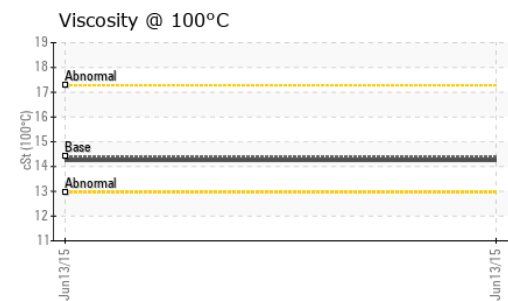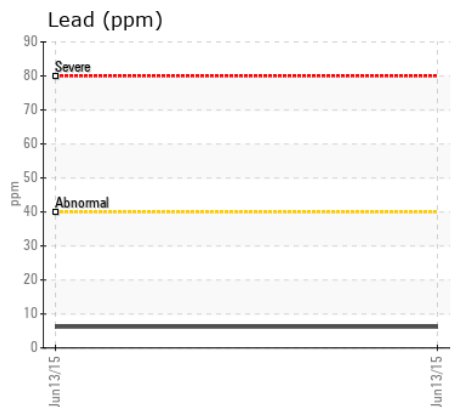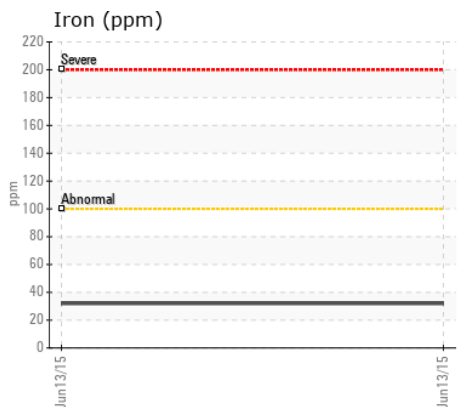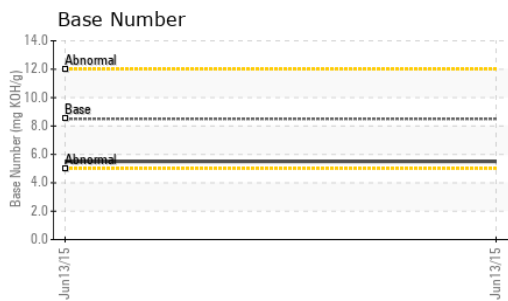

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KLMFA15492 **Received** : 22 Jun 2015
Lab Number : 03767179 **Diagnosed** : 23 Jun 2015
Unique Number : 7045194 **Diagnostician** : Wes Davis
Test Package : MOB 2

EDAN FARMS INC.
 13549 WOODWORTH RD.
 NEW SPRINGFIELD, OH
 US 44443
 Contact: ERIC SCHAEFER
 leslie.edan@zoominternet.net
 T: (330)549-5567
 F: (330)549-0255

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)