



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 2014 F350
 Component
Gasoline Engine
 Fluid
TRC PRO-SPEC MULTI-VIS SB 5W20 (7 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR04607583	TR04374736	TR04139964
Sample Date		Client Info		12 Oct 2018	14 Dec 2017	01 Dec 2016
Machine Age	mls	Client Info		34197	26711	19224
Oil Age	mls	Client Info		7486	7487	5626
Filter Age	mls	Client Info		7486	7487	5626
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	81	82	50
Chromium	ppm	ASTM D5185m	>20	2	2	1
Nickel	ppm	ASTM D5185m	>5	<1	1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	8	13	10
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>155	3	5	5
Tin	ppm	ASTM D5185m	>10	<1	0	4
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	6	9	7
Potassium	ppm	ASTM D5185m	>20	3	5	4
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0	0
Nitration	Abs/cm	*ASTM D7624	>20	13.5	14.	12.
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.6	27.	25.
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	6	7	7
Boron	ppm	ASTM D5185m		21	22	25
Barium	ppm	ASTM D5185m		0	<1	<1
Molybdenum	ppm	ASTM D5185m		126	131	120
Manganese	ppm	ASTM D5185m		9	12	7
Magnesium	ppm	ASTM D5185m		10	25	16
Calcium	ppm	ASTM D5185m	4200	1662	1693	1776
Phosphorus	ppm	ASTM D5185m	800	533	578	608
Zinc	ppm	ASTM D5185m	800	621	709	646
Sulfur	ppm	ASTM D5185m		1902	1614	2005
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.7	25.	20.
Base Number (BN)	mg KOH/g	ASTM D2896	15	3.10	3.40	3.48
Visc @ 100°C	cSt	ASTM D445	8.5	7.5	7.4	7.11

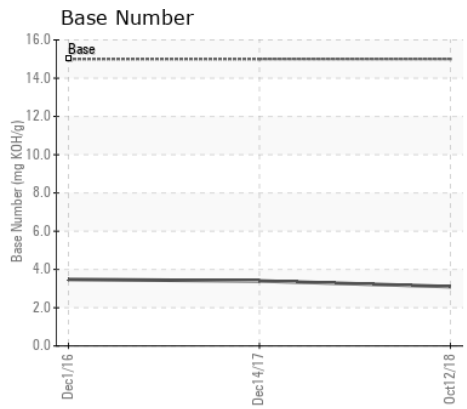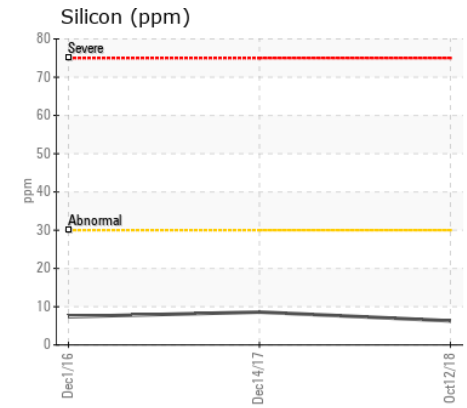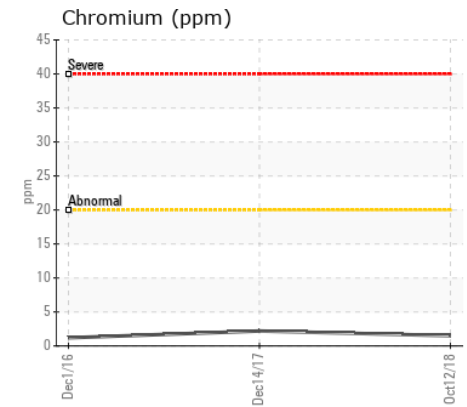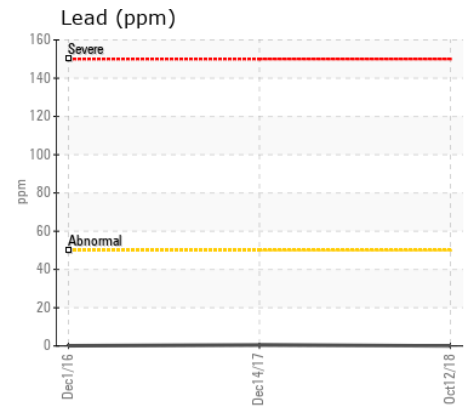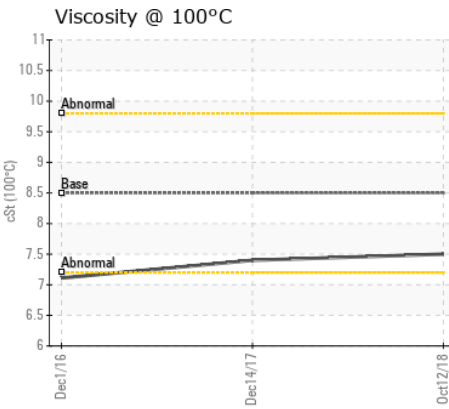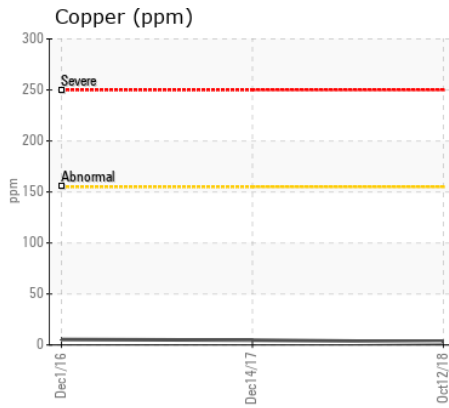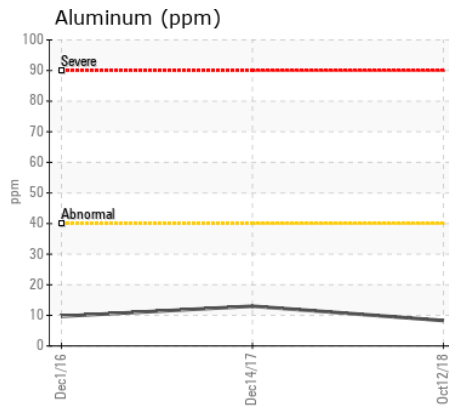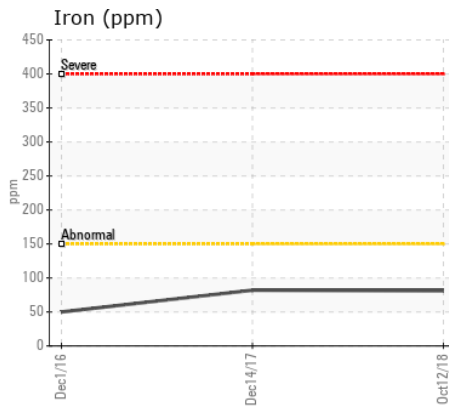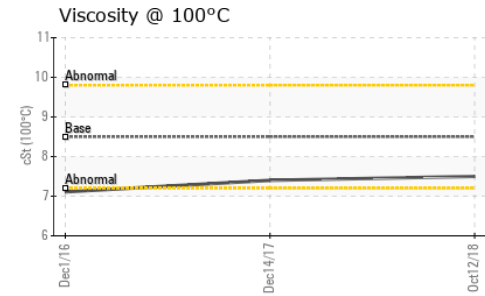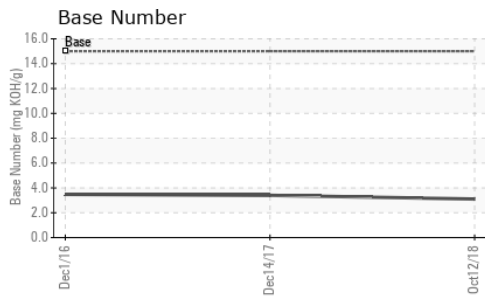

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TR04607583

Lab Number : 04607583

Unique Number : 8421603

Test Package : MOB 2

Received : 07 Dec 2018

Tested : 10 Dec 2018

Diagnosed : 10 Dec 2018 - Wes Davis

PHIL HARDER

57803 350TH STREET

MOUNTAIN LAKE, MN

US 56159

Contact: PHILIP HARDER

philbren@frontiernet.net

T: 5(07) 227-6074

F:

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)