



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[EASTERN CLEARING]
 Machine Id
JOHN DEERE 755K 1T0755KXKEE256736
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0006236	JRMC461962	JRMC447726
Sample Date		Client Info		10 May 2019	17 Aug 2018	10 May 2018
Machine Age	hrs	Client Info		2489	1653	1460
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	25	22	36
Chromium	ppm	ASTM D5185m	>11	<1	<1	1
Nickel	ppm	ASTM D5185m	>5	1	<1	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>31	8	10	14
Lead	ppm	ASTM D5185m	>26	0	<1	<1
Copper	ppm	ASTM D5185m	>26	6	28	▲ 84
Tin	ppm	ASTM D5185m	>4	1	0	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	6	6	7
Potassium	ppm	ASTM D5185m	>20	0	10	0
Fuel		WC Method	>2.1	<1.0	<1.0	0.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	10.2	9	9.
Sulfation	Abs/.1mm	*ASTM D7415	>30	23	22	22.
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	4	7	6
Boron	ppm	ASTM D5185m		163	186	132
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		236	235	256
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m		806	767	794
Calcium	ppm	ASTM D5185m		1293	1341	1318
Phosphorus	ppm	ASTM D5185m		781	755	791
Zinc	ppm	ASTM D5185m		974	987	967
Sulfur	ppm	ASTM D5185m		2284	2622	2286
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	17.3	16.
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.1	9.9	8.04
Visc @ 100°C	cSt	ASTM D445	15.4	15.1	14.49	● 10.82

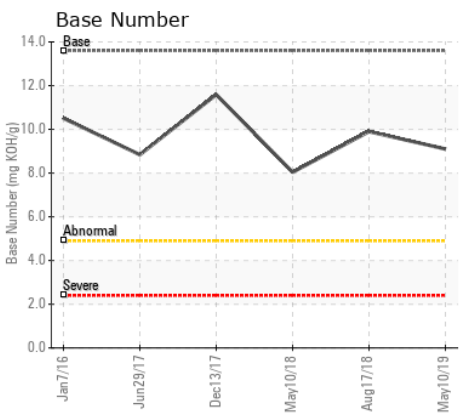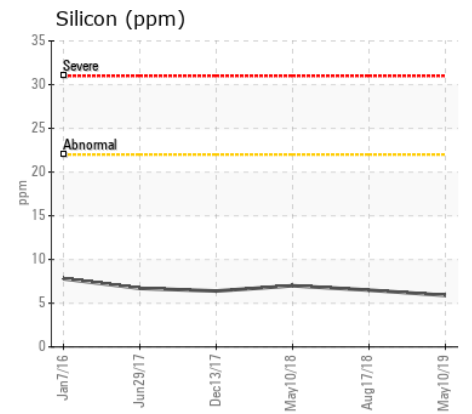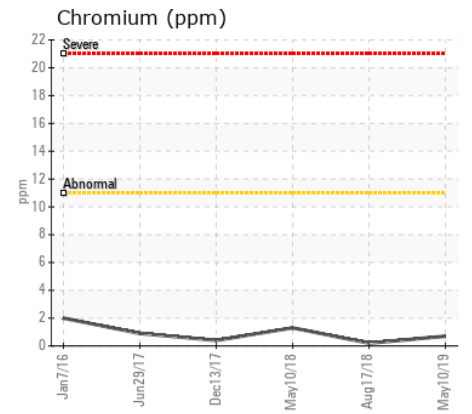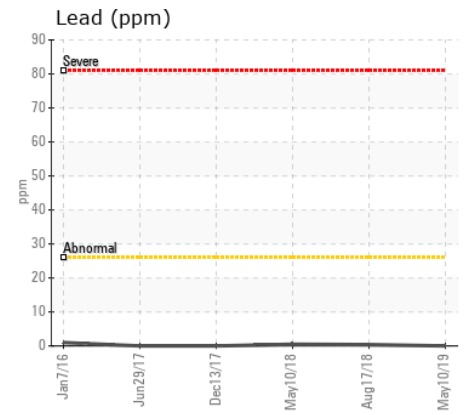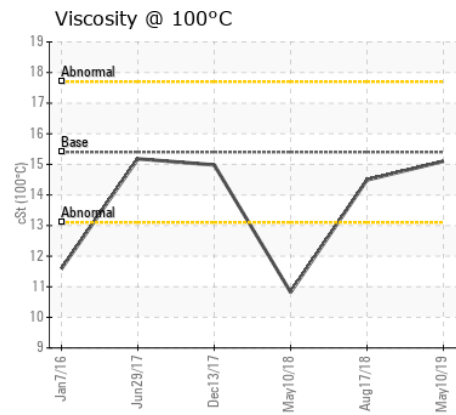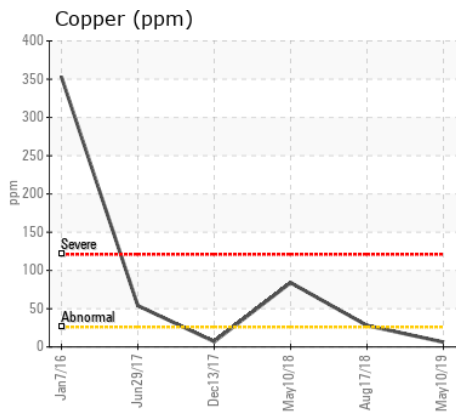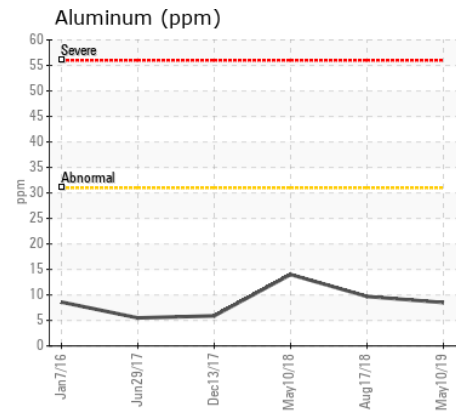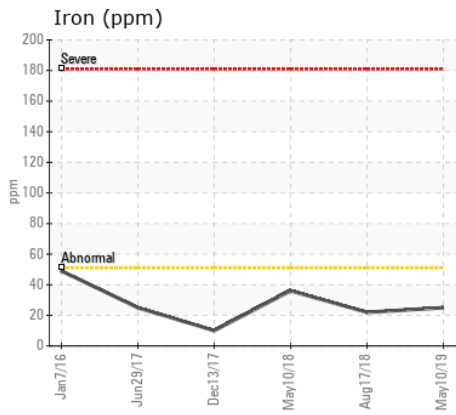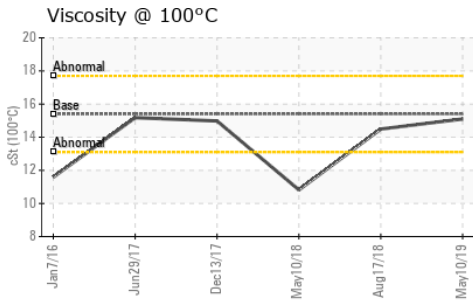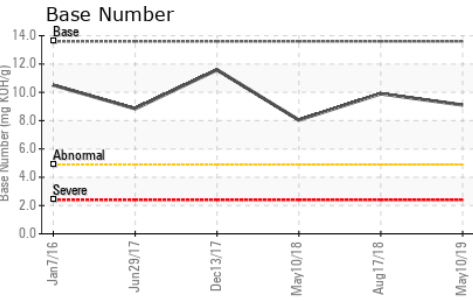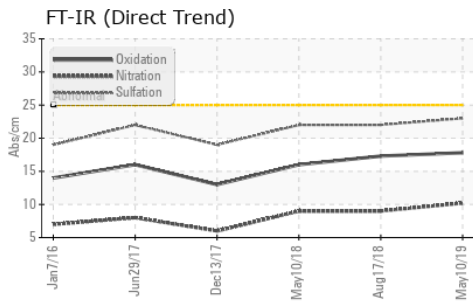

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0006236 **Received** : 13 May 2019
Lab Number : 04712586 **Tested** : 14 May 2019
Unique Number : 8594130 **Diagnosed** : 14 May 2019 - Wes Davis
Test Package : MOBCE (Additional Tests: TBN)

JRE - EDINBURG
 601 NORTH MAIN ST
 WOODSTOCK, VA
 US 22664

Contact: MIKE SECHLER
 MSECHLER@JAMESRIVEREQUIPMENT.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: