



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 2 - Beaver [ASPEN-1538]**  
Machine Id  
**JOHN DEERE 210G 1FF210GXCHF525223**  
Component  
**Hydraulic System**  
Fluid  
**HITACHI HYDRAULIC SUPER EX 46HN (63 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LECP193189</b>	LECP186596	---
Sample Date		Client Info		<b>10 May 2019</b>	12 Sep 2018	---
Machine Age	hrs	Client Info		<b>770</b>	374	---
Oil Age	hrs	Client Info		<b>770</b>	374	---
Filter Age	hrs	Client Info		<b>770</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>17</b>	12	---
Iron	ppm	ASTM D5185m	>32	<b>3</b>	3	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>28	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>2</b>	2	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>80000	<b>8922</b>	15908	---
Particles >6µm		ASTM D7647	>20000	<b>1049</b>	2269	---
Particles >14µm		ASTM D7647	>640	<b>32</b>	58	---
Particles >21µm		ASTM D7647	>160	<b>8</b>	12	---
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>20/17/12</b>	21/18/13	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>VLITE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>&lt;1</b>	<1	---
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Calcium	ppm	ASTM D5185m		<b>1</b>	2	---
Phosphorus	ppm	ASTM D5185m	827	<b>525</b>	553	---
Zinc	ppm	ASTM D5185m	0	<b>24</b>	31	---
Sulfur	ppm	ASTM D5185m	13	<b>130</b>	164	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	<b>0.104</b>	0.163	---
Visc @ 40°C	cSt	ASTM D445	47	<b>46.5</b>	46.84	---

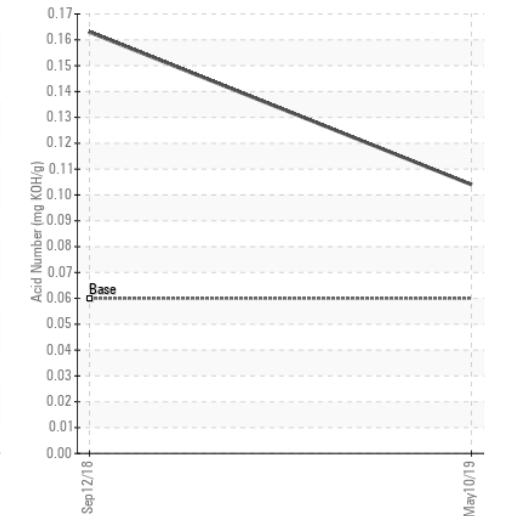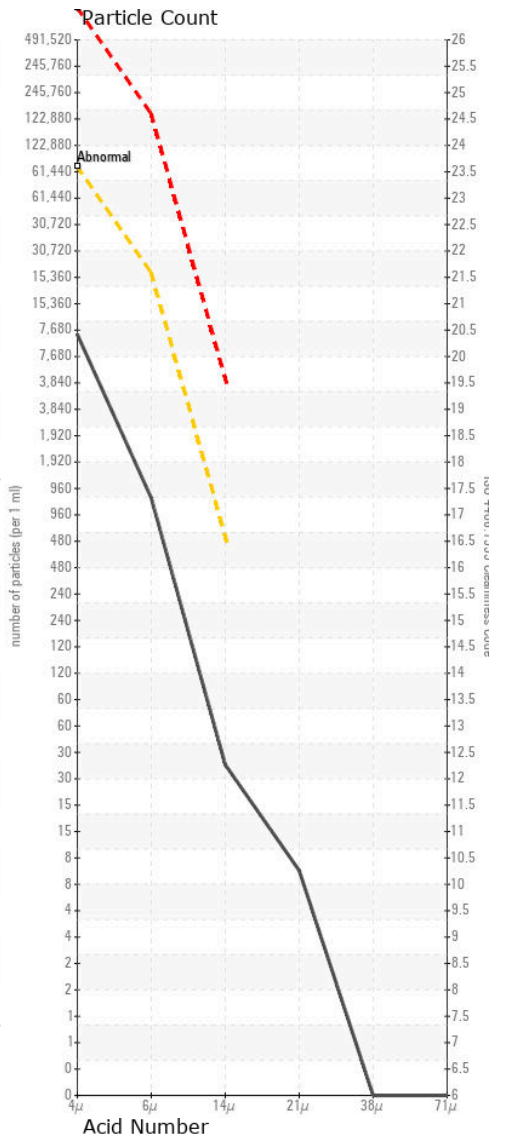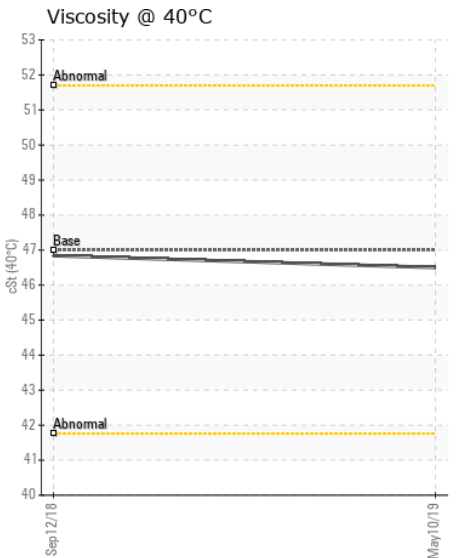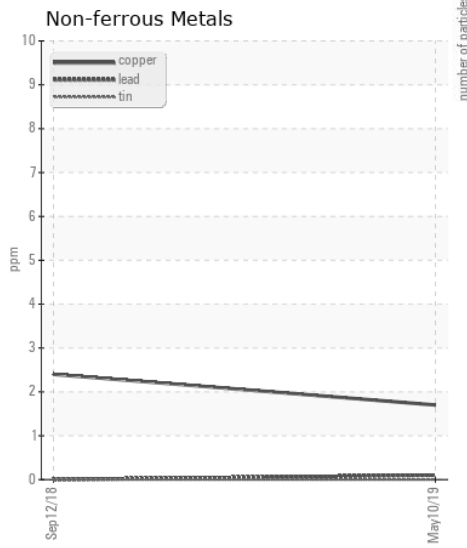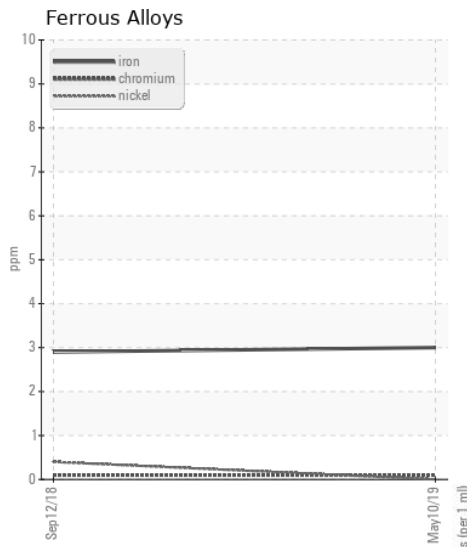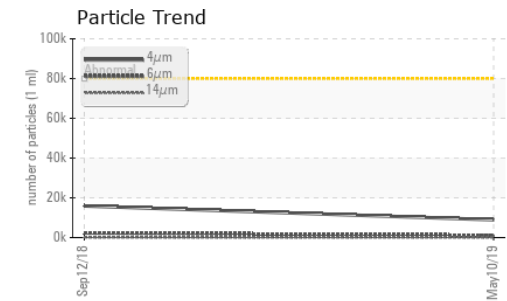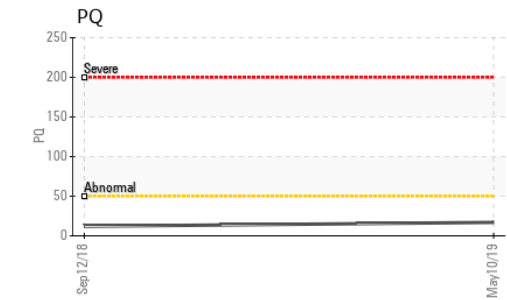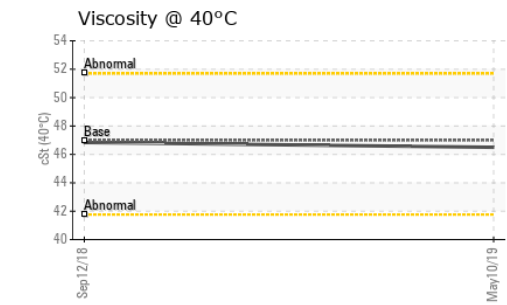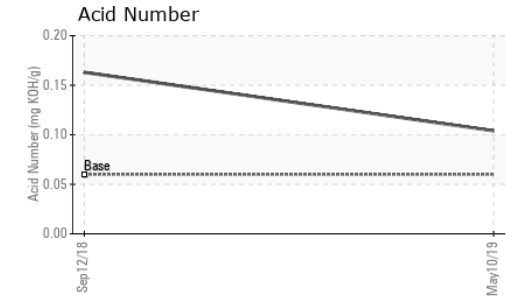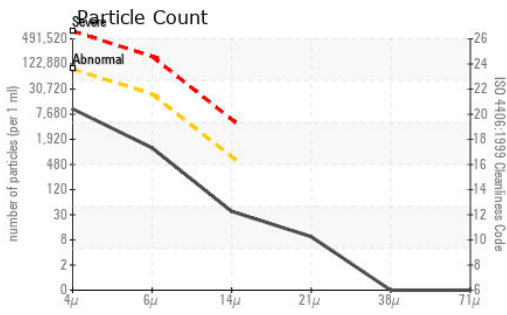

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LECP193189 **Received** : 22 May 2019  
**Lab Number** : 04718986 **Tested** : 23 May 2019  
**Unique Number** : 8605532 **Diagnosed** : 23 May 2019 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**ASPEN CORP**  
 2400 RITTER DR  
 DANIELS, WV  
 US 25832

Contact: JASON ST CLAIR  
 jstclair@aspengolf.com

T: (304)688-8753

F: