



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[53502]
Machine Id
VOLVO EC350EL 310855
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP271777	---	---
Sample Date		Client Info		12 Jun 2020	---	---
Machine Age	hrs	Client Info		1055	---	---
Oil Age	hrs	Client Info		1055	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	2	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>20	<1	---	---
Lead	ppm	ASTM D5185m	>20	<1	---	---
Copper	ppm	ASTM D5185m	>150	15	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	3	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>40000	14335	---	---
Particles >6µm		ASTM D7647	>10000	3451	---	---
Particles >14µm		ASTM D7647	>2500	378	---	---
Particles >21µm		ASTM D7647	>640	88	---	---
Particles >38µm		ASTM D7647	>160	4	---	---
Particles >71µm		ASTM D7647	>40	0	---	---
Oil Cleanliness		ISO 4406 (c)	>22/20/18	21/19/16	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	1	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	<1	---	---
Calcium	ppm	ASTM D5185m	200	95	---	---
Phosphorus	ppm	ASTM D5185m	300	374	---	---
Zinc	ppm	ASTM D5185m	370	490	---	---
Sulfur	ppm	ASTM D5185m	2500	871	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.421	---	---
Visc @ 40°C	cSt	ASTM D445	46	45.4	---	---

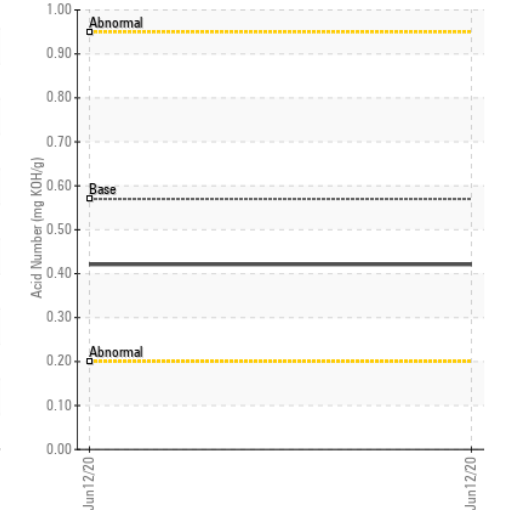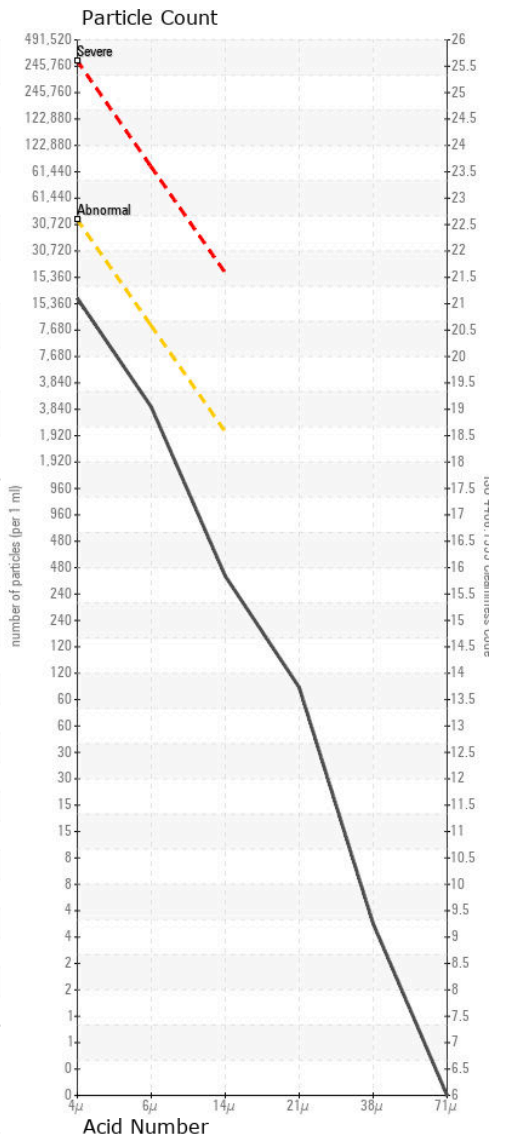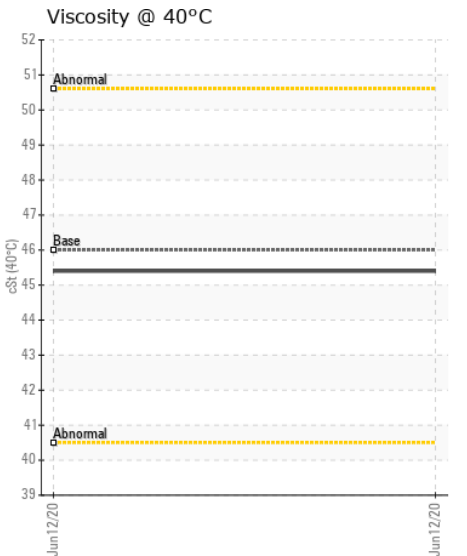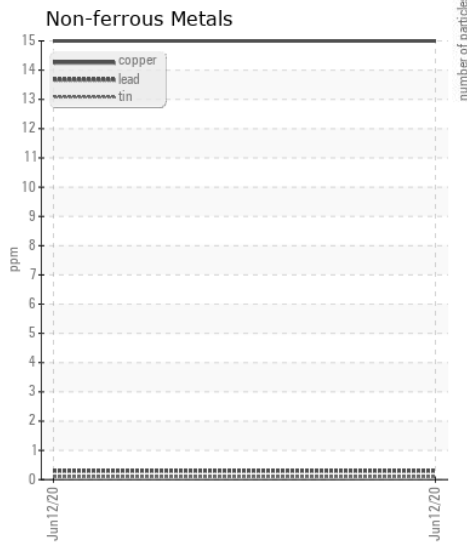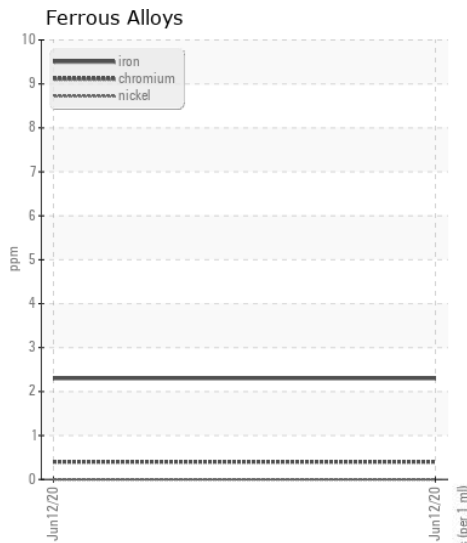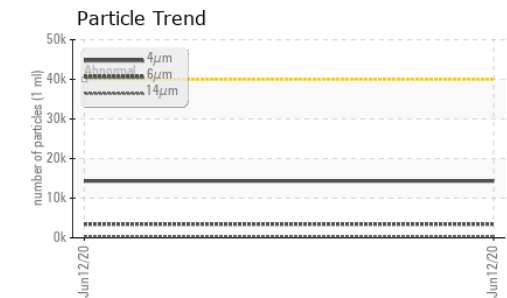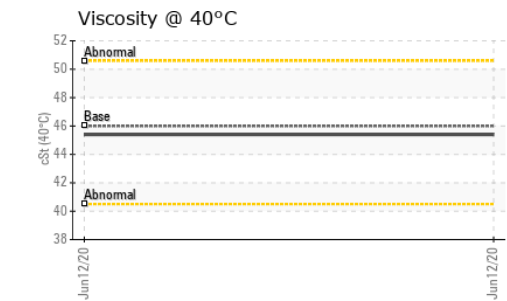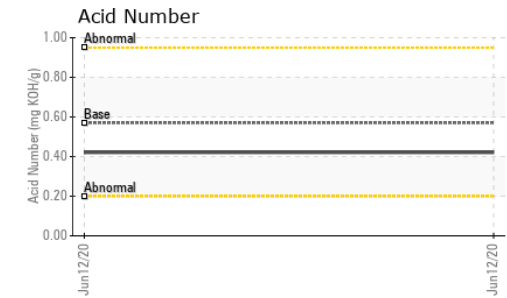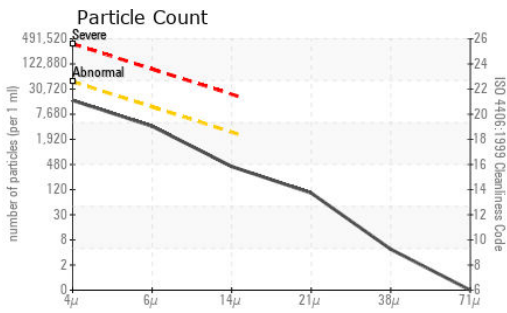

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP271777
Lab Number : 04999932
Unique Number : 9065085
Test Package : MOB 2

Received : 16 Jun 2020
Tested : 18 Jun 2020
Diagnosed : 18 Jun 2020 - Wes Davis

ALTA EQUIPMENT COMPANY
 8750 PHILIPS HWY
 JACKSONVILLE, FL
 US 32256

Contact: SHAWN NORTHCRAFT
 shawn.northcraft@altg.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (904)737-6000
 F: (904)737-1260