



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 4 - Fairmont**  
Machine Id  
**JOHN DEERE 850K 1T0850KXCDE246953**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0014005</b>	LECP141560	---
Sample Date		Client Info		<b>06 Aug 2020</b>	17 Sep 2014	---
Machine Age	hrs	Client Info		<b>5933</b>	532	---
Oil Age	hrs	Client Info		<b>2588</b>	532	---
Filter Age	hrs	Client Info		<b>2588</b>	532	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>10</b>	31	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>10</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>1</b>	5	---
Lead	ppm	ASTM D5185m	>26	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	33	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>6</b>	7	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	5	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	8.	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.3</b>	21.	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>5</b>	6	---
Boron	ppm	ASTM D5185m		<b>17</b>	136	---
Barium	ppm	ASTM D5185m		<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	196	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	3	---
Magnesium	ppm	ASTM D5185m		<b>69</b>	675	---
Calcium	ppm	ASTM D5185m		<b>2405</b>	1602	---
Phosphorus	ppm	ASTM D5185m		<b>913</b>	899	---
Zinc	ppm	ASTM D5185m		<b>992</b>	979	---
Sulfur	ppm	ASTM D5185m		<b>4608</b>	4084	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>10.6</b>	15.	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.2</b>	9.51	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	11.6	---

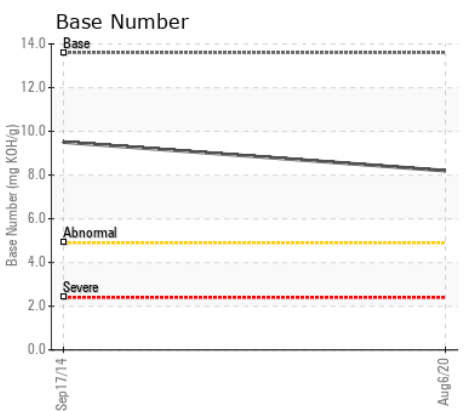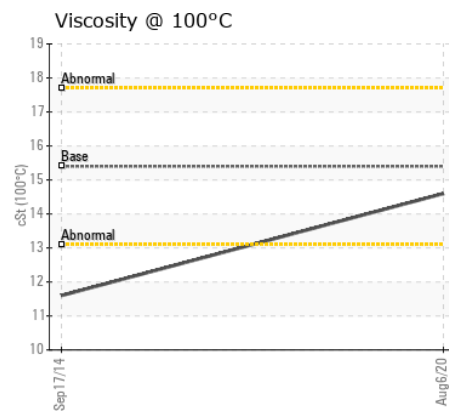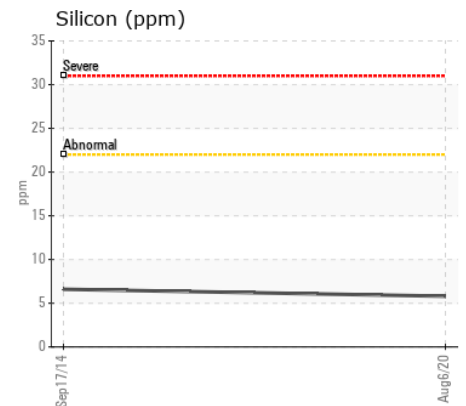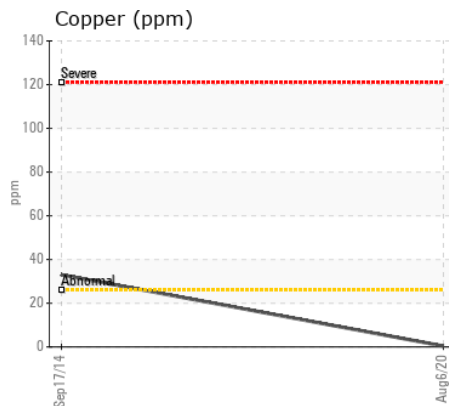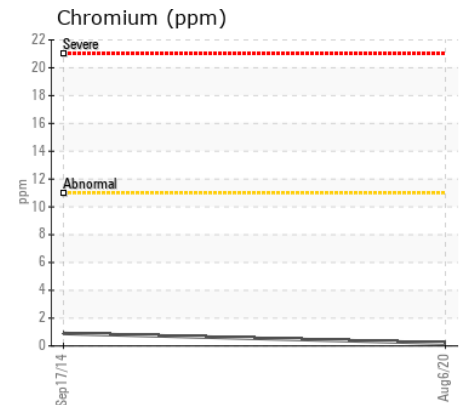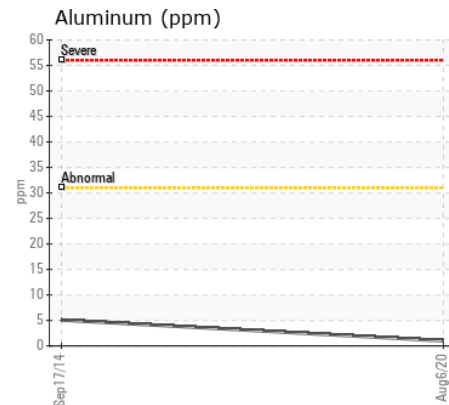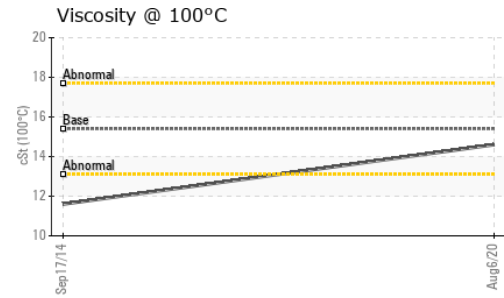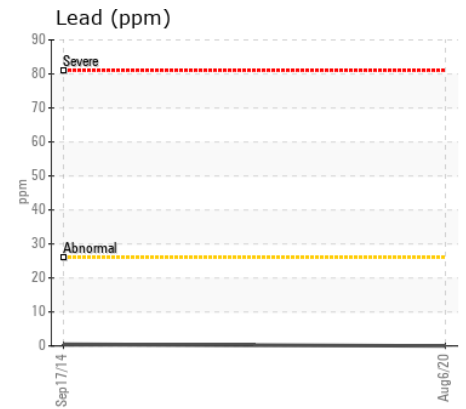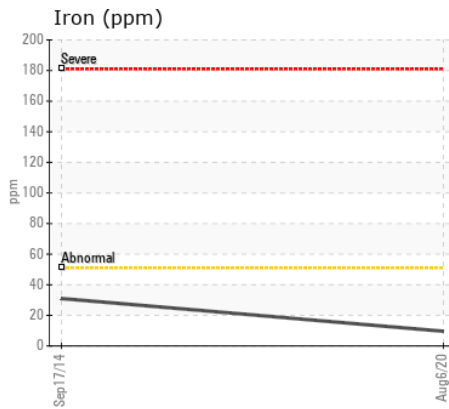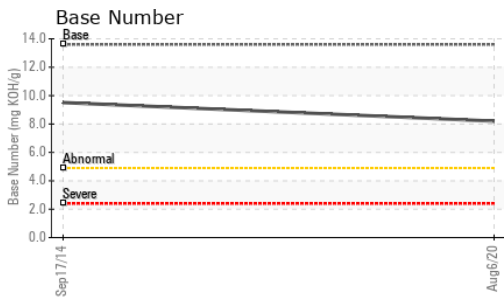

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0014005 **Received** : 10 Aug 2020  
**Lab Number** : 05040391 **Diagnosed** : 08 Jan 2024  
**Unique Number** : 9130561 **Diagnostician** : Doug Bogart  
**Test Package** : MOBCE ( Additional Tests: TBN )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)