



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[SOUTH HOLLAND]**  
 Machine Id  
**LIEBHERR LTM 1300 AT1692 - L1 (S/N 071692)**  
 Component  
**Front Left Final Drive**  
 Fluid  
**HPL DIFFERENTIAL LIFE 75W90 SYNTHETIC (1 LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>HPL010857</b>	---	---
Sample Date		Client Info		<b>06 Aug 2020</b>	---	---
Machine Age	mls	Client Info		<b>22832</b>	---	---
Oil Age	mls	Client Info		<b>7545</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>287</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m		<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>2</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>25</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Boron	ppm	ASTM D5185m		<b>26</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>6</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	---	---
Calcium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>437</b>	---	---
Zinc	ppm	ASTM D5185m		<b>27</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>25056</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.853</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>102</b>	---	---

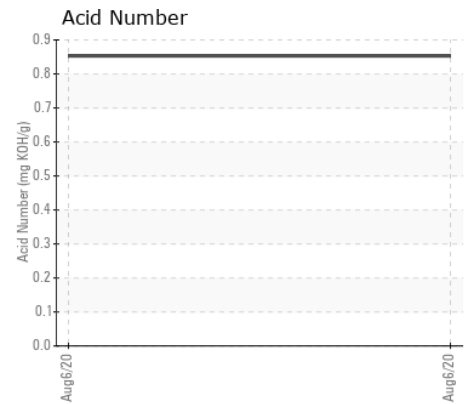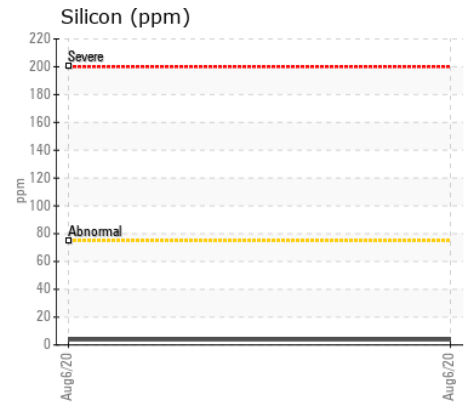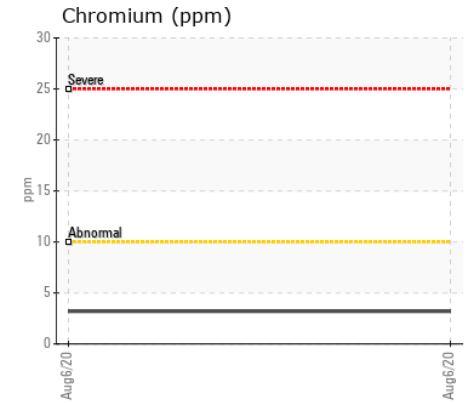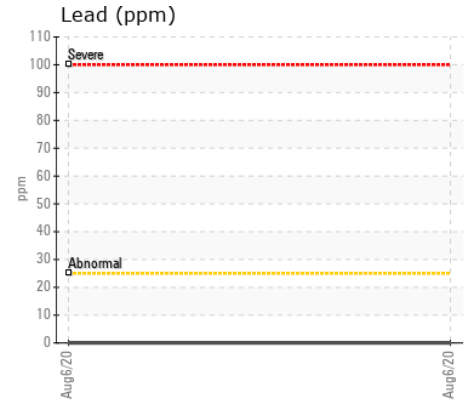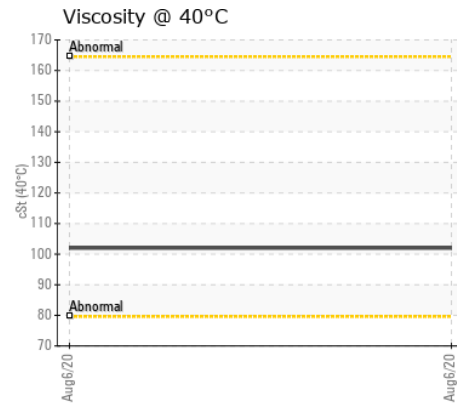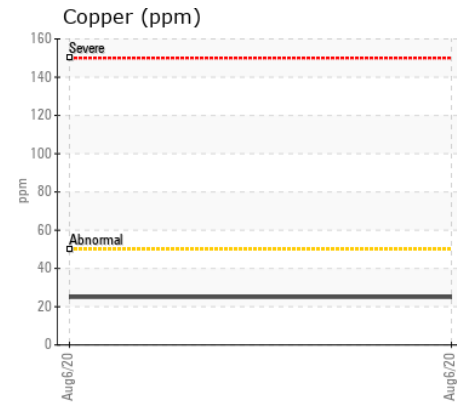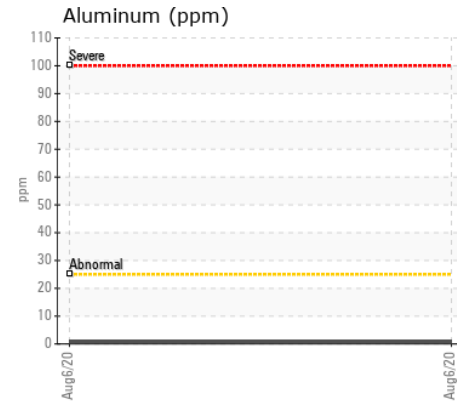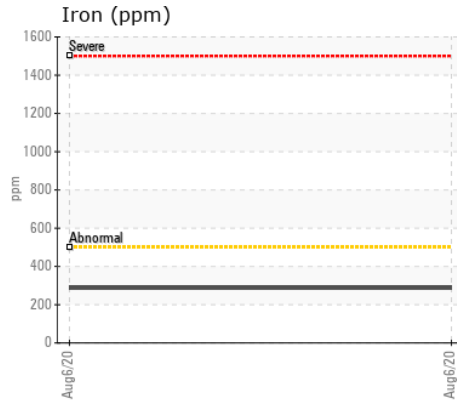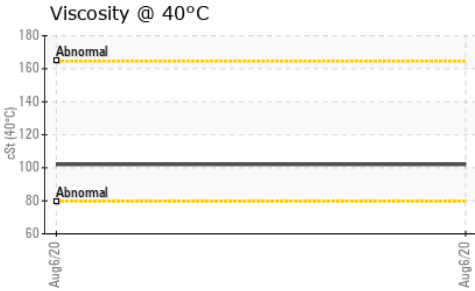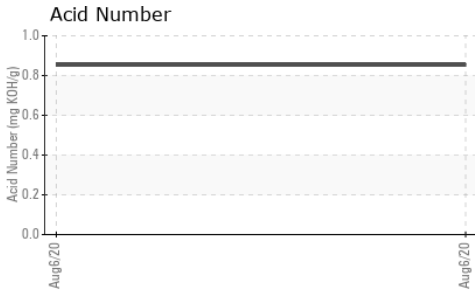

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL010857  
**Lab Number** : 05042979  
**Unique Number** : 9138150  
**Test Package** : MOB 2

**Received** : 13 Aug 2020  
**Tested** : 14 Aug 2020  
**Diagnosed** : 14 Aug 2020 - Wes Davis

**STEVENS ON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440

Contact: DAVE KOEHNE  
 davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)