



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
AG4001 (S/N 580356-1)
 Component
Gearbox
 Fluid
ARMOR PLATE ISO 100 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WCI1101567	WCI2323485	---
Sample Date		Client Info		20 Jan 2021	14 Aug 2019	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>200	11	51	---
Chromium	ppm	ASTM D5185m	>15	0	<1	---
Nickel	ppm	ASTM D5185m	>15	1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	<1	---
Lead	ppm	ASTM D5185m	>100	2	2	---
Copper	ppm	ASTM D5185m	>200	<1	<1	---
Tin	ppm	ASTM D5185m	>25	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>50	10	10	---
Potassium	ppm	ASTM D5185m	>20	8	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		1	5	---
Boron	ppm	ASTM D5185m		37	<1	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		80	<1	---
Manganese	ppm	ASTM D5185m		<1	2	---
Magnesium	ppm	ASTM D5185m		<1	1	---
Calcium	ppm	ASTM D5185m		7	6	---
Phosphorus	ppm	ASTM D5185m		349	34	---
Zinc	ppm	ASTM D5185m		44	74	---
Sulfur	ppm	ASTM D5185m		5520	473	---
Visc @ 40°C	cSt	ASTM D445		107	119	---

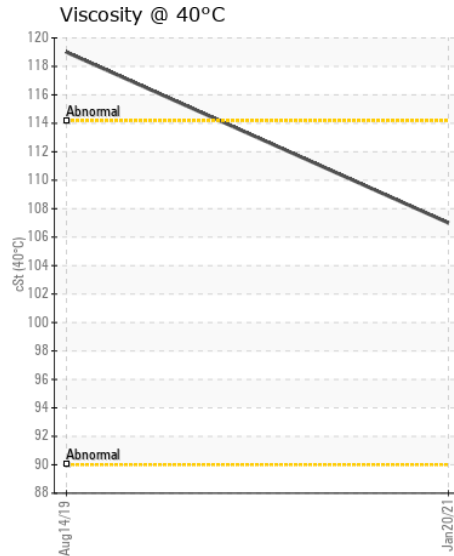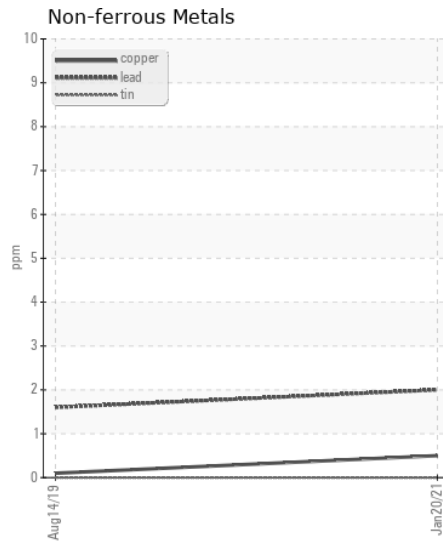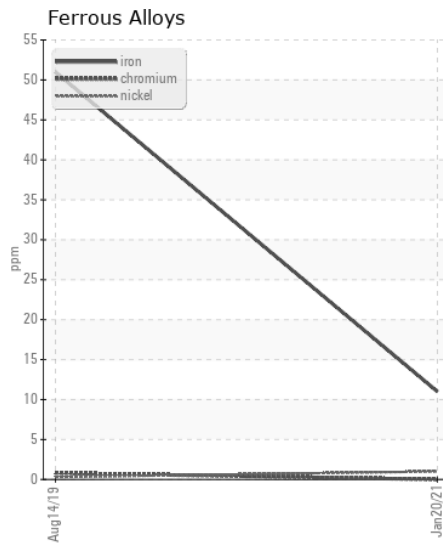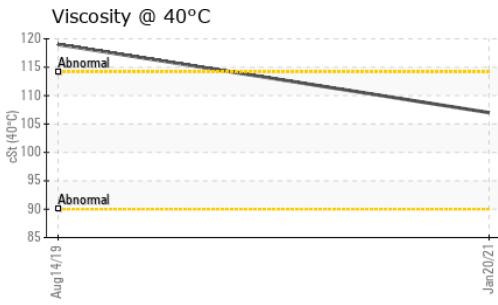

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC11101567 **Received** : 02 Feb 2021
Lab Number : 05172681 **Diagnosed** : 02 Feb 2021
Unique Number : 9347964 **Diagnostician** : Wes Davis
Test Package : IND 1

ARKEMA INC
 601 TIGHTSQUEEZE INDUSTRIAL RD
 CHATHAM, VA
 US 24531
 Contact: JODY SPARKS
 JODY.SPARKS@ARKEMA.COM
 T: (434)432-3705
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)