



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W33798]
 Machine Id
JOHN DEERE 350G 1FF350GXTLF814419
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0064580	---	---
Sample Date		Client Info		05 Feb 2021	---	---
Machine Age	hrs	Client Info		606	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	23	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>31	5	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	1	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION


The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	6	---	---
Potassium	ppm	ASTM D5185m	>20	9	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water	%	ASTM D6304	>0.21	0.109	---	---
ppm Water	ppm	ASTM D6304	>2100	1090	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.9	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	4	---	---
Boron	ppm	ASTM D5185m		132	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		240	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		743	---	---
Calcium	ppm	ASTM D5185m		1498	---	---
Phosphorus	ppm	ASTM D5185m		909	---	---
Zinc	ppm	ASTM D5185m		1018	---	---
Sulfur	ppm	ASTM D5185m		2394	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.9	---	---
Visc @ 100°C	cSt	ASTM D445		14.9	---	---

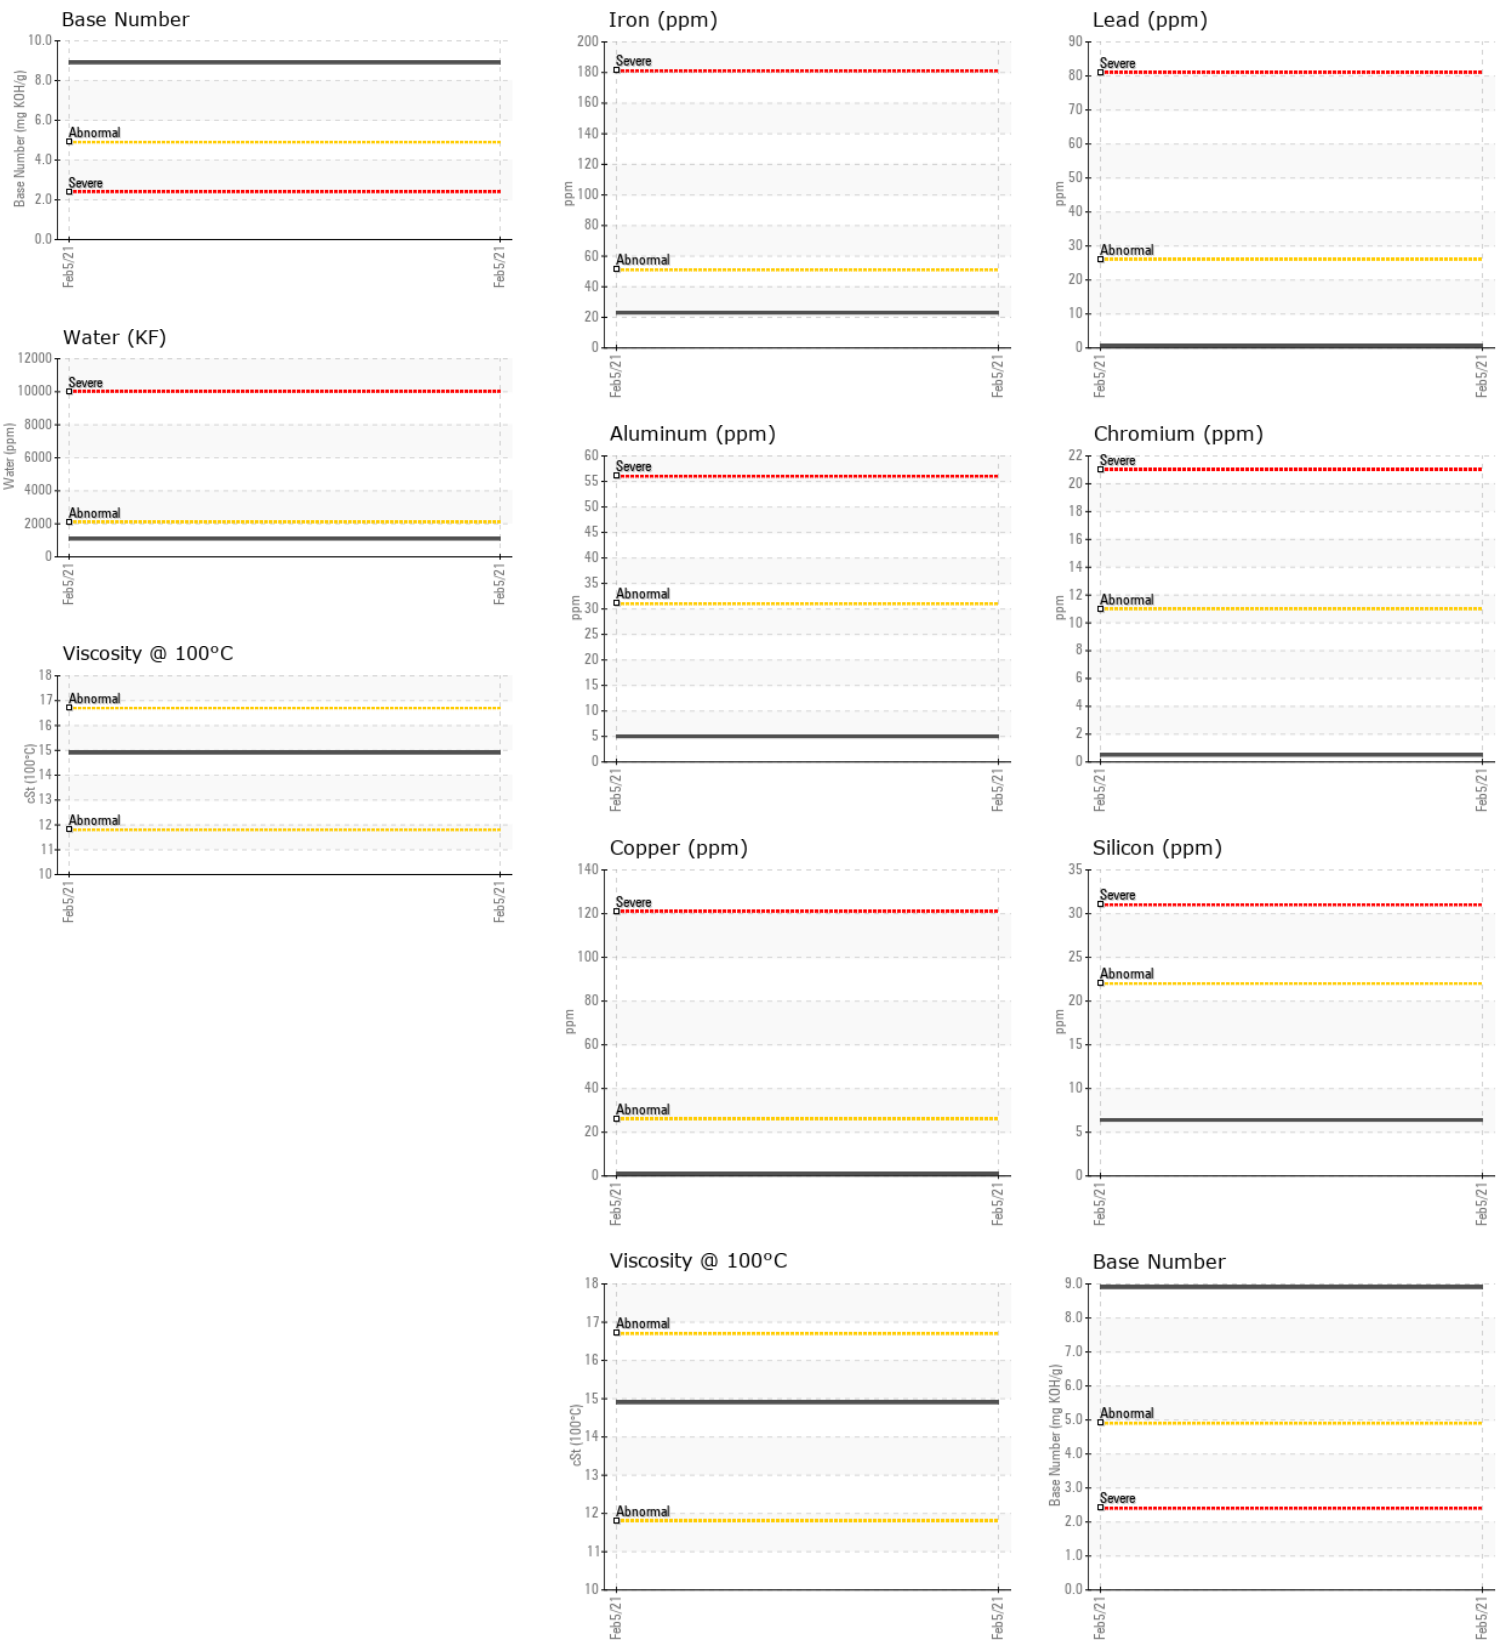

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0064580 **Received** : 15 Feb 2021
Lab Number : 05183794 **Diagnosed** : 16 Feb 2021
Unique Number : 9369083 **Diagnostician** : Wes Davis
Test Package : MOBCE (Additional Tests: KF, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198