



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 8 - Pikeville [114425]
 Machine Id
WGH0H235THAA01029
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0019530	LEC0006228	---
Sample Date		Client Info		18 Mar 2021	10 Oct 2019	---
Machine Age	hrs	Client Info		1165	539	---
Oil Age	hrs	Client Info		626	539	---
Filter Age	hrs	Client Info		626	539	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	33	38	---
Chromium	ppm	ASTM D5185m	>20	2	3	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	6	5	---
Lead	ppm	ASTM D5185m	>40	1	3	---
Copper	ppm	ASTM D5185m	>330	5	12	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	24	---
Potassium	ppm	ASTM D5185m	>20	2	3	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	9.3	7.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.5	19.6	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		10	4	---
Boron	ppm	ASTM D5185m	250	188	58	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	231	51	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m	450	750	473	---
Calcium	ppm	ASTM D5185m	3000	1406	1639	---
Phosphorus	ppm	ASTM D5185m	1150	877	984	---
Zinc	ppm	ASTM D5185m	1350	1097	1166	---
Sulfur	ppm	ASTM D5185m	4250	2717	3206	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.1	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	10	8.2	---
Visc @ 100°C	cSt	ASTM D445	10.9	13.0	12.2	---

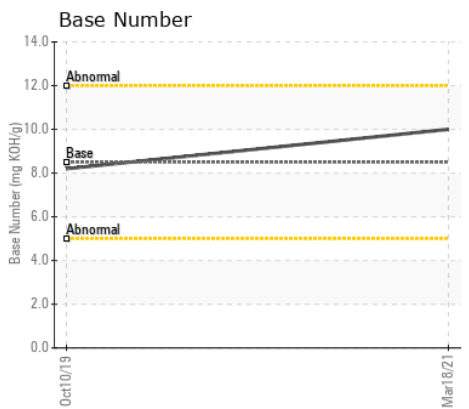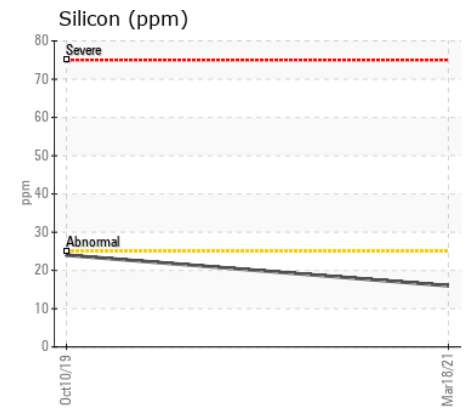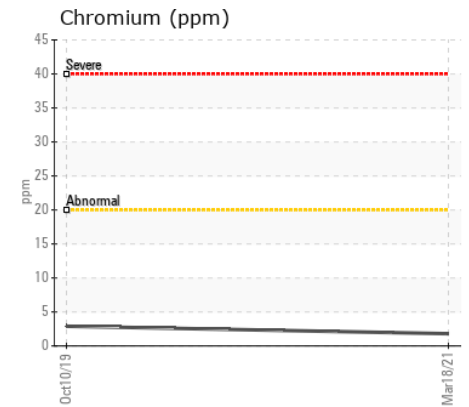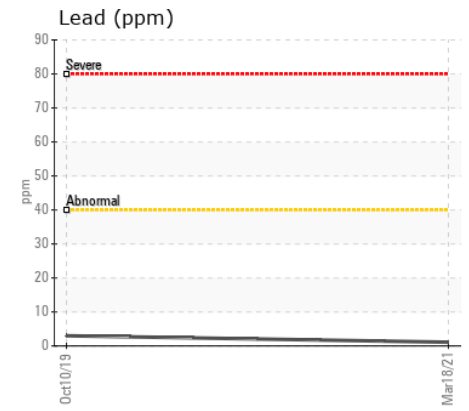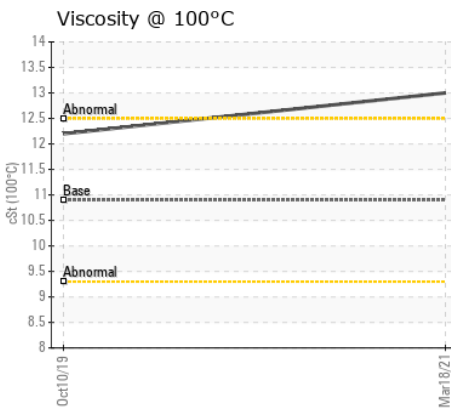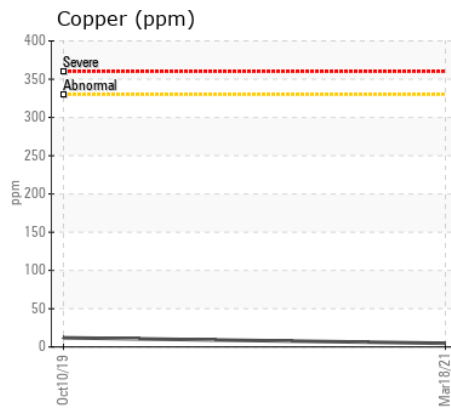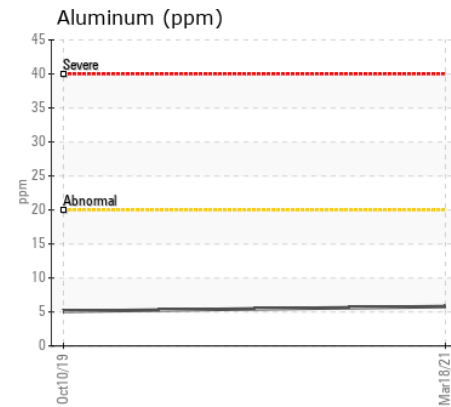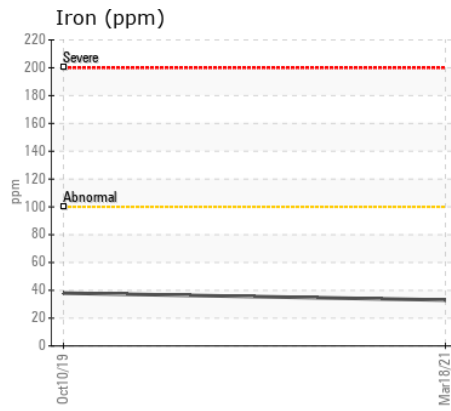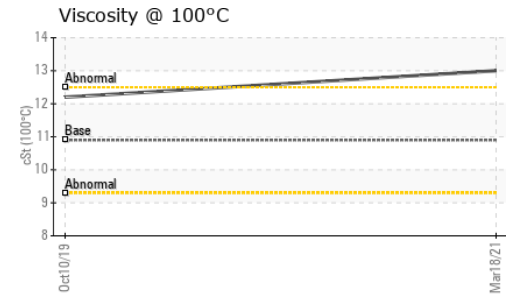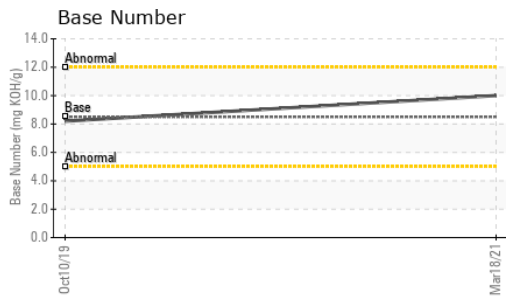

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0019530 **Received** : 23 Mar 2021
Lab Number : 05211416 **Diagnosed** : 26 Mar 2021
Unique Number : 9435309 **Diagnostician** : Jonathan Hester
Test Package : MOBCE (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570