



# OIL ANALYSIS REPORT

WEAR	<b>SEVERE</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Store 4 - Fairmont**  
Machine Id  
**PRINOTH T12 935300140**  
Component  
**Right Final Drive**  
Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

## RECOMMENDATION

The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0013714</b>	LEC0000476	---
Sample Date		Client Info		<b>15 Jun 2021</b>	20 Feb 2019	---
Machine Age	hrs	Client Info		<b>1670</b>	433	---
Oil Age	hrs	Client Info		<b>1237</b>	433	---
Filter Age	hrs	Client Info		<b>0</b>	433	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Not Changd	---
Sample Status				<b>SEVERE</b>	ABNORMAL	---

## WEAR

Gear wear is indicated. Bearing and/or bushing wear is indicated.

PQ		ASTM D8184		<b>63</b>	500	---
Iron	ppm	ASTM D5185m	>500	<b>▲ 1421</b>	348	---
Chromium	ppm	ASTM D5185m	>10	<b>▲ 20</b>	4	---
Nickel	ppm	ASTM D5185m		<b>2</b>	0	---
Titanium	ppm	ASTM D5185m		<b>6</b>	11	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>12</b>	9	---
Lead	ppm	ASTM D5185m	>25	<b>▲ 139</b>	<b>▲ 206</b>	---
Copper	ppm	ASTM D5185m	>50	<b>▲ 1444</b>	41	---
Tin	ppm	ASTM D5185m	>10	<b>▲ 22</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	HEAVY	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION













No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>31</b>	32	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185m		<b>9</b>	16	---
Boron	ppm	ASTM D5185m		<b>16</b>	14	---
Barium	ppm	ASTM D5185m		<b>20</b>	81	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	0	---
Manganese	ppm	ASTM D5185m		<b>8</b>	3	---
Magnesium	ppm	ASTM D5185m		<b>8</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>64</b>	8	---
Phosphorus	ppm	ASTM D5185m		<b>318</b>	337	---
Zinc	ppm	ASTM D5185m		<b>59</b>	14	---
Sulfur	ppm	ASTM D5185m		<b>10542</b>	4804	---
Visc @ 40°C	cSt	ASTM D445		<b>141</b>	210.7	---

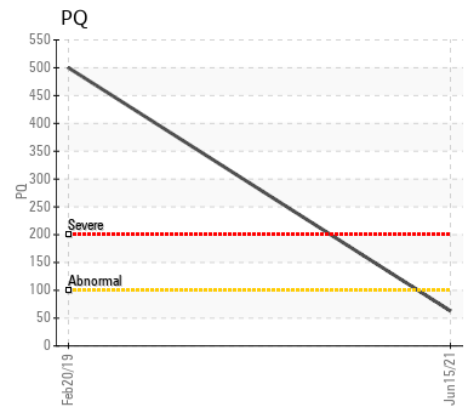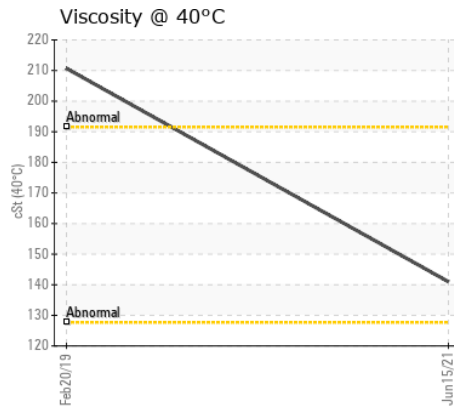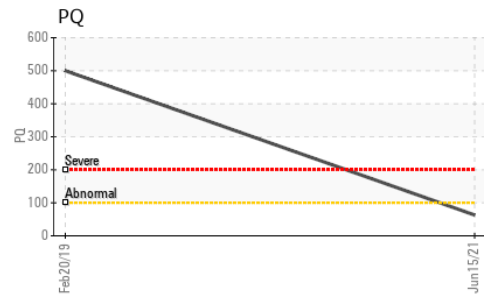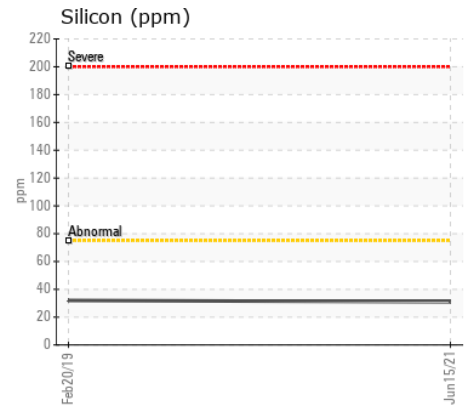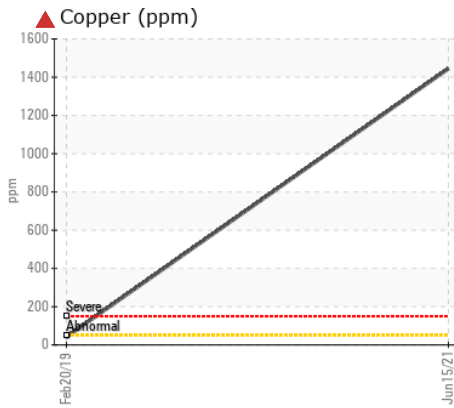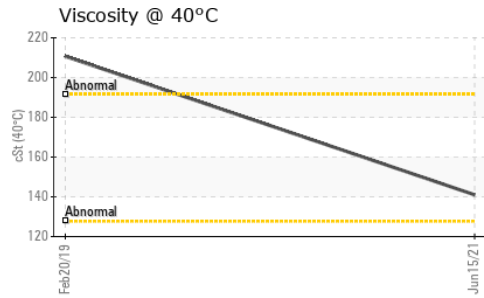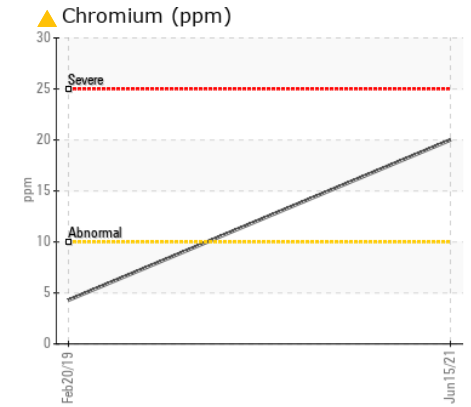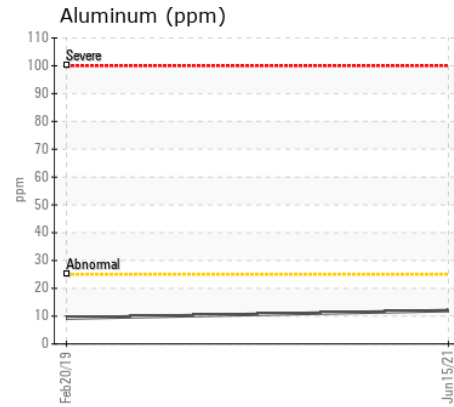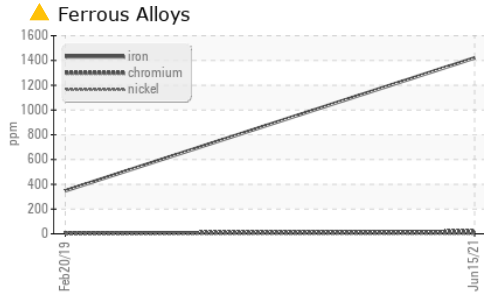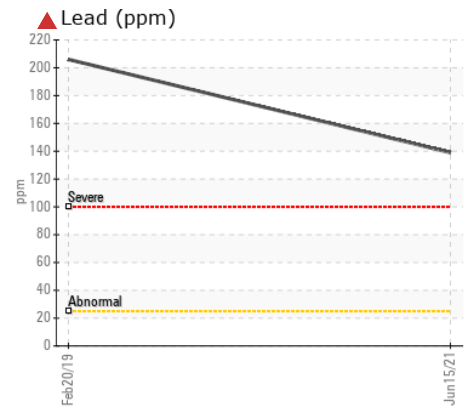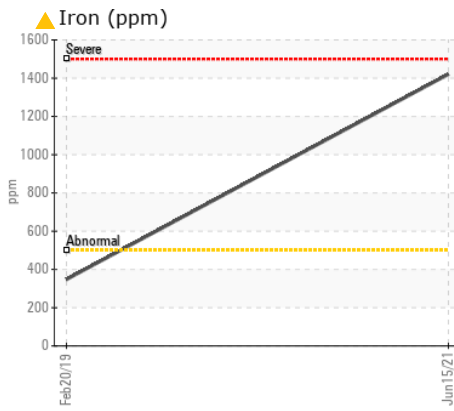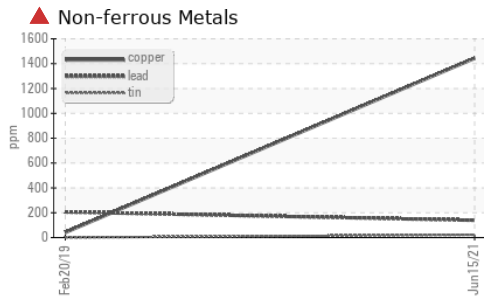

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0013714 **Received** : 17 Jun 2021  
**Lab Number** : 05282437 **Tested** : 21 Jun 2021  
**Unique Number** : 9551375 **Diagnosed** : 21 Jun 2021 - Don Baldrige  
**Test Package** : MOBCE ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (740)373-5570