



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W10037]**  
 Machine Id  
**JOHN DEERE 180G 1FF180GXEJF020853**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**GEAR OIL SAE 80 (--- GAL)**

## RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0110216</b>	---	---
Sample Date		Client Info		<b>21 Dec 2021</b>	---	---
Machine Age	hrs	Client Info		<b>1949</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

## WEAR

Gear wear is indicated.

PQ		ASTM D8184	>1250	<b>1105</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>▲ 2351</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>▲ 25</b>	---	---
Nickel	ppm	ASTM D5185m		<b>4</b>	---	---
Titanium	ppm	ASTM D5185m		<b>8</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>● 89</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>5</b>	---	---
Tin	ppm	ASTM D5185m		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION














Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	<b>▲ 461</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>13</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

## FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	400	<b>58</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>24</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>8</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>112</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>465</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>48</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>15138</b>	---	---
Visc @ 40°C	cSt	ASTM D445	74	<b>197</b>	---	---

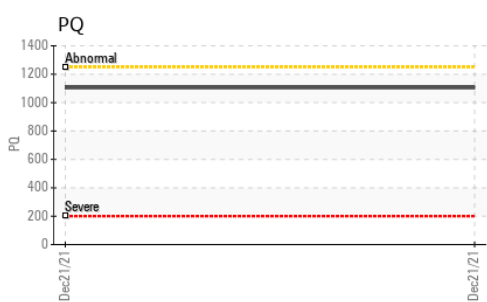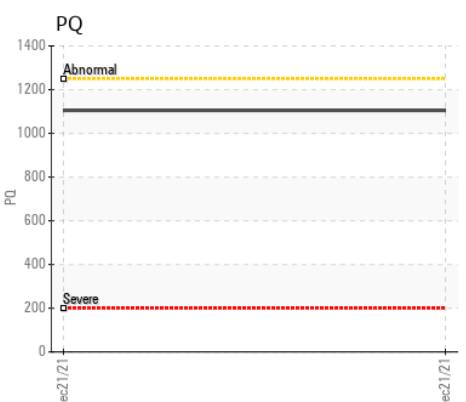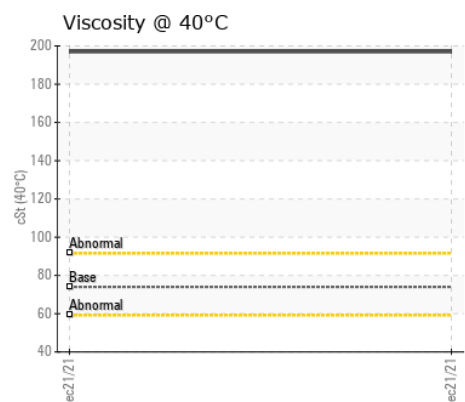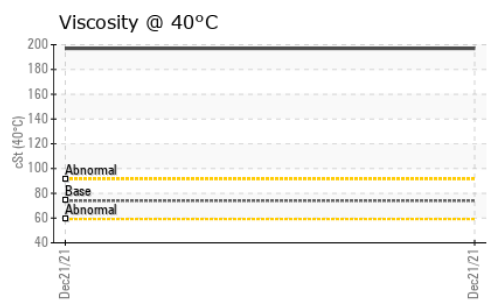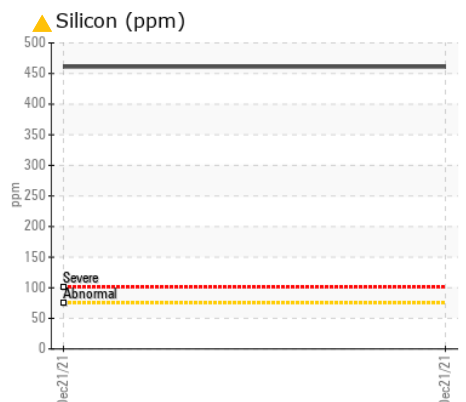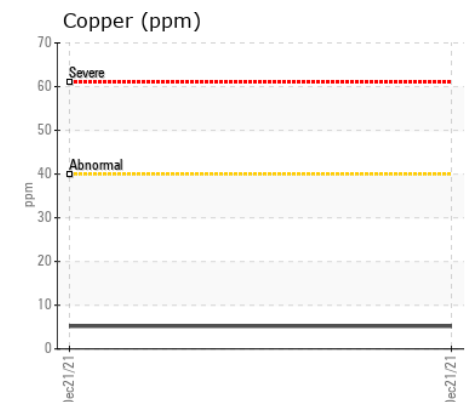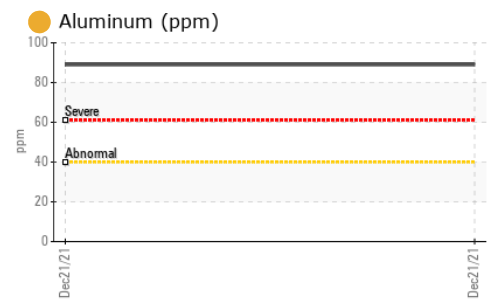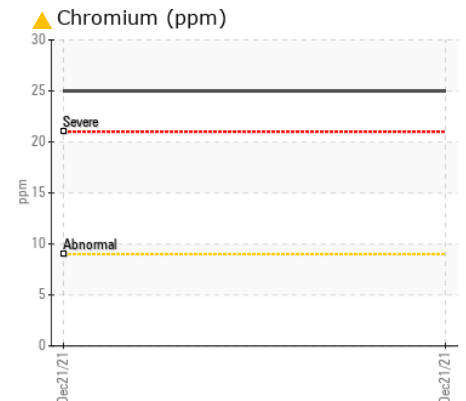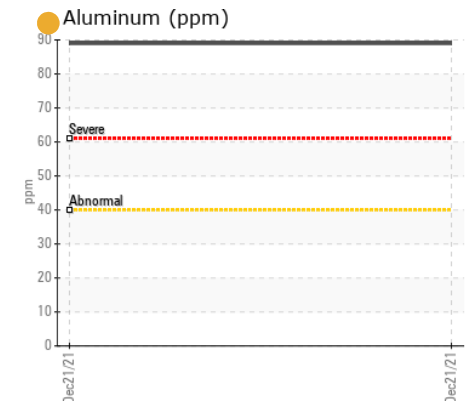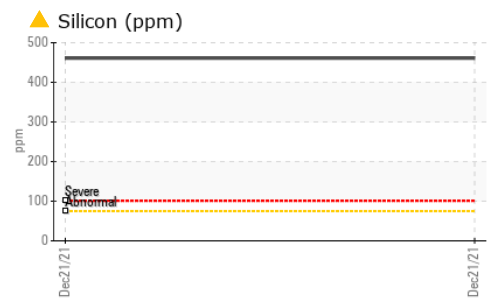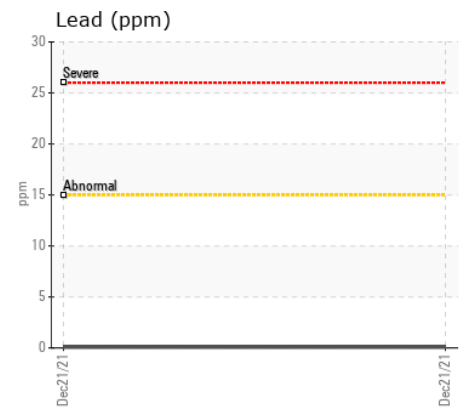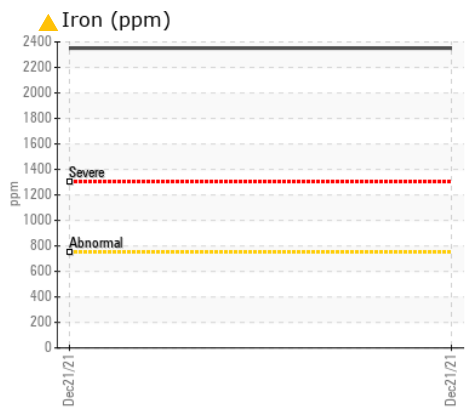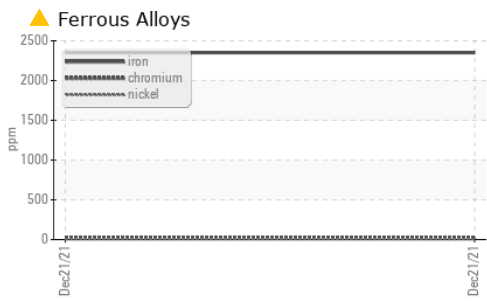

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0110216 **Received** : 22 Dec 2021  
**Lab Number** : 05430025 **Tested** : 27 Dec 2021  
**Unique Number** : 9789217 **Diagnosed** : 27 Dec 2021 - Don Baldrige  
**Test Package** : MOBCE ( Additional Tests: PQ )

**JRE - CASTLE HAYNE**  
 113 CROWATAN ROAD  
 CASTLE HAYNE, NC  
 US 28429-5819  
 Contact: MARC BAKER  
 marc.baker@jamesriverequipment.com  
 T: (910)675-9211  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)