



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 2015 EXP
 Component
Gasoline Engine
 Fluid
TRC PRO-SPEC MULTI-VIS SB 5W20 (6 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR05441600	TR05027064	TR04784215
Sample Date		Client Info		17 Jun 2021	13 Apr 2020	15 Jul 2019
Machine Age	mls	Client Info		80053	71682	62153
Oil Age	mls	Client Info		8371	9529	9715
Filter Age	mls	Client Info		8371	9529	9715
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	13	18	20
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>40	3	6	8
Lead	ppm	ASTM D5185m	>50	<1	<1	0
Copper	ppm	ASTM D5185m	>155	15	12	17
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	10	9	13
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	12.9	13.2	13.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.4	24.6	24.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	3	4	7
Boron	ppm	ASTM D5185m		19	17	28
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		155	117	138
Manganese	ppm	ASTM D5185m		5	6	8
Magnesium	ppm	ASTM D5185m		14	19	48
Calcium	ppm	ASTM D5185m	4200	1994	1628	1863
Phosphorus	ppm	ASTM D5185m	800	655	510	574
Zinc	ppm	ASTM D5185m	800	809	612	761
Sulfur	ppm	ASTM D5185m		2038	1303	1689
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.1	21	21.3
Base Number (BN)	mg KOH/g	ASTM D2896	15	4.90	3.87	3.87
Visc @ 100°C	cSt	ASTM D445	8.5	8.8	7.3	8.14

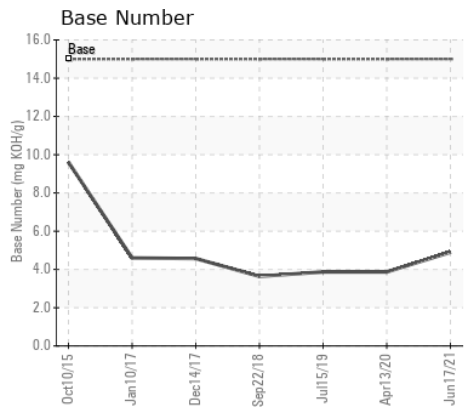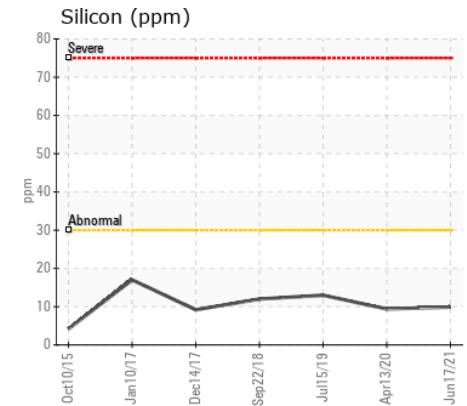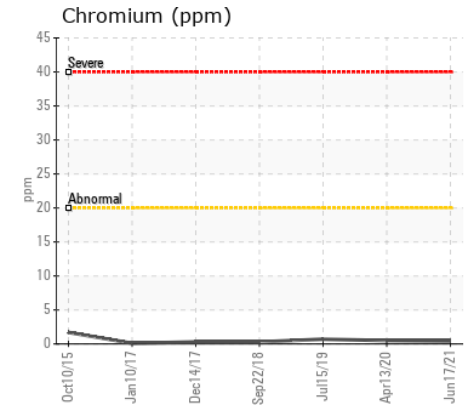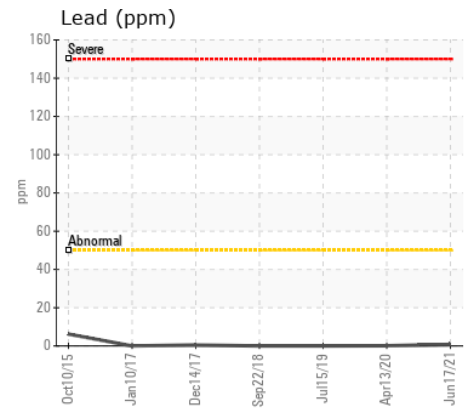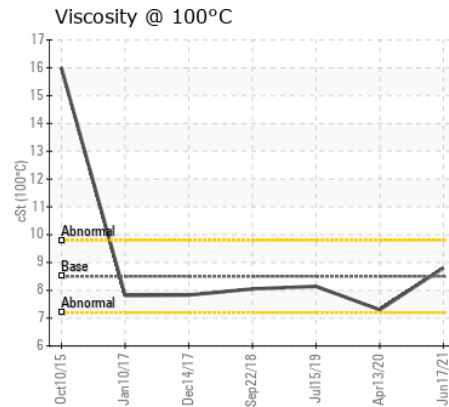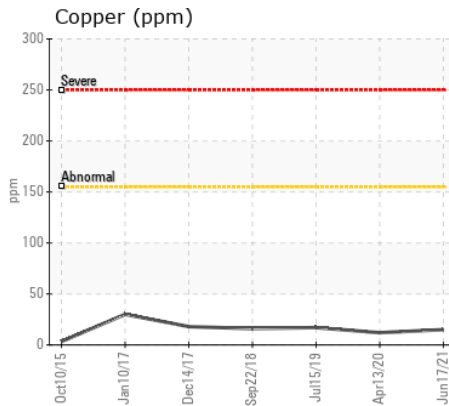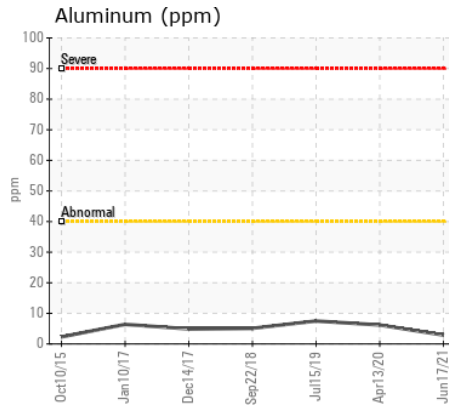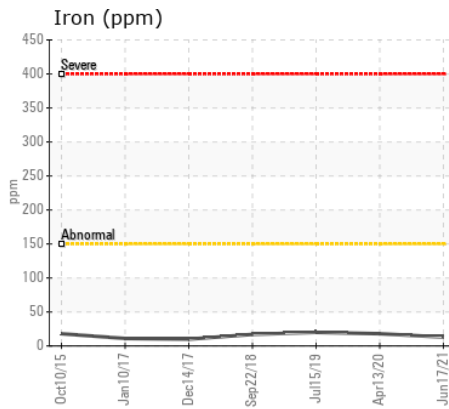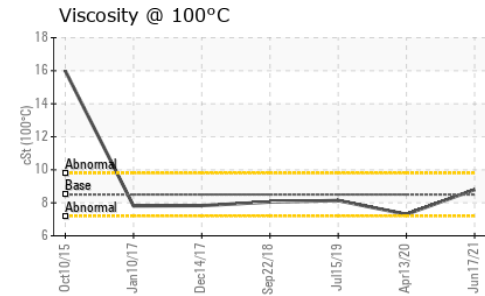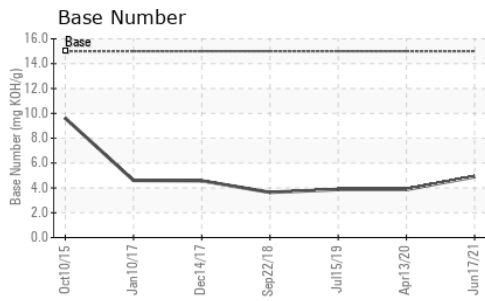

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR05441600
Lab Number : 05441600
Unique Number : 9805793
Test Package : MOB 2
Received : 11 Jan 2022
Tested : 12 Jan 2022
Diagnosed : 12 Jan 2022 - Wes Davis

PHIL HARDER
 57803 350TH STREET
 MOUNTAIN LAKE, MN
 US 56159
 Contact: PHILIP HARDER
 philbren@frontiernet.net
 T: 5(07) 227-6074
 F:

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)