



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
BEALETON
 Machine Id
JOHN DEERE 944K M02-0913 1DW944KXKML703638
 Component
Transmission
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0122956	---	---
Sample Date		Client Info		04 Mar 2022	---	---
Machine Age	hrs	Client Info		277	---	---
Oil Age	hrs	Client Info		277	---	---
Filter Age	hrs	Client Info		277	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	21	---	---
Iron	ppm	ASTM D5185m	>200	4	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>7	0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>45	<1	---	---
Copper	ppm	ASTM D5185m	>225	<1	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>125	7	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m	6	7	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	145	96	---	---
Calcium	ppm	ASTM D5185m	3570	3527	---	---
Phosphorus	ppm	ASTM D5185m	1290	1022	---	---
Zinc	ppm	ASTM D5185m	1640	1237	---	---
Sulfur	ppm	ASTM D5185m		3011	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	51.5	---	---

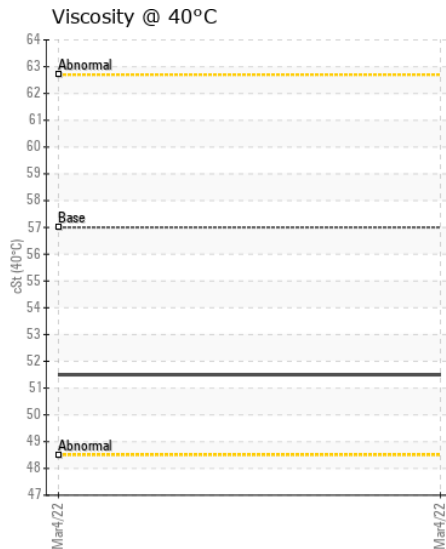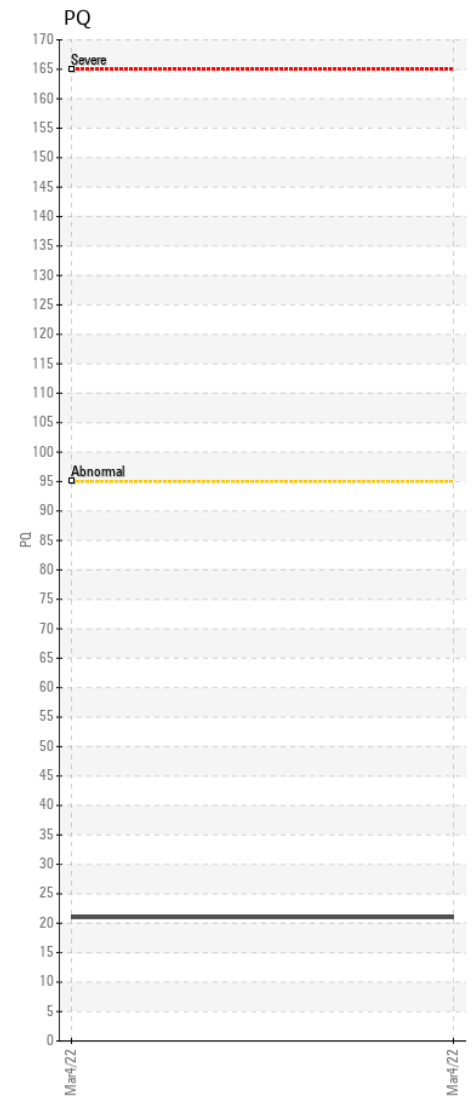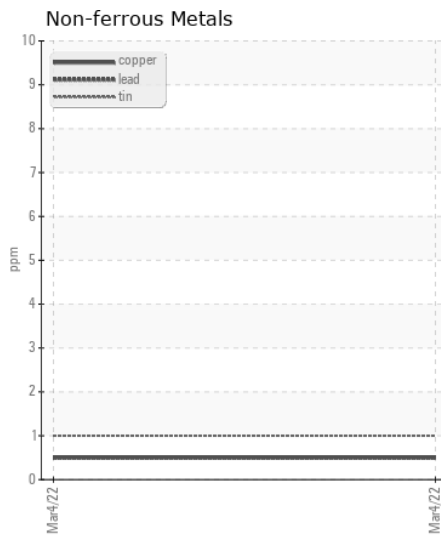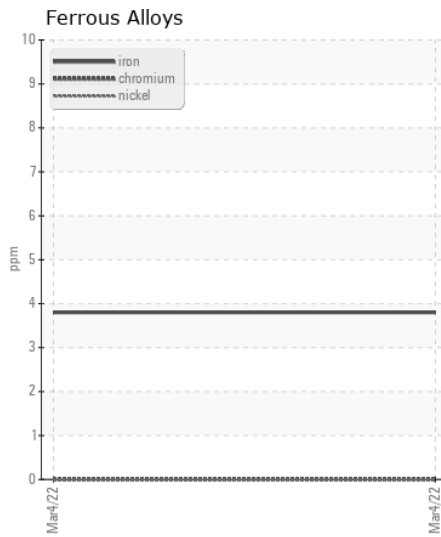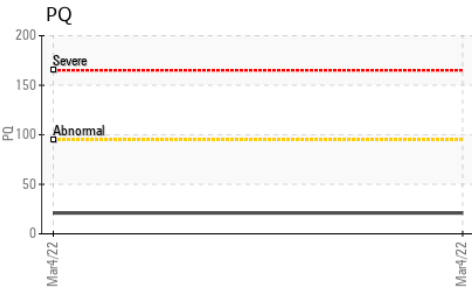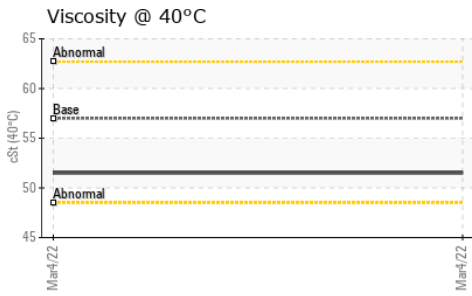

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0122956 **Received** : 08 Mar 2022
Lab Number : 05486995 **Tested** : 10 Mar 2022
Unique Number : 9881214 **Diagnosed** : 10 Mar 2022 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LUCK STONE - MILFORD
 19380 RICHMOND TURNPIKE
 MILFORD, VA
 US 22514

Contact: BRYAN MORRIS
 bmorris@luckstone.com

T: (804)400-3630

F: x: