



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W31976]

Machine Id

JOHN DEERE 325G

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 0W40 (13 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0122962	---	---
Sample Date		Client Info		28 Mar 2022	---	---
Machine Age	hrs	Client Info		974	---	---
Oil Age	hrs	Client Info		974	---	---
Filter Age	hrs	Client Info		974	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>51	64	---	---
Chromium	ppm	ASTM D5185m	>11	2	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>31	9	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	29	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	19	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.8	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	11	---	---
Boron	ppm	ASTM D5185m		145	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		218	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		805	---	---
Calcium	ppm	ASTM D5185m		1576	---	---
Phosphorus	ppm	ASTM D5185m		931	---	---
Zinc	ppm	ASTM D5185m		1154	---	---
Sulfur	ppm	ASTM D5185m		2202	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	9.7	---	---
Visc @ 100°C	cSt	ASTM D445	14	15.1	---	---

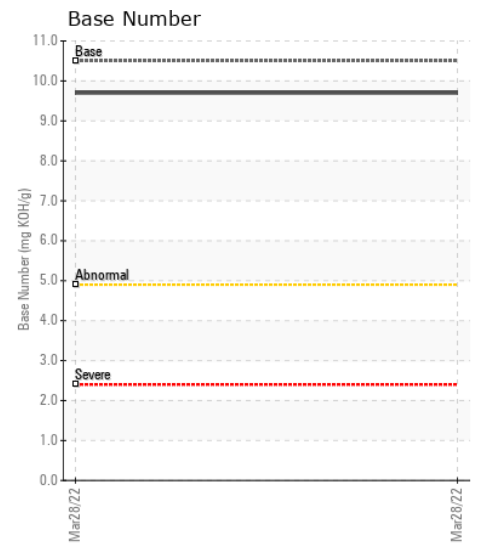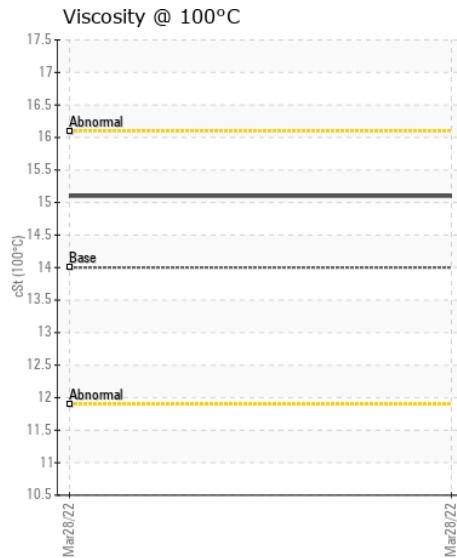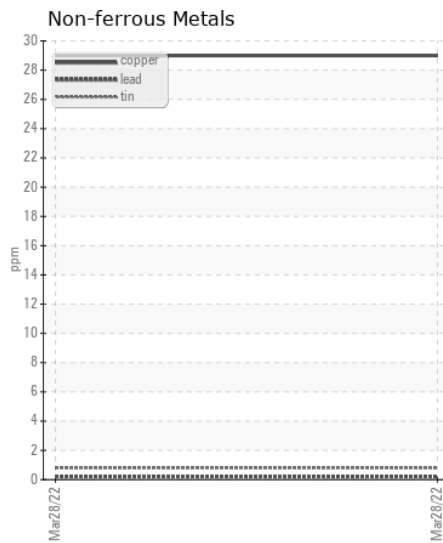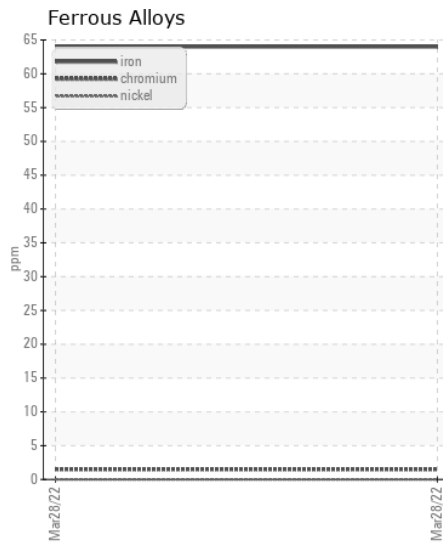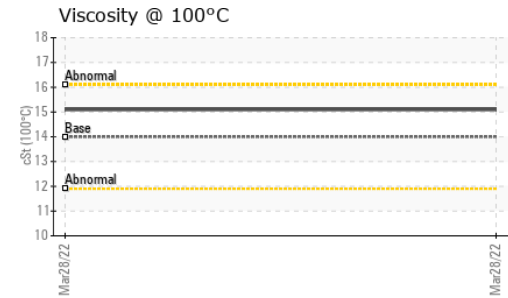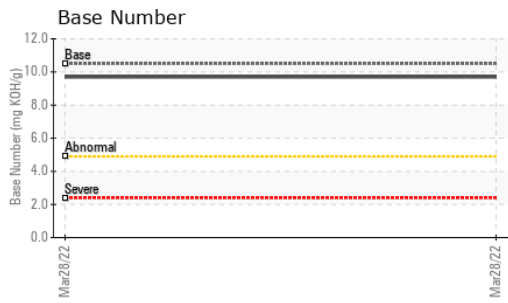

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0122962 **Recieved** : 30 Mar 2022
Lab Number : 05506129 **Diagnosed** : 31 Mar 2022
Unique Number : 9915403 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ALLSITE CONTRACTING
 11128 INDUSTRIAL RD
 MANASSAS, VA
 US 20109
 Contact: DAVE PARKER
 dave.parker@allsiteco.com
 T: (703)361-2499
 F: (703)361-6169