



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 824K 1DW824KXVJF687635
Component
Brake
Fluid
JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0097916	---	---
Sample Date		Client Info		06 Apr 2022	---	---
Machine Age	hrs	Client Info		6564	---	---
Oil Age	hrs	Client Info		564	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		12	---	---
Iron	ppm	ASTM D5185m	>350	14	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>8	<1	---	---
Lead	ppm	ASTM D5185m	>10	4	---	---
Copper	ppm	ASTM D5185m	>150	5	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>400	3	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		12	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		93	---	---
Calcium	ppm	ASTM D5185m		3552	---	---
Phosphorus	ppm	ASTM D5185m		1068	---	---
Zinc	ppm	ASTM D5185m		1308	---	---
Sulfur	ppm	ASTM D5185m		3087	---	---
Visc @ 40°C	cSt	ASTM D445	59	53.0	---	---

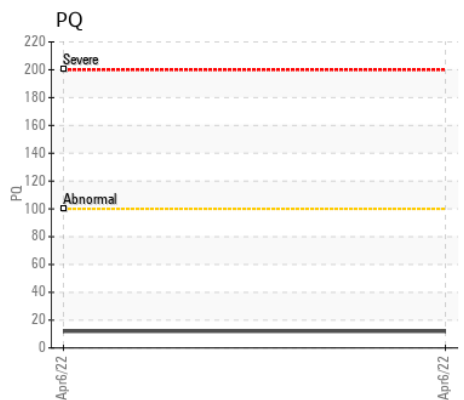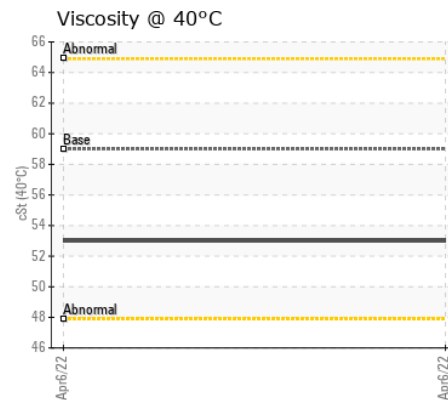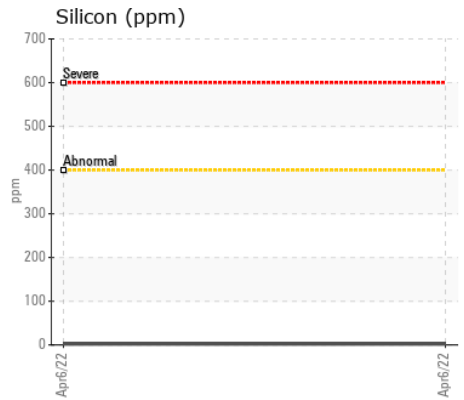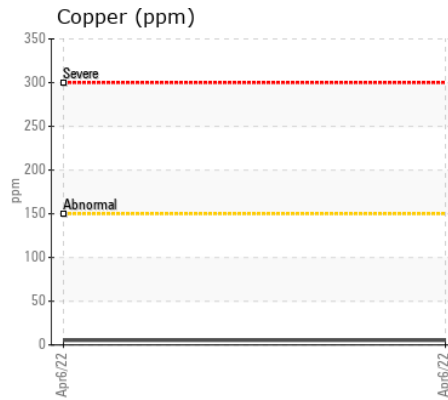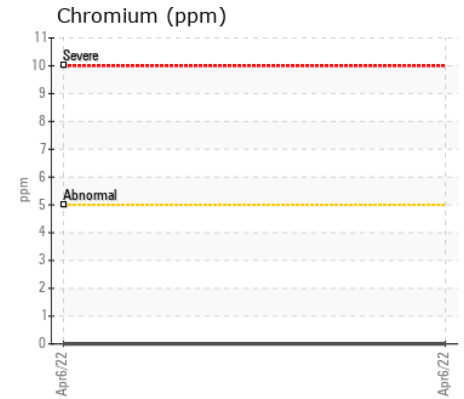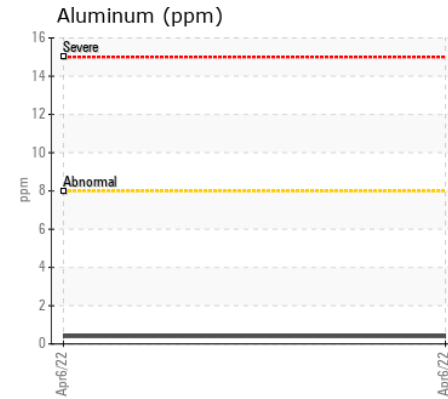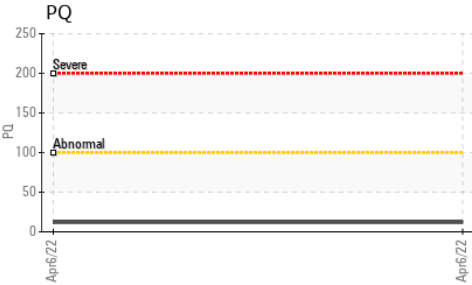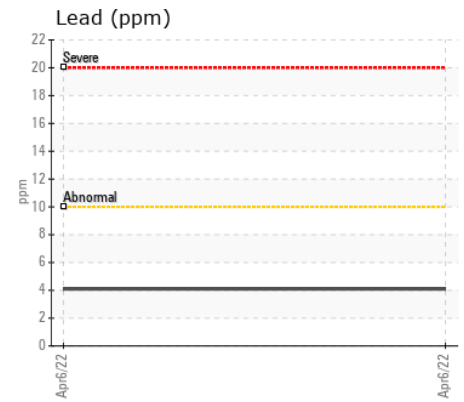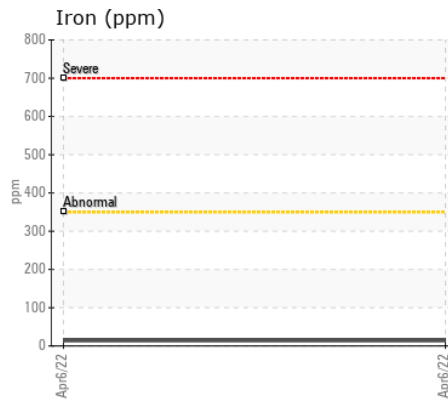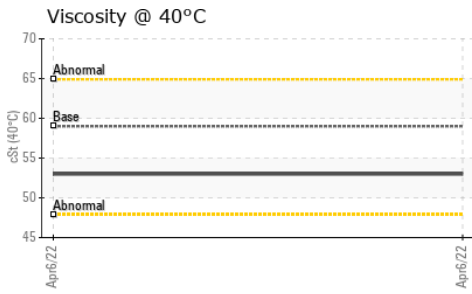

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0097916

Lab Number : 05514473

Unique Number : 9928752

Test Package : MOBCE (Additional Tests: PQ)

Received : 08 Apr 2022

Tested : 11 Apr 2022

Diagnosed : 11 Apr 2022 - Don Baldrige

JRE - HOPE MILLS/FAYETTEVILLE

5039 HWY 301 SOUTH

HOPE MILLS, NC

US 28348

Contact: FAYETTEVILLE SHOP

stephen.mullis@jamesriverequipment.com;canastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: