



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
Store 2 - Beaver [RO#126963]
Machine Id
JOHN DEERE 350G 1FF350GXCKF813929
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: no service history)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0025640	---	---
Sample Date		Client Info		06 Apr 2022	---	---
Machine Age	hrs	Client Info		966	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	94	---	---
Chromium	ppm	ASTM D5185m	>11	2	---	---
Nickel	ppm	ASTM D5185m	>5	8	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>31	5	---	---
Lead	ppm	ASTM D5185m	>26	3	---	---
Copper	ppm	ASTM D5185m	>26	▲ 114	---	---
Tin	ppm	ASTM D5185m	>4	3	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	9	---	---
Potassium	ppm	ASTM D5185m	>20	9	---	---
Fuel	%	ASTM D3524	>2.1	0.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.0	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	8	---	---
Boron	ppm	ASTM D5185m		115	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		215	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		789	---	---
Calcium	ppm	ASTM D5185m		1515	---	---
Phosphorus	ppm	ASTM D5185m		743	---	---
Zinc	ppm	ASTM D5185m		935	---	---
Sulfur	ppm	ASTM D5185m		2102	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.6	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.9	---	---

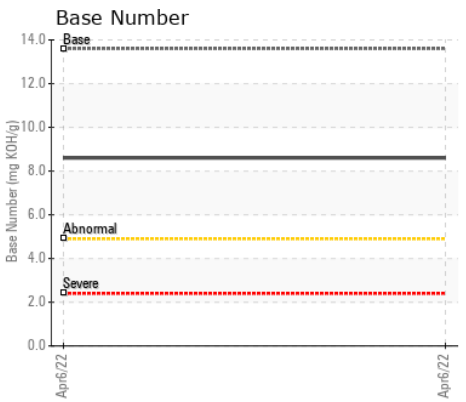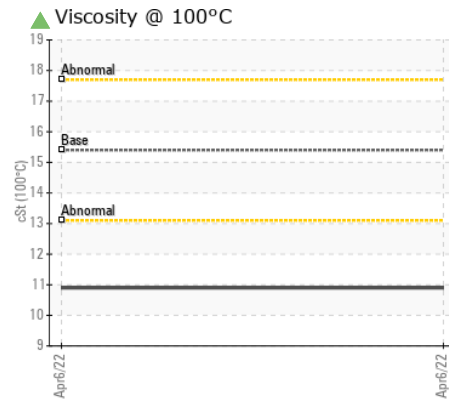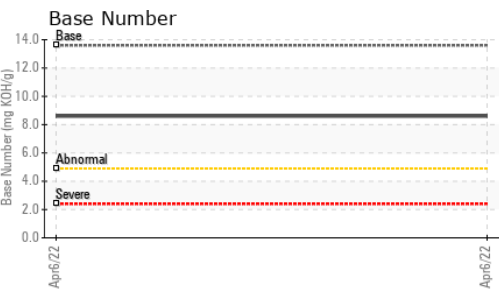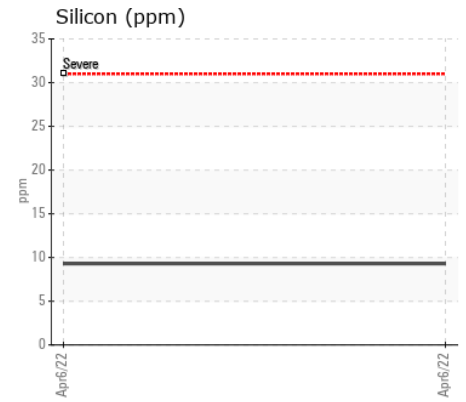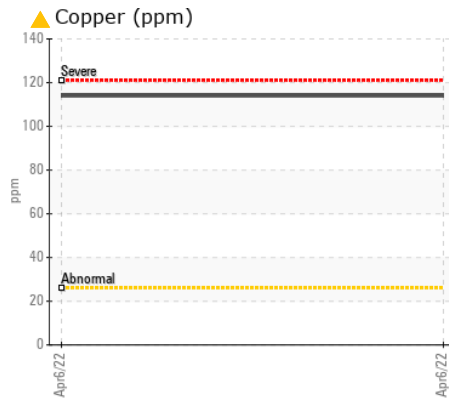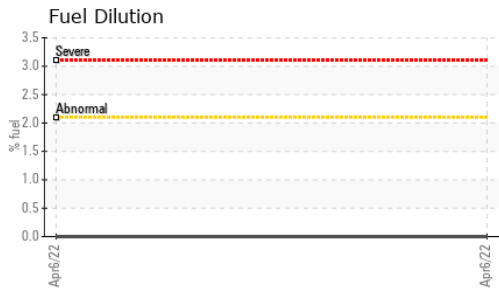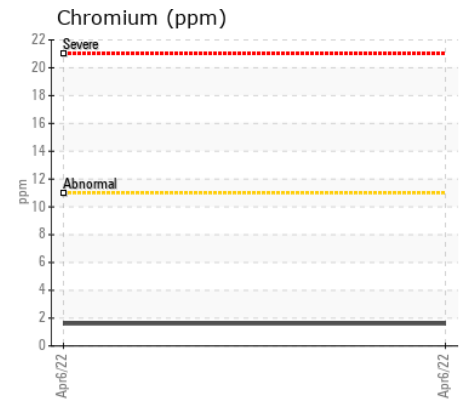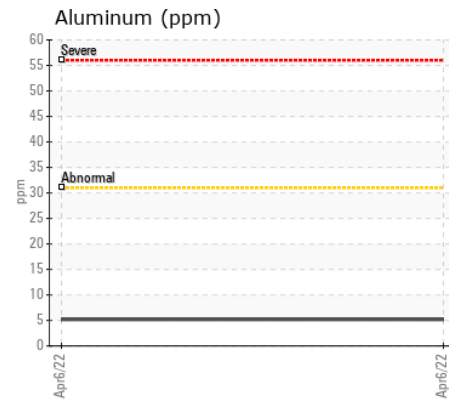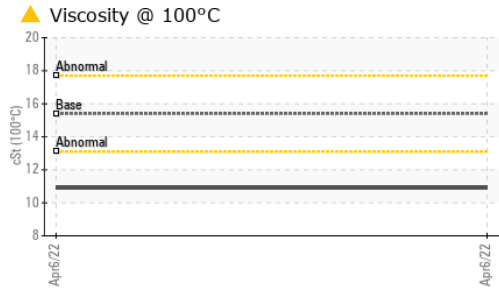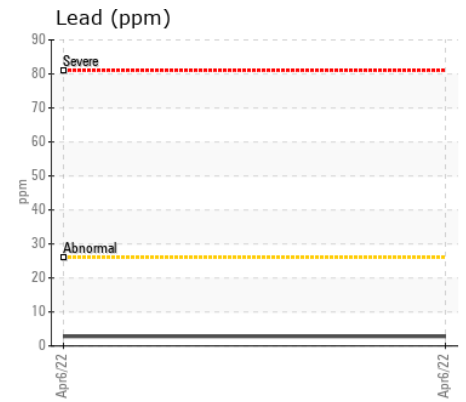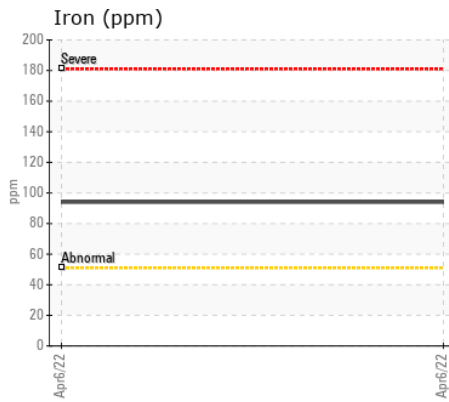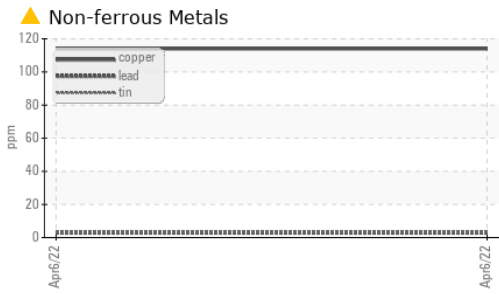

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0025640 **Received** : 12 Apr 2022
Lab Number : 05516592 **Diagnosed** : 14 Apr 2022
Unique Number : 9930871 **Diagnostician** : Jonathan Hester
Test Package : MOBCE (Additional Tests: FuelDilution, PercentFuel, TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)